

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	652.2 cd per klm.
(Luminaire orientation as tested.)	-14.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	96.4V x 94.1H
	At 50% of Imax	83.6V x 82.7H
	At 90% of Imax	46.0V x 45.7H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	959.8 lumens per klm.
	To 50% of Imax	877.4 lumens per klm.
	To 90% of Imax	347.8 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:751.739x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-3000K-5AH高亮	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

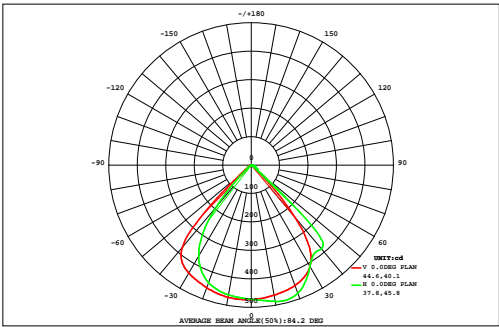

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL	--	Imax(cd)	490.3
NOMINAL POWER(W)		AVAILABILITY(%)	96.0
RATED VOLTAGE(V)		Avai. FLUX(lm)	721.6
NOMINAL FLUX(lm)	751.739	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	751.7
TEST VOLTAGE(V)	--	θ @50%(H,V)	83,84DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
80	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.02	0.01	0.01	0.00	0.34	0.00
70	0.00	0.00	0.01	0.03	0.06	0.10	0.13	0.14	0.14	0.14	0.14	0.12	0.09	0.06	0.03	0.01	0.00	1.22	0.00
60	0.00	0.00	0.02	0.06	0.12	0.18	0.24	0.31	0.38	0.38	0.31	0.24	0.18	0.12	0.07	0.03	0.01	2.63	0.00
50	0.00	0.01	0.03	0.10	0.18	0.29	0.64	1.49	2.35	2.51	1.80	0.76	0.29	0.18	0.10	0.04	0.01	10.8	6.85
40	0.00	0.01	0.05	0.13	0.25	0.93	3.67	6.94	8.66	9.01	7.99	5.01	1.50	0.30	0.14	0.06	0.01	44.7	42.7
30	0.00	0.01	0.06	0.16	0.49	3.60	8.26	11.1	12.3	12.5	11.8	9.84	5.64	0.97	0.18	0.07	0.02	77.0	75.6
	0.00	0.01	0.07	0.19	1.20	6.66	10.8	12.7	13.6	13.8	13.2	11.7	8.78	2.68	0.24	0.08	0.02	95.6	94.5
	0.00	0.01	0.07	0.20	1.96	8.31	11.8	13.3	14.1	14.2	13.6	12.2	10.1	4.24	0.31	0.09	0.02	104	103
	0.00	0.01	0.08	0.21	2.24	8.79	12.0	13.5	14.3	14.5	13.9	12.4	10.3	4.63	0.33	0.09	0.02	107	106
	0.00	0.01	0.07	0.20	1.78	8.32	11.8	13.4	14.5	14.7	13.8	12.0	9.78	3.67	0.29	0.09	0.02	104	103
	0.00	0.01	0.06	0.17	0.79	6.36	11.1	12.6	13.5	13.6	12.6	11.1	8.54	1.70	0.24	0.09	0.02	92.5	91.2
-30	0.00	0.01	0.05	0.14	0.31	2.22	8.21	11.3	11.9	11.8	11.4	9.82	3.99	0.53	0.20	0.08	0.02	71.9	70.1
-40	0.00	0.01	0.04	0.10	0.20	0.40	1.53	4.62	7.14	7.54	5.70	2.40	0.66	0.32	0.16	0.06	0.01	30.9	27.6
-50	0.00	0.00	0.02	0.07	0.14	0.22	0.36	0.52	0.68	0.72	0.63	0.49	0.35	0.22	0.11	0.04	0.01	4.60	0.00
-60	0.00	0.00	0.01	0.04	0.07	0.13	0.20	0.27	0.33	0.34	0.32	0.27	0.21	0.13	0.07	0.02	0.01	2.44	0.00
-70	0.00	0.00	0.00	0.01	0.02	0.04	0.07	0.10	0.13	0.13	0.12	0.11	0.08	0.05	0.02	0.01	0.00	0.92	0.00
-80	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.11	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Φ t	0.01	0.12	0.66	1.81	9.85	46.6	80.8	102	114	116	107	88.5	60.5	19.8	2.51	0.88	0.22	0.02	752
Φ a	0.00	0.00	0.00	0.00	6.68	44.3	78.6	100	112	114	105	86.2	58.1	16.8	0.00	0.00	0.00	0.00	722


one-half-peak spread: U:5.9,D:37.9 , L:39.4,R:43.4 NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:751.739x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-3000K-5AH高亮	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

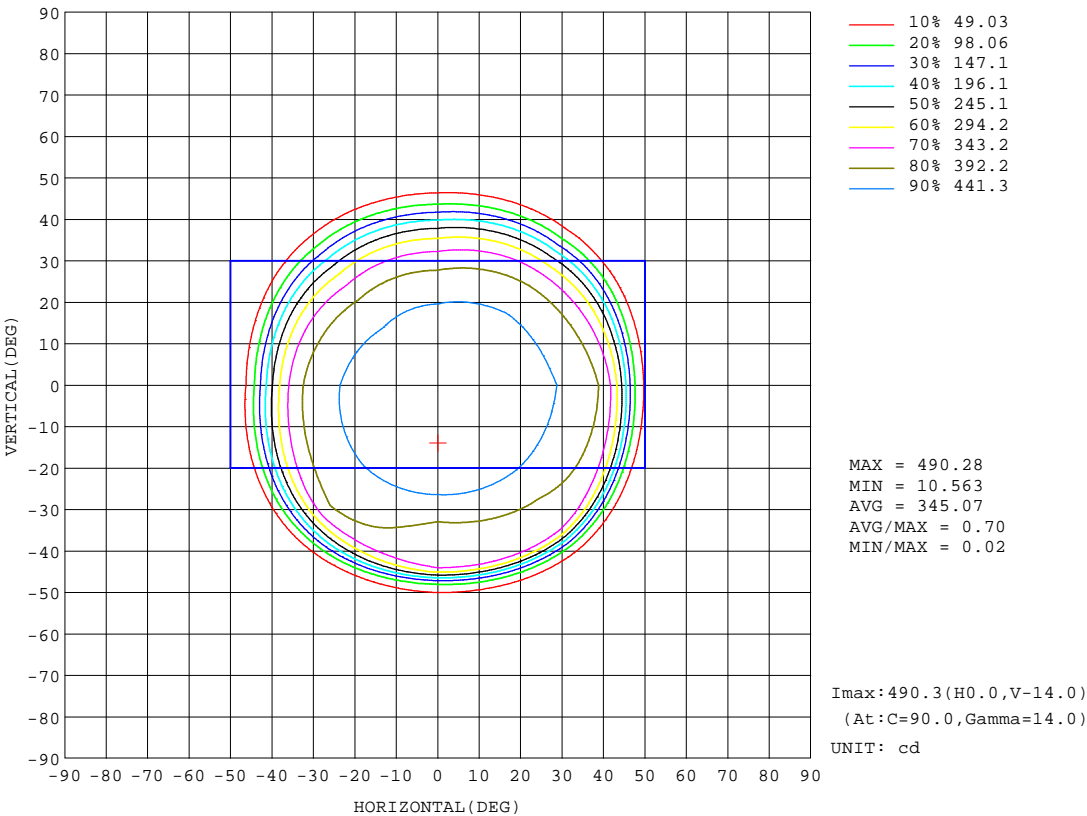


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:751.739x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-3000K-5AH高亮	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

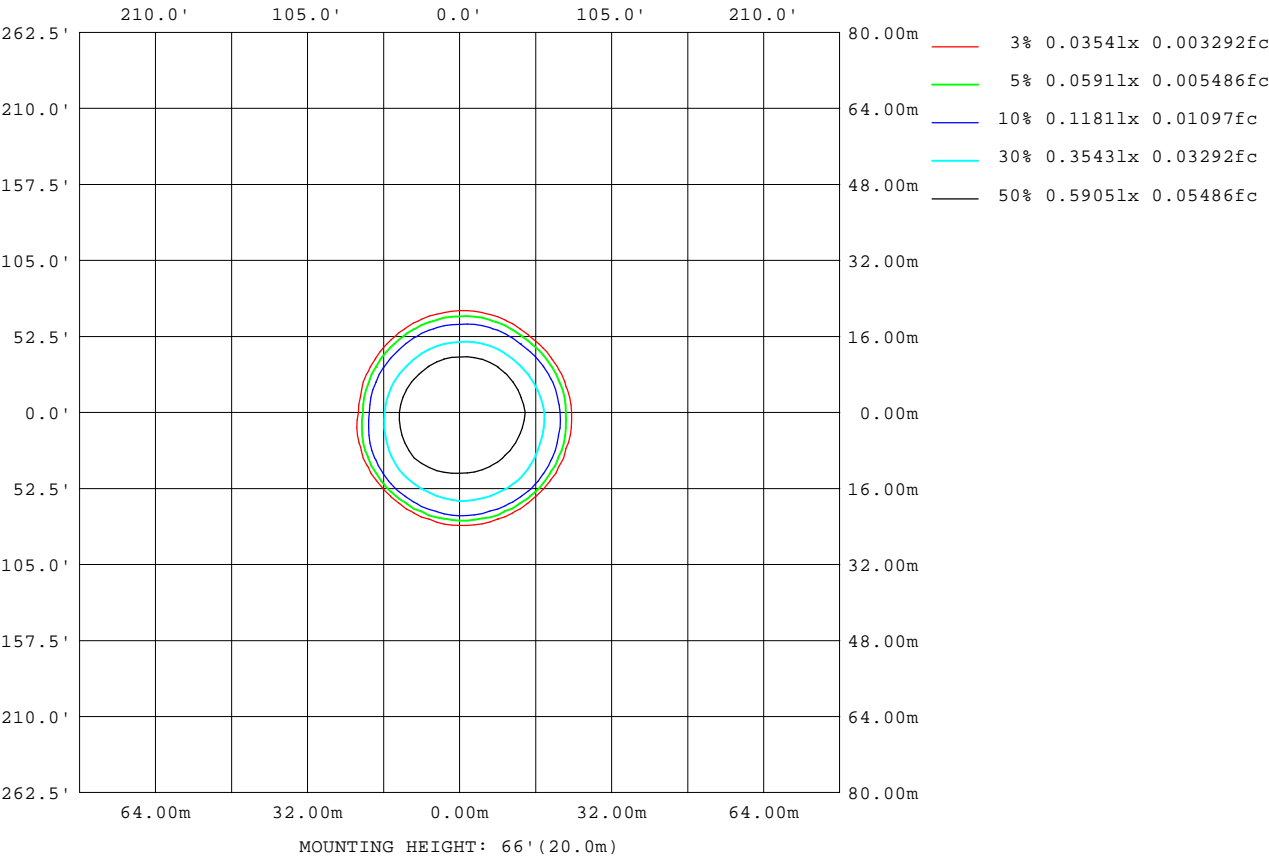

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

Planar Illuminance Curve

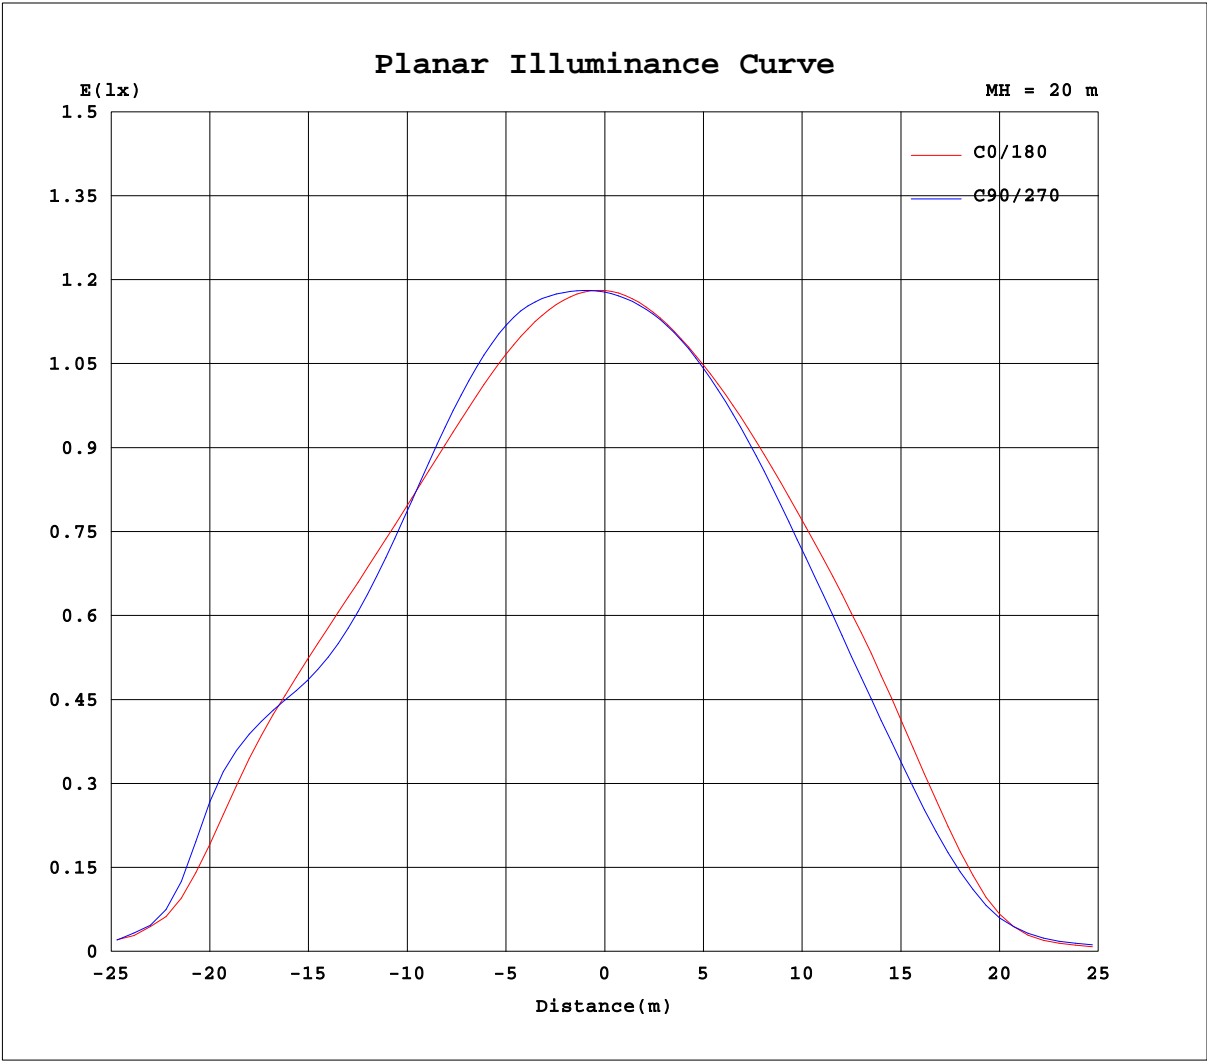


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

AAI Figure

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:751.739x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-3000K-5AH高亮	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

Flux out:644.0 lm

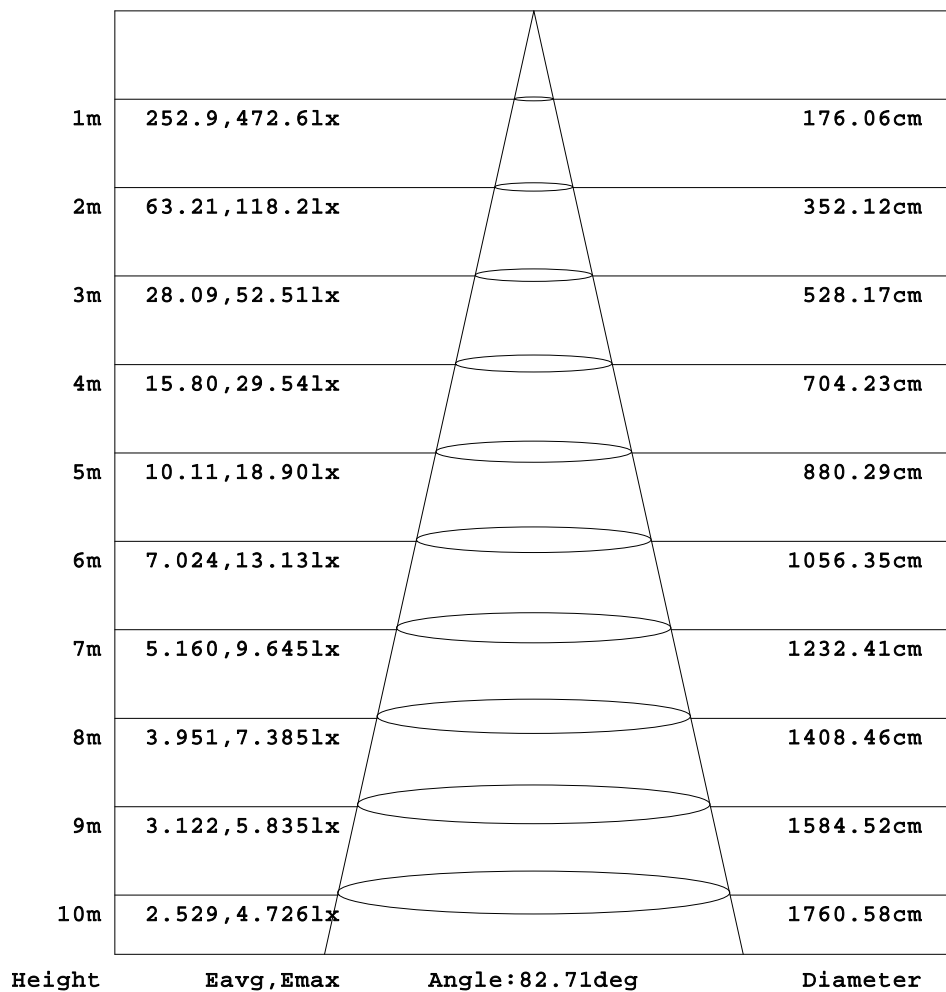

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:751.739x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-3000K-5AH高亮	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.150*0.105	Shielding Angle:

Table--1																	UNIT: cd		
H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.08	0.11	0.13	0.16	0.18	0.21	0.23	0.26	0.28	0.31	0.31	0.31	0.31	0.30	0.30	0.30	0.30	0.30	0.30
-85	0.08	0.11	0.14	0.16	0.18	0.20	0.23	0.25	0.27	0.29	0.29	0.28	0.28	0.28	0.27	0.27	0.27	0.26	0.26
-80	0.08	0.12	0.13	0.15	0.18	0.20	0.23	0.26	0.29	0.33	0.40	0.46	0.50	0.53	0.56	0.57	0.56	0.53	0.49
-75	0.08	0.11	0.13	0.15	0.19	0.24	0.34	0.53	0.78	1.04	1.34	1.72	2.11	2.41	2.75	3.34	3.88	4.33	4.63
-70	0.08	0.11	0.13	0.17	0.24	0.45	0.78	1.14	1.66	2.13	2.90	3.57	4.26	4.97	5.77	6.63	7.49	8.22	8.80
-65	0.08	0.10	0.13	0.21	0.44	0.83	1.33	1.90	2.73	3.38	4.13	5.44	6.62	7.57	8.35	9.03	9.69	10.3	10.8
-60	0.08	0.10	0.14	0.30	0.72	1.25	1.96	2.85	3.67	4.84	5.99	7.08	8.15	9.25	10.7	12.1	13.4	14.5	15.4
-55	0.08	0.10	0.16	0.45	0.95	1.65	2.68	3.72	5.12	6.29	7.30	8.72	10.6	12.9	15.2	17.5	19.6	21.3	22.7
-50	0.08	0.10	0.19	0.63	1.26	2.21	3.36	4.90	6.31	7.58	9.09	11.4	14.4	17.8	21.0	25.5	33.5	43.9	50.0
-45	0.08	0.10	0.23	0.77	1.50	2.72	4.25	5.93	7.44	9.26	11.7	14.9	19.2	31.8	68.1	135	215	271	303
-40	0.08	0.10	0.31	0.90	1.85	3.23	5.10	6.85	8.71	11.5	14.8	20.6	55.2	161	275	340	370	380	384
-35	0.08	0.10	0.38	1.05	2.15	3.82	5.82	7.72	10.4	13.8	19.4	63.1	199	322	377	389	390	388	383
-30	0.08	0.11	0.44	1.17	2.45	4.31	6.47	8.66	11.9	15.9	44.0	174	321	391	404	408	412	414	413
-25	0.08	0.11	0.50	1.25	2.66	4.81	7.06	9.77	13.3	21.9	106	269	371	410	422	429	439	447	452
-20	0.08	0.11	0.55	1.32	2.92	5.22	7.49	10.6	14.1	37.5	170	322	390	419	435	447	459	471	479
-15	0.08	0.11	0.60	1.39	3.11	5.47	7.83	11.2	15.2	59.0	218	346	402	428	444	456	469	480	490
-10	0.08	0.11	0.63	1.43	3.22	5.66	8.11	11.6	16.8	77.0	243	358	410	434	449	461	469	478	486
-5	0.08	0.11	0.64	1.44	3.27	5.76	8.26	11.7	18.0	83.0	250	363	413	437	451	461	468	472	477
0	0.08	0.11	0.65	1.41	3.24	5.76	8.25	11.6	17.8	75.8	241	359	413	437	450	458	464	469	472
5	0.08	0.10	0.63	1.41	3.25	5.72	8.17	11.4	17.2	69.5	225	344	402	429	445	454	460	465	467
10	0.08	0.10	0.61	1.39	3.19	5.59	7.95	11.1	15.5	54.6	194	318	383	416	435	447	454	460	463
15	0.08	0.10	0.57	1.33	3.08	5.36	7.62	10.6	13.8	37.7	149	276	354	395	419	434	445	452	454
20	0.08	0.10	0.52	1.25	2.88	5.09	7.25	9.98	12.6	25.0	94.1	217	308	360	392	414	429	437	440
25	0.08	0.10	0.45	1.16	2.59	4.65	6.79	9.14	11.7	17.2	48.8	142	240	306	351	382	400	409	413
30	0.08	0.09	0.40	1.04	2.33	4.15	6.18	8.07	10.6	13.1	24.5	68.8	150	228	289	328	353	366	370
35	0.08	0.09	0.34	0.90	1.99	3.67	5.53	7.25	9.30	11.4	14.8	28.0	65.6	129	195	244	277	295	301
40	0.08	0.09	0.27	0.74	1.63	3.14	4.82	6.40	7.91	9.84	11.6	14.9	24.9	47.4	84.7	127	161	183	191
45	0.08	0.09	0.20	0.62	1.31	2.52	4.04	5.52	6.84	8.13	9.75	11.3	13.8	18.4	27.1	39.5	53.2	64.2	68.5
50	0.08	0.08	0.16	0.49	0.99	1.92	3.21	4.55	5.78	6.85	7.89	8.98	10.4	12.1	14.2	16.5	19.2	21.3	22.5
55	0.08	0.08	0.13	0.34	0.69	1.38	2.35	3.54	4.68	5.69	6.48	7.08	7.62	8.29	9.17	10.3	11.5	12.3	12.8
60	0.08	0.08	0.10	0.22	0.50	0.87	1.56	2.45	3.45	4.44	5.24	5.63	5.97	6.25	6.45	6.55	6.58	6.50	6.33
65	0.08	0.08	0.09	0.14	0.29	0.51	0.86	1.48	2.17	2.91	3.65	4.10	4.44	4.66	4.80	4.86	4.88	4.83	4.70
70	0.08	0.08	0.09	0.10	0.15	0.26	0.42	0.62	1.00	1.57	1.95	2.31	2.57	2.80	2.99	3.08	3.08	3.01	2.88
75	0.08	0.09	0.08	0.09	0.10	0.13	0.17	0.23	0.31	0.42	0.59	0.78	0.94	1.13	1.24	1.26	1.25	1.21	1.13
80	0.08	0.09	0.08	0.08	0.09	0.09	0.10	0.11	0.11	0.10	0.13	0.15	0.17	0.20	0.23	0.25	0.26	0.26	0.25
85	0.08	0.09	0.09	0.09	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.10	0.10	0.10	0.10	0.10	0.10
90	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.09	0.09	0.09	0.09

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:751.739x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-3000K-5AH高亮	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.150*0.105	Shielding Angle:

Table--2																	UNIT: cd		
H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.30	0.30	0.31	0.31	0.31	0.31	0.32	0.32	0.32	0.32	0.32	0.32	0.32	0.31	0.31	0.31	0.31	0.31	
-85	0.26	0.26	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.28	0.28	0.29	0.29	0.29	0.29	0.30	0.30	0.31	
-80	0.67	0.84	0.98	1.08	1.14	1.11	0.99	0.87	0.74	0.49	0.34	0.29	0.28	0.28	0.29	0.29	0.30	0.31	
-75	4.62	4.47	4.21	3.90	3.73	3.50	3.20	2.88	2.48	1.88	1.31	0.85	0.51	0.31	0.28	0.29	0.29	0.31	
-70	8.63	8.27	7.74	7.15	6.65	6.18	5.72	5.30	4.57	3.44	2.55	1.77	1.11	0.66	0.32	0.29	0.29	0.31	
-65	10.8	10.8	10.7	10.5	10.2	9.59	8.47	6.94	6.05	5.09	3.98	2.73	1.80	1.07	0.56	0.29	0.29	0.31	
-60	15.4	15.0	14.4	13.6	12.6	11.8	11.0	10.2	8.48	6.30	5.09	3.87	2.50	1.53	0.83	0.31	0.29	0.31	
-55	22.5	21.9	20.8	19.3	17.5	15.6	13.9	12.3	10.3	8.60	6.23	4.73	3.33	1.98	1.11	0.46	0.29	0.31	
-50	47.5	39.4	32.4	27.5	24.0	21.2	18.1	15.1	12.2	9.93	7.99	5.57	4.01	2.42	1.35	0.62	0.29	0.31	
-45	292	254	181	105	50.5	30.9	23.6	18.9	14.5	11.3	8.97	6.84	4.60	2.96	1.56	0.77	0.29	0.31	
-40	384	383	378	355	259	110	38.7	23.4	17.6	13.0	9.94	7.69	5.21	3.38	1.78	0.85	0.29	0.31	
-35	385	385	385	386	381	331	138	37.6	21.1	14.9	10.9	8.25	5.95	3.74	1.96	0.95	0.29	0.31	
-30	413	409	401	392	387	381	309	100	29.1	17.3	11.9	8.77	6.44	4.06	2.15	1.07	0.30	0.31	
-25	450	442	430	415	399	389	367	226	46.9	19.9	12.9	9.16	6.76	4.30	2.34	1.15	0.31	0.31	
-20	476	469	456	439	420	402	384	311	93.1	24.4	13.9	9.47	6.94	4.55	2.47	1.18	0.31	0.31	
-15	488	483	473	455	436	417	397	347	149	31.3	14.8	9.67	6.98	4.72	2.54	1.19	0.31	0.31	
-10	487	487	477	462	446	428	407	366	197	37.9	15.3	9.68	6.97	4.79	2.57	1.19	0.32	0.31	
-5	480	479	474	462	449	435	416	374	218	42.7	15.5	9.51	6.85	4.76	2.55	1.18	0.32	0.31	
0	473	471	466	458	449	438	421	377	217	43.6	15.2	9.15	6.63	4.66	2.48	1.16	0.32	0.31	
5	467	467	463	455	445	432	409	356	194	39.7	14.6	9.01	6.55	4.59	2.45	1.15	0.32	0.31	
10	463	462	458	450	438	421	391	324	153	32.9	13.5	8.72	6.38	4.46	2.37	1.13	0.31	0.31	
15	456	454	450	440	426	403	361	273	102	25.4	12.2	8.30	6.13	4.28	2.26	1.10	0.31	0.31	
20	441	440	434	424	404	372	314	198	57.7	18.5	10.9	7.78	5.85	4.00	2.11	1.07	0.30	0.31	
25	416	414	407	393	365	317	236	110	30.2	14.0	9.64	7.22	5.44	3.62	1.92	1.03	0.30	0.31	
30	375	372	361	338	294	226	130	44.9	18.0	11.5	8.61	6.64	4.95	3.27	1.70	0.94	0.29	0.31	
35	306	301	282	246	186	105	44.6	19.2	12.4	9.65	7.59	5.98	4.45	2.87	1.48	0.84	0.28	0.31	
40	195	185	159	116	67.5	31.1	15.8	11.9	10.1	8.26	6.67	5.29	3.90	2.41	1.31	0.76	0.28	0.31	
45	69.5	61.6	48.4	31.4	19.5	13.1	10.5	9.70	8.40	6.96	5.74	4.49	3.20	1.98	1.15	0.69	0.28	0.31	
50	21.5	19.3	16.3	13.8	11.6	9.98	8.88	7.97	6.84	5.82	4.75	3.71	2.58	1.53	0.98	0.57	0.27	0.31	
55	12.2	11.3	10.2	9.06	8.24	7.67	7.02	6.31	5.52	4.64	3.80	2.83	1.91	1.22	0.82	0.43	0.27	0.31	
60	6.51	6.58	6.54	6.42	6.16	5.82	5.37	4.84	4.15	3.49	2.74	2.00	1.30	0.94	0.66	0.28	0.27	0.31	
65	4.80	4.81	4.75	4.62	4.41	4.11	3.73	3.36	2.80	2.38	1.77	1.23	0.96	0.70	0.49	0.26	0.27	0.31	
70	2.96	2.98	2.96	2.86	2.65	2.43	2.27	1.98	1.63	1.25	1.02	0.81	0.63	0.50	0.27	0.25	0.27	0.31	
75	1.21	1.26	1.28	1.25	1.17	1.05	0.92	0.85	0.77	0.63	0.52	0.46	0.38	0.25	0.23	0.25	0.27	0.31	
80	0.30	0.33	0.35	0.35	0.32	0.32	0.30	0.27	0.23	0.24	0.23	0.19	0.20	0.21	0.23	0.25	0.28	0.31	
85	0.10	0.11	0.11	0.11	0.11	0.11	0.11	0.10	0.10	0.12	0.14	0.16	0.18	0.21	0.23	0.25	0.28	0.31	
90	0.09	0.09	0.09	0.09	0.09	0.10	0.10	0.10	0.10	0.12	0.15	0.17	0.19	0.22	0.24	0.26	0.29	0.31	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	471.5	471.5	471.5	471.5	471.5	471.5	471.5	471.5
3.0	472.4	474.5	474.8	472.6	470.0	468.7	469.1	470.1
6.0	472.3	478.5	479.1	473.0	467.5	465.7	466.9	468.6
9.0	471.1	482.8	484.6	472.9	464.3	461.7	464.3	466.7
12.0	468.9	486.2	489.5	471.7	460.8	457.1	460.7	464.6
15.0	465.5	486.9	490.3	468.9	457.1	451.6	454.8	461.6
18.0	460.9	482.5	485.6	463.9	453.1	444.3	446.8	457.3
21.0	455.5	473.5	475.5	457.1	447.2	433.8	435.7	450.4
24.0	449.9	460.8	458.7	448.5	439.1	419.3	419.4	441.2
27.0	444.1	445.0	437.3	439.1	428.0	398.9	398.1	428.6
30.0	437.6	426.8	413.1	429.6	412.1	370.4	370.4	410.7
33.0	428.7	407.6	392.2	419.9	385.8	331.1	332.4	383.6
36.0	415.2	392.4	381.1	407.7	341.1	279.7	282.8	343.3
39.0	389.6	386.5	383.8	384.3	270.0	210.3	216.4	281.2
42.0	335.7	382.2	379.0	315.9	173.7	129.6	138.9	195.3
45.0	216.7	325.6	303.1	191.1	75.63	61.92	68.55	98.92
48.0	83.36	137.2	100.7	63.08	27.11	26.75	32.68	35.59
51.0	33.97	40.04	33.11	21.38	14.51	15.14	19.78	15.16
54.0	17.53	24.75	24.75	15.49	12.04	11.60	14.51	10.78
57.0	11.98	20.08	19.75	12.12	10.37	9.814	9.266	9.564
60.0	9.132	15.99	15.43	9.546	8.234	8.099	6.331	8.202
63.0	7.477	13.06	11.92	7.728	6.794	6.838	5.314	6.696
66.0	6.200	10.99	10.46	6.481	5.218	5.778	4.279	5.460
69.0	4.990	9.155	9.660	5.133	3.673	4.675	3.207	4.207
72.0	3.730	6.482	6.793	3.643	2.392	3.231	2.128	2.976
75.0	2.478	5.271	4.636	2.697	1.409	1.920	1.132	1.961
78.0	1.522	3.335	1.922	1.543	0.8631	0.7675	0.4847	0.9440
81.0	1.084	1.717	0.3482	0.6486	0.4677	0.1961	0.1812	0.4187
84.0	0.5671	0.2926	0.2593	0.2951	0.1446	0.0976	0.1056	0.1621
87.0	0.2863	0.2789	0.2670	0.2972	0.0814	0.0896	0.0897	0.0958
90.0	0.3081	0.3206	0.2990	0.3091	0.0815	0.0816	0.0877	0.0997

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks: