

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	599.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	-2.0 degrees horizontal

Beam Spread	At 10% of Imax	100.1V x 98.5H
	At 50% of Imax	89.4V x 87.0H
	At 90% of Imax	49.3V x 70.1H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	962.0 lumens per klm.
	To 50% of Imax	886.8 lumens per klm.
	To 90% of Imax	462.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
------------------------------------------	---------

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1191.17x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-4000K-10AH-高亮	DIM.: 0.250*0.215	SERIAL No.:
MFR.: EVERFINE	SUR.:0.200*0.145	Shielding Angle:

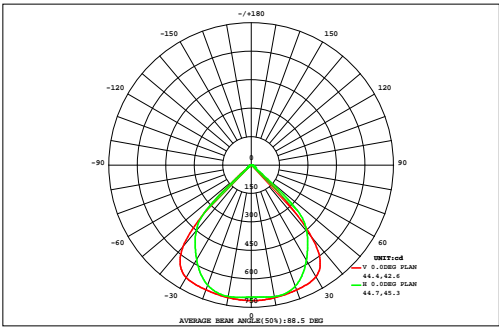

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL	--	Imax(cd)	714.0
NOMINAL POWER(W)		AVAILABILITY(%)	96.1
RATED VOLTAGE(V)		Avai. FLUX(lm)	1145
NOMINAL FLUX(lm)	1191.17	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1191
TEST VOLTAGE(V)	--	θ @50%(H,V)	87,89DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.15	0.00
80	0.00	0.00	0.01	0.03	0.06	0.10	0.13	0.16	0.17	0.17	0.16	0.13	0.10	0.06	0.03	0.01	0.00	1.33	0.00
70	0.00	0.01	0.03	0.08	0.15	0.23	0.30	0.37	0.42	0.42	0.37	0.30	0.23	0.15	0.08	0.04	0.01	3.19	0.00
60	0.00	0.01	0.05	0.13	0.24	0.39	0.56	0.73	0.89	0.89	0.74	0.57	0.39	0.25	0.13	0.06	0.02	6.06	0.00
50	0.00	0.02	0.07	0.18	0.37	0.70	2.17	5.76	8.40	8.52	6.08	2.45	0.73	0.37	0.19	0.08	0.02	36.1	31.0
40	0.00	0.02	0.09	0.24	0.57	3.28	10.5	14.5	15.7	15.8	14.9	11.1	3.96	0.63	0.25	0.10	0.03	91.7	89.0
30	0.00	0.03	0.11	0.30	1.46	9.42	15.5	18.0	19.1	19.1	18.2	16.0	10.5	2.04	0.31	0.12	0.03	130	128
	0.00	0.03	0.12	0.35	3.47	13.3	17.7	19.8	20.9	20.8	19.7	17.9	14.1	4.74	0.39	0.13	0.04	154	152
	0.00	0.03	0.12	0.39	4.93	15.1	18.8	20.5	21.3	21.2	20.4	18.8	15.6	6.62	0.49	0.14	0.04	164	163
	0.00	0.03	0.12	0.39	5.01	15.2	18.8	20.5	21.2	21.3	20.5	18.9	15.6	6.75	0.49	0.14	0.04	165	164
	0.00	0.03	0.12	0.36	3.70	13.6	18.0	19.8	20.9	21.0	19.9	18.0	14.2	5.15	0.40	0.13	0.04	155	154
	0.00	0.03	0.11	0.30	1.69	10.0	16.1	18.3	19.3	19.3	18.3	16.1	11.2	2.48	0.31	0.12	0.03	134	132
-30	0.00	0.02	0.09	0.24	0.61	3.94	11.4	15.0	15.9	15.9	15.1	12.2	5.18	0.70	0.25	0.10	0.03	96.7	94.3
-40	0.00	0.02	0.07	0.18	0.37	0.76	2.76	6.68	9.28	9.51	7.34	3.41	0.85	0.37	0.19	0.08	0.02	41.9	37.7
-50	0.00	0.01	0.05	0.13	0.25	0.40	0.59	0.80	1.03	1.04	0.80	0.58	0.40	0.25	0.14	0.06	0.02	6.55	0.20
-60	0.00	0.01	0.03	0.08	0.15	0.23	0.32	0.40	0.45	0.45	0.40	0.32	0.24	0.16	0.09	0.04	0.01	3.38	0.00
-70	0.00	0.00	0.01	0.03	0.06	0.10	0.13	0.16	0.18	0.18	0.17	0.15	0.11	0.08	0.04	0.02	0.01	1.46	0.00
-80	0.00	0.00	0.00	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.32	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Φ t	0.02	0.31	1.23	3.44	23.1	86.7	134	162	175	176	163	137	93.5	30.8	3.81	1.38	0.39	0.05	1191
Φ a	0.00	0.00	0.00	0.00	18.1	83.0	130	158	172	172	160	134	90.1	26.7	0.00	0.00	0.00	0.00	1145


one-half-peak spread: U:33.6,D:35.4 , L:40.6,NEMA Beam Type: Type 5 x 6 (H x V)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1191.17x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-4000K-10AH-高亮	DIM.: 0.250*0.215	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.200*0.145	Shielding Angle:

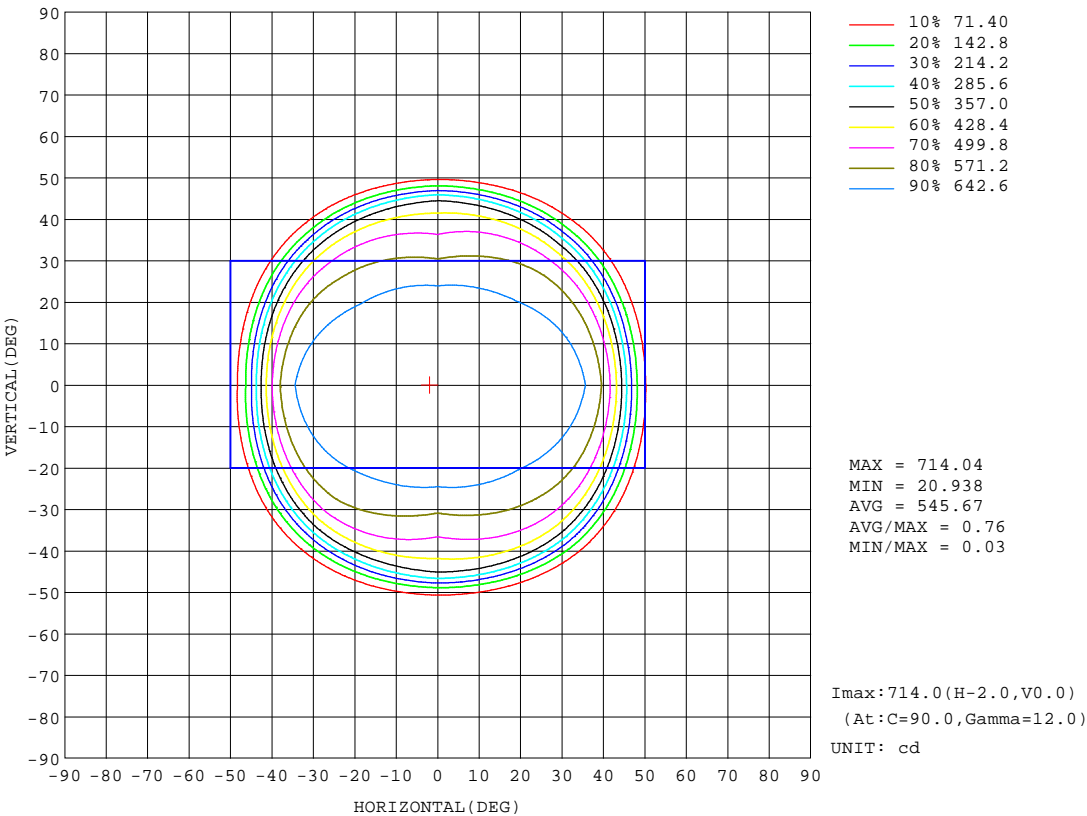


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1191.17x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-4000K-10AH-高亮	DIM.: 0.250*0.215	SERIAL No.:
MFR.: EVERFINE	SUR.:0.200*0.145	Shielding Angle:

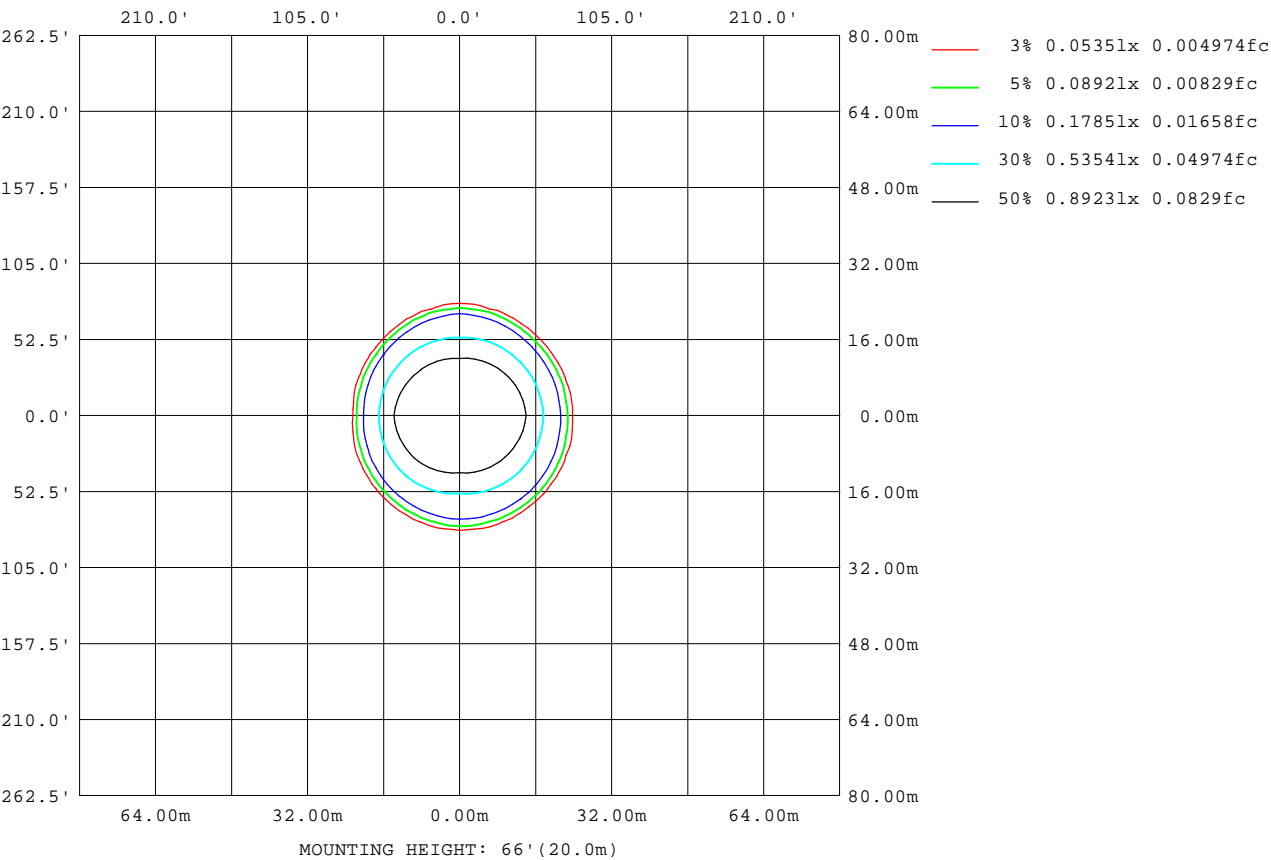

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

Planar Illuminance Curve

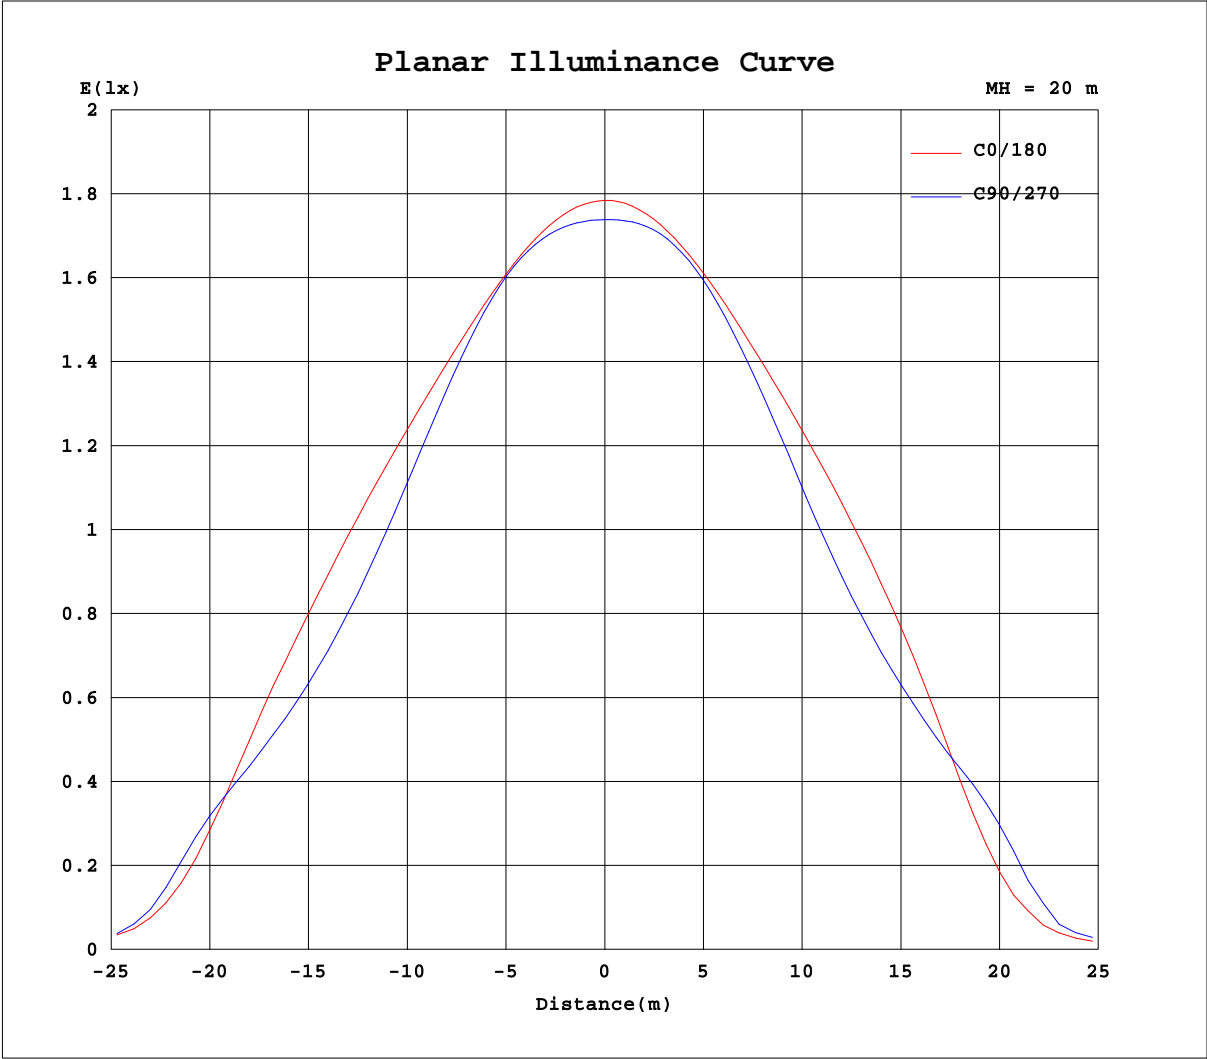


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

AAI Figure

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1191.17x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-4000K-10AH-高亮	DIM.: 0.250*0.215	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.200*0.145	Shielding Angle:

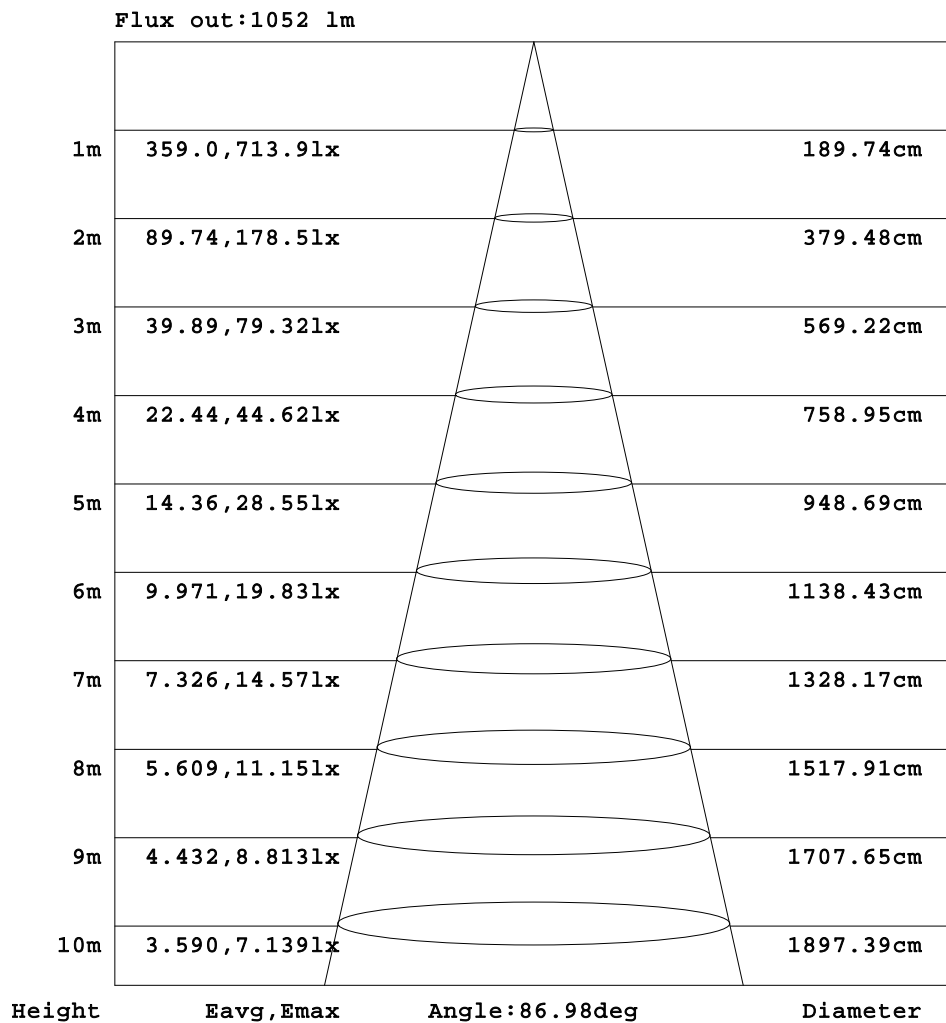

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1191.17x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.: 荣星透镜3CCT-4000K-10AH-高亮									DIM.: 0.250*0.215						SERIAL No.:		
MFR.: EVERFINE									SUR.: 0.200*0.145						Shielding Angle:		

Table--1

UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.12	0.17	0.23	0.28	0.34	0.39	0.44	0.50	0.55	0.61	0.61	0.61	0.61	0.61	0.61	0.61	0.62	0.62	0.62
-85	0.12	0.17	0.22	0.27	0.31	0.36	0.40	0.43	0.48	0.52	0.52	0.54	0.57	0.58	0.59	0.59	0.59	0.58	0.57
-80	0.12	0.17	0.22	0.26	0.30	0.37	0.52	0.83	1.17	1.50	1.77	2.06	2.34	2.60	2.81	3.00	3.16	3.30	3.39
-75	0.12	0.17	0.21	0.26	0.43	0.91	1.48	1.99	2.47	2.81	3.22	3.80	4.35	4.80	5.13	5.38	5.56	5.67	5.73
-70	0.12	0.17	0.21	0.36	1.04	1.76	2.37	2.84	3.70	4.77	5.59	6.27	7.03	7.64	8.17	8.63	9.02	9.28	9.40
-65	0.12	0.17	0.23	0.77	1.69	2.37	3.14	4.39	5.50	6.81	8.13	9.28	10.5	11.6	12.6	13.5	14.2	14.8	15.2
-60	0.12	0.16	0.28	1.29	2.17	3.01	4.41	5.73	7.42	9.21	10.9	12.5	14.0	15.7	17.2	18.5	19.6	20.5	21.1
-55	0.12	0.16	0.48	1.69	2.53	3.97	5.42	7.33	9.37	11.5	13.7	15.9	18.3	20.8	23.6	25.8	27.2	28.2	28.8
-50	0.12	0.16	0.76	1.98	3.07	4.69	6.63	8.84	11.3	14.0	17.0	20.4	24.3	28.0	35.1	47.0	64.8	82.9	92.2
-45	0.12	0.16	1.06	2.20	3.72	5.46	7.74	10.3	13.5	17.0	21.3	26.3	37.4	68.3	142	231	302	342	361
-40	0.12	0.16	1.30	2.44	4.18	6.25	8.77	12.0	15.9	20.5	26.7	46.0	119	254	367	424	451	459	456
-35	0.12	0.16	1.49	2.71	4.54	6.88	9.84	13.8	18.2	24.6	43.3	135	309	433	493	520	530	529	519
-30	0.12	0.17	1.62	2.93	4.92	7.48	10.9	15.4	20.9	32.6	101	291	453	534	567	582	588	589	582
-25	0.12	0.18	1.72	3.20	5.28	7.97	11.9	16.7	23.8	51.4	204	421	542	592	614	627	635	640	638
-20	0.12	0.18	1.79	3.41	5.54	8.41	13.0	18.0	27.6	91.0	313	508	595	629	646	657	667	675	679
-15	0.12	0.19	1.84	3.52	5.69	8.76	13.7	19.2	32.9	141	396	565	629	655	668	675	684	693	700
-10	0.12	0.19	1.88	3.57	5.74	8.96	14.1	20.1	38.6	181	453	600	653	673	682	688	690	697	703
-5	0.12	0.18	1.89	3.58	5.70	9.00	14.2	20.6	42.4	208	486	622	669	685	692	697	699	694	699
0	0.12	0.18	1.88	3.55	5.60	8.88	14.0	20.5	42.2	210	498	634	680	694	700	705	710	713	714
5	0.12	0.18	1.89	3.59	5.70	8.98	14.1	20.6	41.4	203	482	618	666	683	692	699	704	702	699
10	0.12	0.18	1.87	3.59	5.74	8.92	14.0	20.1	36.7	172	445	592	646	669	680	689	695	701	703
15	0.12	0.17	1.83	3.54	5.69	8.71	13.6	19.2	30.9	127	383	552	618	647	663	673	685	692	696
20	0.12	0.17	1.77	3.43	5.55	8.36	12.8	18.0	26.3	75.6	294	491	578	615	635	651	663	671	673
25	0.12	0.16	1.68	3.23	5.31	7.94	11.7	16.6	23.7	45.5	179	399	517	570	597	616	627	634	633
30	0.12	0.15	1.57	2.95	4.97	7.48	10.7	15.2	20.9	29.5	76.7	259	426	505	546	567	578	581	576
35	0.12	0.14	1.43	2.72	4.61	6.88	9.70	13.5	18.0	24.5	36.4	96.7	269	405	470	503	518	521	516
40	0.12	0.13	1.21	2.47	4.27	6.25	8.72	11.6	15.6	20.3	26.1	37.4	83.0	213	337	405	436	449	450
45	0.12	0.13	0.95	2.22	3.78	5.54	7.74	10.2	13.0	16.6	21.0	26.2	31.9	52.2	99.3	180	263	312	336
50	0.12	0.13	0.63	1.93	3.10	4.82	6.64	8.83	11.0	13.4	16.5	20.0	24.1	27.0	30.4	37.7	48.2	57.1	61.0
55	0.12	0.13	0.35	1.56	2.57	4.07	5.57	7.32	9.35	11.2	13.1	15.2	17.6	20.0	22.6	25.0	26.5	27.3	27.7
60	0.12	0.13	0.18	1.11	2.13	3.03	4.56	5.91	7.44	9.22	10.8	12.1	13.3	14.8	16.2	17.5	18.6	19.4	19.8
65	0.12	0.13	0.14	0.54	1.50	2.38	3.17	4.54	5.74	6.99	8.11	9.12	10.1	11.1	12.0	12.8	13.4	13.9	14.2
70	0.12	0.12	0.13	0.19	0.74	1.52	2.31	2.94	3.79	4.97	5.84	6.39	7.05	7.57	7.95	8.26	8.48	8.58	8.58
75	0.12	0.12	0.13	0.14	0.19	0.50	1.08	1.66	2.30	2.89	3.28	3.74	4.39	4.83	5.14	5.32	5.42	5.45	5.42
80	0.12	0.12	0.12	0.13	0.13	0.15	0.17	0.28	0.51	0.82	1.16	1.48	1.79	2.09	2.38	2.63	2.83	2.96	3.04
85	0.12	0.12	0.12	0.12	0.13	0.13	0.13	0.14	0.14	0.14	0.14	0.14	0.15	0.15	0.16	0.16	0.16	0.16	0.16
90	0.12	0.12	0.12	0.12	0.12	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1191.17x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:荣星透镜3CCT-4000K-10AH-高亮	DIM.: 0.250*0.215	SERIAL No.:
MFR.: EVERFINE	SUR.:0.200*0.145	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.61	0.59	0.58	0.57	0.56	0.55	0.54	0.53	0.51
-85	0.63	0.68	0.73	0.76	0.77	0.76	0.72	0.69	0.65	0.59	0.54	0.53	0.52	0.52	0.52	0.52	0.52	0.51
-80	3.34	3.25	3.14	3.01	2.86	2.69	2.51	2.27	2.00	1.70	1.39	1.06	0.79	0.60	0.51	0.50	0.51	0.51
-75	5.75	5.73	5.65	5.52	5.34	5.06	4.61	4.01	3.40	2.91	2.52	2.03	1.54	1.06	0.68	0.51	0.50	0.51
-70	9.33	9.14	8.82	8.44	8.00	7.52	6.94	6.26	5.64	4.70	3.64	2.83	2.30	1.66	1.04	0.59	0.50	0.51
-65	14.8	14.2	13.5	12.6	11.6	10.6	9.63	8.69	7.50	6.33	5.21	4.06	2.91	2.22	1.46	0.76	0.49	0.51
-60	20.5	19.6	18.5	17.1	15.5	13.9	12.4	11.0	9.60	8.09	6.56	5.18	3.90	2.67	1.86	0.99	0.50	0.51
-55	28.0	26.8	25.3	23.3	20.7	18.2	15.9	13.5	11.5	9.75	8.03	6.28	4.74	3.26	2.20	1.23	0.50	0.51
-50	86.4	70.2	52.1	37.3	27.5	23.1	20.2	17.0	14.0	11.5	9.37	7.40	5.55	3.96	2.49	1.46	0.54	0.51
-45	353	324	265	175	86.5	44.1	25.3	20.8	17.0	13.6	10.8	8.45	6.31	4.47	2.80	1.67	0.61	0.51
-40	461	458	439	400	312	170	61.5	26.6	20.2	16.0	12.4	9.45	7.08	4.95	3.16	1.86	0.66	0.51
-35	527	528	520	500	459	371	196	60.2	24.2	18.5	14.1	10.5	7.74	5.45	3.53	2.01	0.72	0.51
-30	588	586	578	562	535	483	363	158	41.0	20.7	15.6	11.6	8.34	5.84	3.82	2.12	0.78	0.51
-25	640	635	624	609	587	550	469	289	79.5	24.2	17.2	12.6	8.89	6.16	3.99	2.22	0.84	0.51
-20	677	669	658	644	626	596	538	394	151	32.7	18.6	13.4	9.36	6.45	4.13	2.31	0.88	0.51
-15	697	690	679	668	654	631	582	466	223	47.7	19.7	14.0	9.73	6.64	4.25	2.38	0.92	0.51
-10	703	698	693	684	673	655	614	516	279	63.6	20.5	14.4	10.0	6.73	4.32	2.43	0.94	0.51
-5	703	704	700	693	686	672	636	545	314	73.2	20.9	14.6	10.2	6.73	4.34	2.45	0.96	0.51
0	712	709	704	699	695	685	650	559	323	75.4	20.9	14.5	10.1	6.66	4.31	2.45	0.96	0.51
5	694	698	696	691	685	672	636	542	306	70.8	21.1	14.5	10.1	6.71	4.32	2.44	0.95	0.51
10	696	688	685	680	672	655	614	509	262	59.5	20.7	14.4	9.99	6.67	4.28	2.41	0.93	0.51
15	690	681	671	665	653	631	580	451	196	43.4	20.0	14.0	9.68	6.56	4.19	2.35	0.90	0.51
20	670	663	653	642	626	598	527	364	122	30.4	18.8	13.4	9.28	6.35	4.04	2.27	0.86	0.51
25	634	630	621	608	589	544	443	241	66.1	24.3	17.2	12.5	8.79	6.04	3.88	2.17	0.81	0.51
30	583	583	576	563	527	454	308	111	34.5	21.4	15.6	11.5	8.20	5.70	3.66	2.05	0.75	0.51
35	525	526	516	486	425	302	130	45.1	24.6	18.5	14.0	10.4	7.52	5.26	3.36	1.91	0.68	0.51
40	453	444	417	356	240	104	42.8	26.2	20.7	15.8	12.3	9.26	6.82	4.78	2.99	1.74	0.62	0.51
45	317	273	196	113	59.5	33.6	25.9	21.4	16.9	13.5	10.6	8.16	6.07	4.24	2.65	1.55	0.57	0.51
50	58.5	50.1	39.1	31.1	26.9	24.0	20.1	16.7	13.9	11.3	9.06	7.04	5.23	3.65	2.36	1.32	0.51	0.51
55	27.2	26.4	25.0	22.7	20.1	17.8	15.5	13.3	11.3	9.38	7.57	5.91	4.41	2.97	2.01	1.08	0.47	0.51
60	19.4	18.6	17.6	16.4	14.9	13.4	12.0	10.5	9.07	7.54	6.11	4.80	3.45	2.47	1.63	0.83	0.46	0.51
65	13.9	13.4	12.8	11.9	10.9	9.91	8.93	8.00	6.94	5.73	4.70	3.50	2.63	1.91	1.21	0.64	0.45	0.51
70	8.56	8.44	8.21	7.89	7.49	6.97	6.24	5.68	4.95	3.93	3.07	2.51	1.89	1.33	0.79	0.49	0.45	0.51
75	5.43	5.39	5.28	5.11	4.82	4.39	3.77	3.25	2.81	2.45	1.98	1.51	1.10	0.71	0.50	0.42	0.45	0.51
80	2.96	2.82	2.65	2.45	2.25	1.97	1.66	1.43	1.26	0.99	0.74	0.53	0.44	0.39	0.38	0.41	0.46	0.51
85	0.18	0.19	0.20	0.21	0.20	0.19	0.17	0.16	0.15	0.19	0.22	0.26	0.29	0.33	0.37	0.42	0.46	0.51
90	0.13	0.13	0.13	0.13	0.13	0.13	0.14	0.14	0.14	0.18	0.22	0.26	0.30	0.35	0.39	0.43	0.47	0.51

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	700.8	700.8	700.8	700.8	700.8	700.8	700.8	700.8
3.0	700.1	701.3	701.9	701.4	700.9	701.6	702.5	701.1
6.0	698.7	702.4	704.8	702.0	699.7	702.6	705.8	701.7
9.0	696.6	702.8	708.0	701.6	697.6	702.2	708.0	701.0
12.0	694.0	701.4	709.2	699.8	695.1	699.1	707.0	698.2
15.0	691.3	697.0	705.5	695.9	692.2	693.2	701.2	693.4
18.0	688.4	689.5	695.3	690.1	689.1	684.7	689.1	687.0
21.0	685.5	679.0	677.7	681.9	685.9	673.4	671.4	678.6
24.0	682.9	665.5	652.3	671.2	682.6	659.1	646.7	667.6
27.0	679.5	648.7	621.8	657.4	677.8	640.9	615.1	653.0
30.0	672.5	627.5	586.2	638.8	668.0	616.7	580.5	632.6
33.0	656.8	601.3	548.6	614.2	647.1	586.8	544.5	608.2
36.0	626.8	568.7	510.9	580.9	606.7	548.6	507.3	576.7
39.0	573.9	527.3	472.7	527.8	528.5	491.7	469.3	519.9
42.0	475.9	465.8	428.6	441.9	385.8	405.9	424.2	432.9
45.0	316.9	363.6	364.1	302.5	205.9	259.0	338.9	295.3
48.0	146.3	192.8	199.2	137.1	76.79	92.12	148.0	120.1
51.0	55.80	64.23	61.87	48.65	32.29	38.56	47.17	43.83
54.0	23.45	27.46	31.85	28.14	21.69	26.97	28.78	27.17
57.0	17.88	21.31	27.06	22.44	16.74	21.91	25.04	22.41
60.0	14.20	17.66	21.28	18.01	13.76	17.35	19.99	17.73
63.0	11.65	14.40	17.71	14.79	10.65	13.92	16.44	14.38
66.0	9.065	11.95	14.33	12.18	7.930	11.73	13.46	11.75
69.0	7.112	10.03	11.09	9.875	6.030	9.788	9.601	9.581
72.0	5.563	8.029	7.926	7.490	4.648	7.541	7.577	7.496
75.0	4.231	6.171	5.770	5.533	3.483	5.776	5.465	5.677
78.0	3.127	4.427	4.576	3.453	2.392	3.447	3.945	3.542
81.0	2.095	2.852	2.853	2.394	1.606	1.968	2.153	2.298
84.0	1.251	1.582	0.7144	1.090	0.4406	0.2896	0.2319	0.7320
87.0	0.4910	0.5538	0.5317	0.5258	0.1251	0.1395	0.1324	0.1412
90.0	0.5045	0.6176	0.6220	0.6162	0.1134	0.1335	0.1304	0.1389

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks: