

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		594.8 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		-6.0 degrees horizontal
Beam Spread	At 10% of Imax	98.2V x 98.6H
	At 50% of Imax	86.2V x 87.0H
	At 90% of Imax	51.5V x 70.7H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	960.2 lumens per klm.
	To 50% of Imax	885.4 lumens per klm.
	To 90% of Imax	457.6 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1225.78x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:荣星透镜3CCT-6500K-10AH-高亮	DIM.: 0.250*0.215	SERIAL No.:
MFR.: EVERFINE	SUR.:0.200*0.145	Shielding Angle:

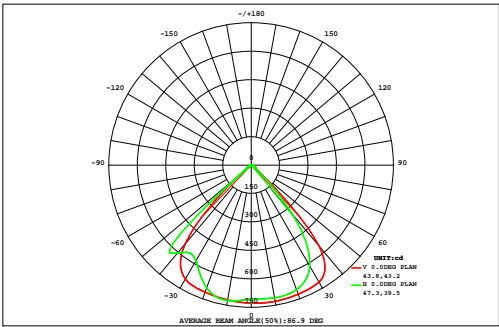

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL	--	Imax(cd)	729.1
NOMINAL POWER(W)		AVAILABILITY(%)	96.0
RATED VOLTAGE(V)		Avai. FLUX(lm)	1177
NOMINAL FLUX(lm)	1225.78	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1226
TEST VOLTAGE(V)	--	θ @50%(H,V)	87,86DEG

		AREA FLUX DIAGRAM														UNIT:lm				Φ t	Φ a
VERTICAL(DEG)	90	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.25	0.00
	80	0.00	0.00	0.01	0.05	0.10	0.15	0.20	0.24	0.27	0.26	0.23	0.19	0.14	0.09	0.05	0.02	0.00	0.00	2.02	0.00
	70	0.00	0.01	0.04	0.11	0.20	0.30	0.40	0.49	0.55	0.55	0.47	0.38	0.28	0.18	0.10	0.04	0.01	0.00	4.11	0.00
	60	0.00	0.02	0.07	0.16	0.31	0.49	0.72	0.97	1.22	1.22	0.95	0.70	0.47	0.28	0.15	0.07	0.02	0.00	7.82	0.29
	50	0.00	0.02	0.09	0.22	0.45	0.91	3.62	9.67	13.6	13.6	9.64	3.69	0.88	0.43	0.21	0.09	0.03	0.00	57.2	52.5
	40	0.00	0.03	0.11	0.29	0.71	5.29	15.3	18.0	17.8	17.8	14.9	5.45	0.70	0.27	0.11	0.03	0.00	115	112	
	30	0.00	0.03	0.13	0.36	2.09	12.7	17.6	18.7	19.4	19.3	18.6	17.4	12.6	2.37	0.33	0.12	0.03	0.00	142	140
		0.00	0.03	0.14	0.41	4.62	15.3	18.5	20.2	21.5	21.3	19.9	18.3	15.0	5.15	0.39	0.14	0.04	0.00	161	159
		0.00	0.03	0.14	0.45	5.88	16.3	19.5	21.1	21.9	21.6	20.7	19.1	15.8	6.53	0.47	0.14	0.04	0.00	170	168
		0.00	0.03	0.14	0.44	5.39	16.0	19.6	21.1	21.6	21.6	21.0	19.3	15.4	6.06	0.45	0.14	0.04	0.00	168	167
		0.00	0.03	0.13	0.38	3.48	13.7	18.8	20.7	21.4	21.4	20.6	18.3	13.3	4.06	0.35	0.13	0.04	0.00	157	155
		0.00	0.03	0.12	0.31	1.43	8.58	15.9	19.1	20.3	20.2	18.8	15.3	8.67	1.68	0.28	0.11	0.03	0.00	131	129
	-30	0.00	0.02	0.10	0.25	0.57	2.64	8.34	13.3	15.1	15.0	13.0	8.28	2.85	0.52	0.23	0.10	0.03	0.00	80.4	77.6
	-40	0.00	0.02	0.07	0.19	0.35	0.66	1.61	3.46	4.78	4.80	3.53	1.62	0.57	0.32	0.17	0.08	0.02	0.00	22.3	16.4
	-50	0.00	0.01	0.05	0.13	0.24	0.37	0.48	0.60	0.68	0.66	0.56	0.44	0.33	0.22	0.13	0.05	0.02	0.00	4.96	0.00
	-60	0.00	0.01	0.03	0.07	0.14	0.21	0.27	0.32	0.34	0.34	0.31	0.25	0.20	0.14	0.08	0.03	0.01	0.00	2.73	0.00
	-70	0.00	0.00	0.01	0.03	0.05	0.07	0.09	0.10	0.10	0.10	0.11	0.10	0.08	0.05	0.03	0.02	0.01	0.00	0.94	0.00
	-80	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.26	0.00
	-90	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.26	0.00
		-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)				20	30	40	50	60	70	80	90
Φ t	0.02	0.35	1.39	3.84	26.0	93.8	141	168	181	180	166	138	92.0	28.8	3.71	1.39	0.39	0.05	1226	---	
Φ a	0.00	0.00	0.00	0.00	20.9	89.8	137	165	177	176	163	135	88.5	24.5	0.00	0.00	0.00	0.00	---	1177	


one-half-peak spread: U:27.5,D:4.8 , L:37.3,R:49.9 NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1225.78x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-6500K-10AH-高亮	DIM.: 0.250*0.215	SERIAL No.:
MFR.: EVERFINE	SUR.:0.200*0.145	Shielding Angle:

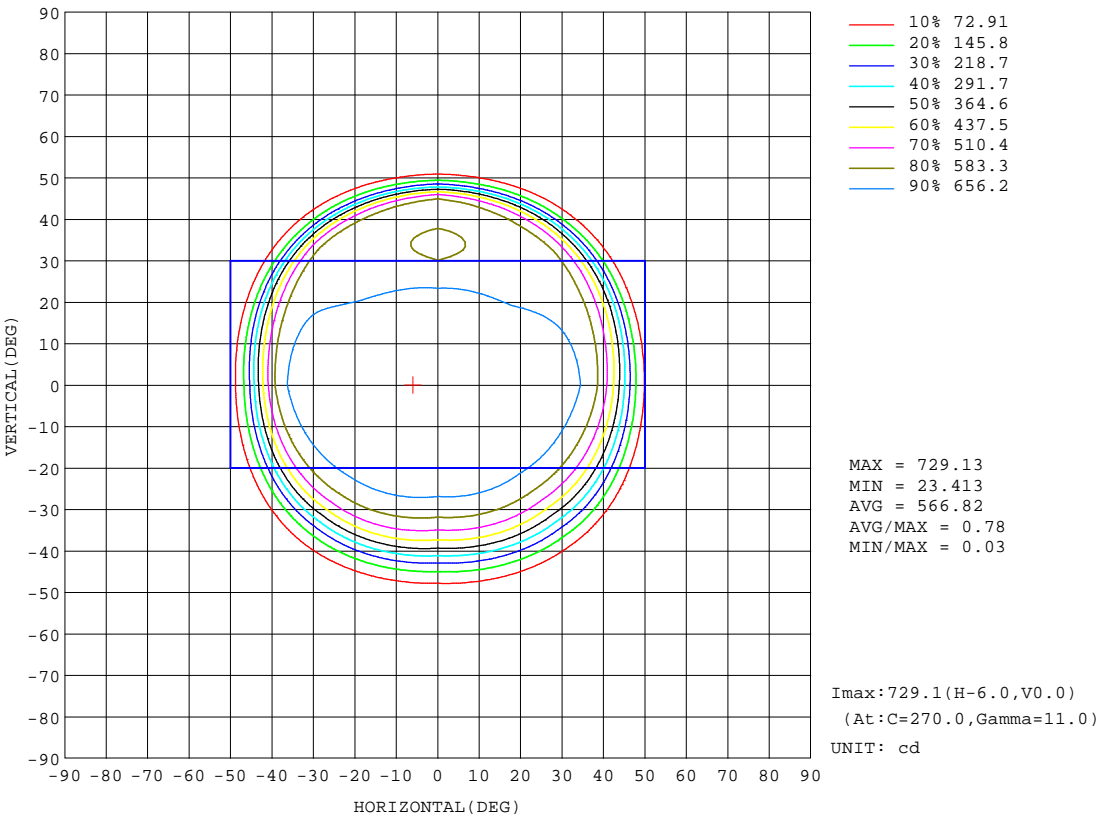


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1225.78x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-6500K-10AH-高亮	DIM.: 0.250*0.215	SERIAL No.:
MFR.: EVERFINE	SUR.:0.200*0.145	Shielding Angle:

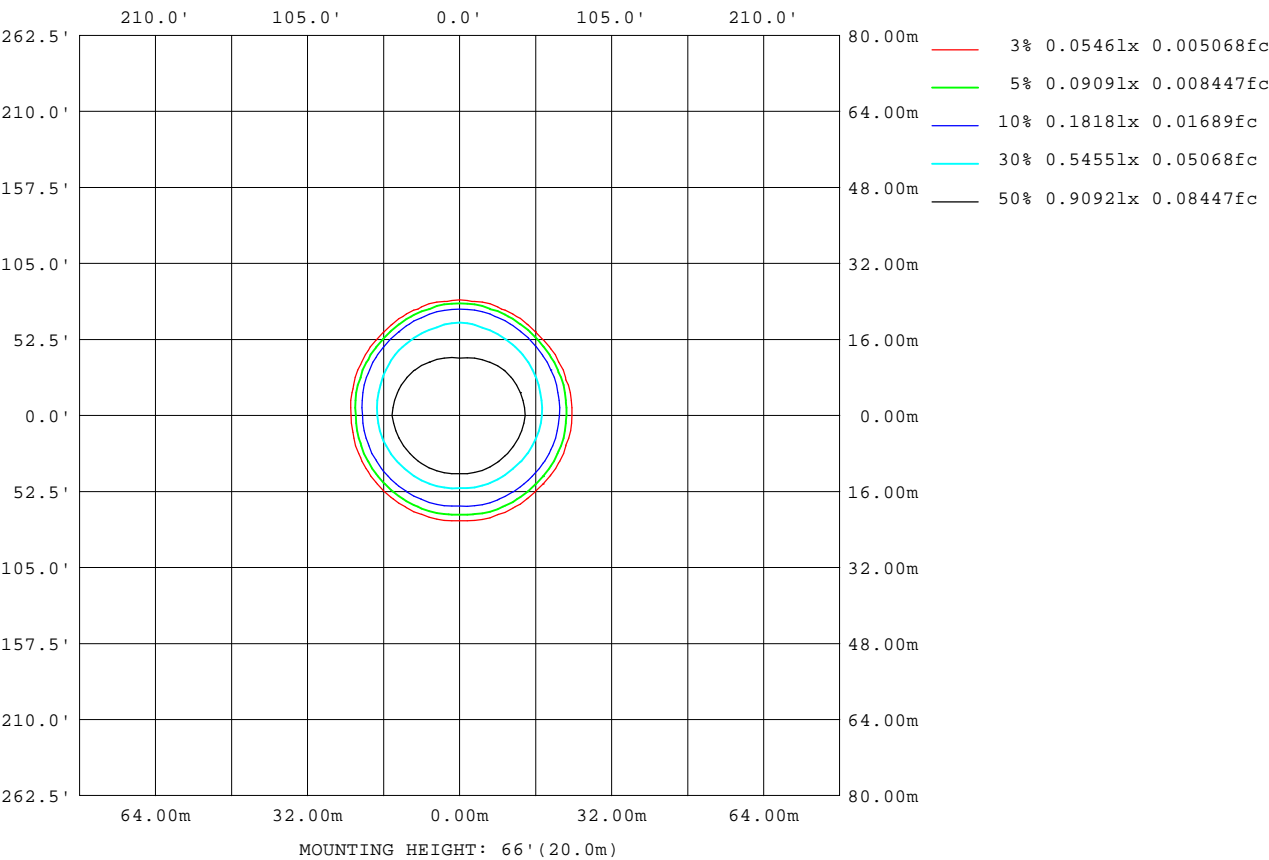

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

Planar Illuminance Curve

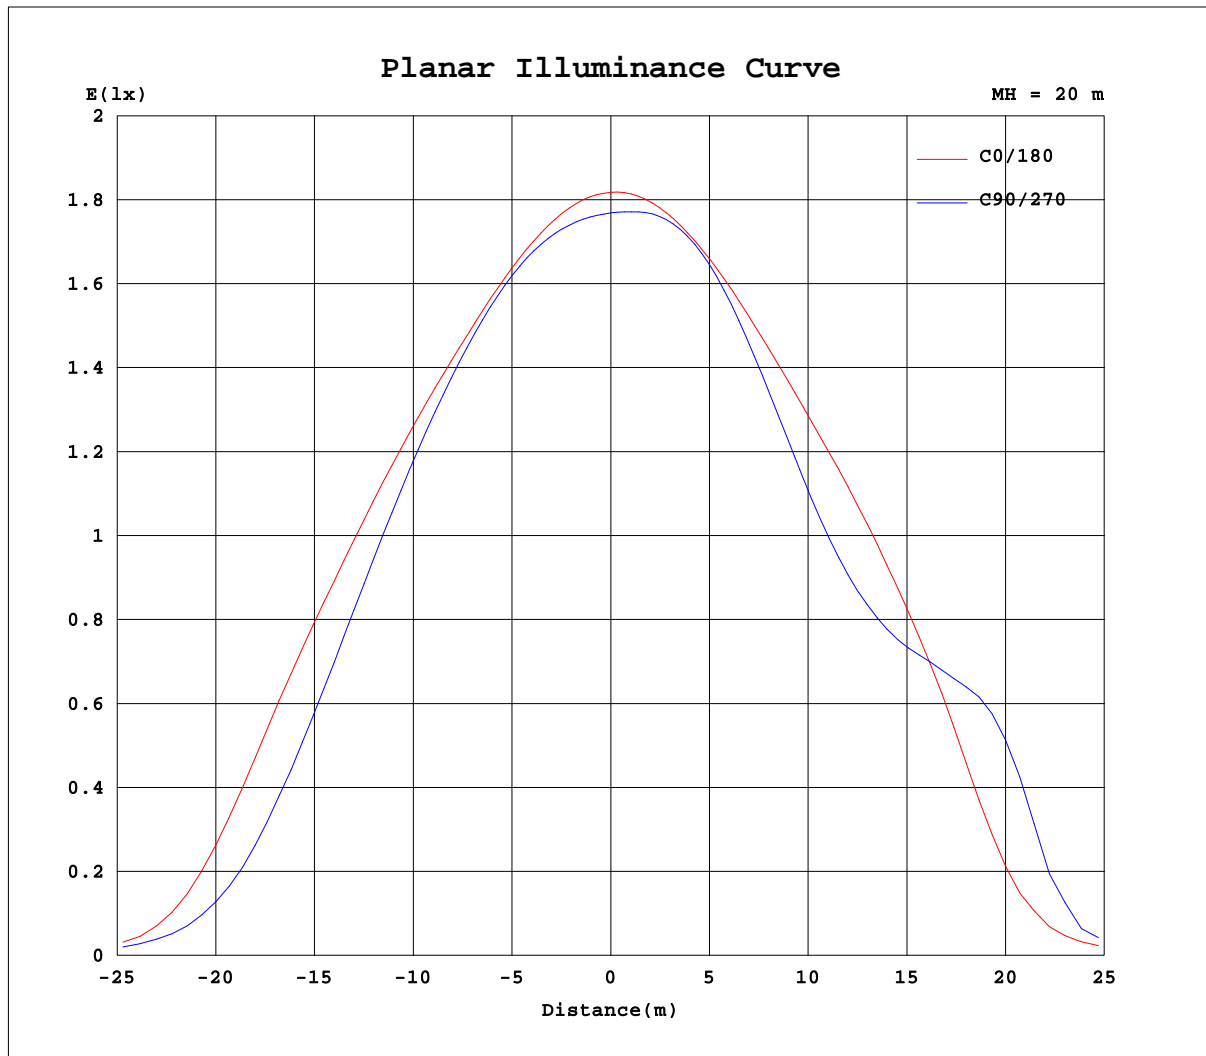


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

AAI Figure

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1225.78x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-6500K-10AH-高亮	DIM.: 0.250*0.215	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.200*0.145	Shielding Angle:

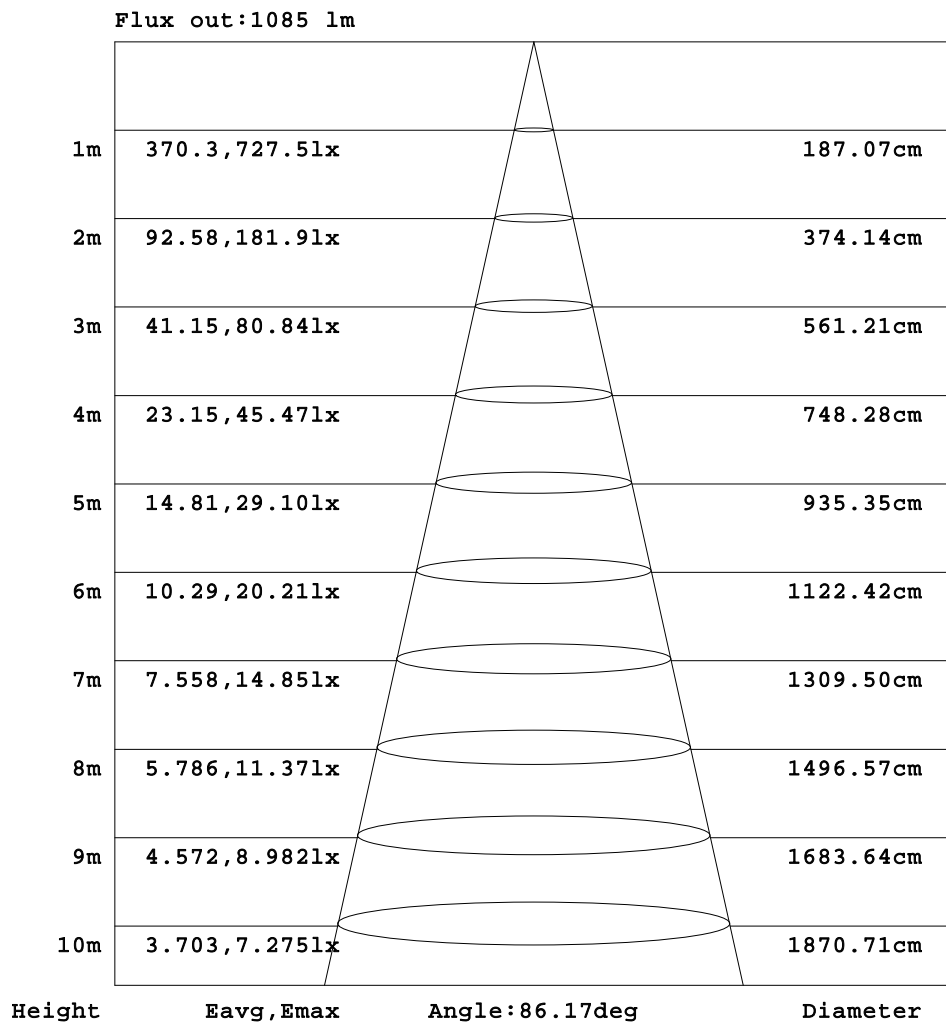

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1225.78x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-6500K-10AH-高亮	DIM.: 0.250*0.215	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.200*0.145	Shielding Angle:

Table--1																	UNIT: cd		
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.14	0.20	0.26	0.32	0.39	0.45	0.51	0.58	0.64	0.70	0.71	0.72	0.72	0.73	0.74	0.75	0.76	0.76	0.77
-85	0.14	0.19	0.25	0.30	0.35	0.40	0.45	0.49	0.54	0.60	0.60	0.61	0.63	0.64	0.64	0.65	0.65	0.65	0.65
-80	0.14	0.19	0.24	0.29	0.34	0.41	0.51	0.69	0.89	1.05	1.17	1.30	1.43	1.53	1.58	1.63	1.65	1.65	1.64
-75	0.14	0.19	0.23	0.29	0.42	0.78	1.18	1.52	1.80	2.00	2.24	2.54	2.81	3.15	3.33	3.38	3.33	3.22	3.06
-70	0.14	0.18	0.24	0.37	0.93	1.50	1.92	2.29	2.84	3.90	4.63	5.05	5.54	5.80	5.93	5.95	5.88	5.69	5.40
-65	0.14	0.18	0.25	0.73	1.53	2.06	2.67	3.85	4.90	6.26	7.39	8.10	8.97	9.86	10.7	11.3	11.7	12.0	12.0
-60	0.14	0.18	0.29	1.22	1.97	2.69	4.07	5.41	7.10	8.68	10.3	11.6	12.8	13.7	14.3	14.7	15.0	15.0	14.9
-55	0.14	0.18	0.49	1.63	2.40	3.76	5.27	7.18	9.07	11.2	13.2	14.7	15.9	17.0	18.1	19.2	20.0	20.2	20.0
-50	0.14	0.18	0.76	1.93	2.91	4.62	6.66	8.77	11.2	13.8	15.9	17.9	20.5	23.5	27.7	32.7	37.7	41.8	42.6
-45	0.14	0.18	1.07	2.20	3.70	5.58	7.84	10.5	13.5	16.3	19.1	24.0	31.9	45.7	69.7	98.8	127	143	145
-40	0.14	0.18	1.34	2.49	4.27	6.49	9.05	12.3	15.7	19.1	25.2	39.0	71.2	134	207	274	319	341	339
-35	0.14	0.18	1.55	2.77	4.74	7.22	10.3	14.3	17.9	23.8	38.7	85.1	184	305	404	467	501	514	509
-30	0.14	0.19	1.70	3.03	5.25	7.94	11.6	15.9	20.7	31.6	74.7	198	357	476	551	591	612	620	616
-25	0.14	0.20	1.82	3.39	5.73	8.59	12.9	17.4	24.2	47.6	154	353	505	589	634	658	670	674	672
-20	0.14	0.20	1.92	3.67	6.06	9.20	14.1	18.8	28.4	78.9	267	484	598	652	678	691	697	699	698
-15	0.14	0.20	1.99	3.83	6.28	9.71	14.9	20.3	34.5	128	380	570	652	685	700	705	708	709	709
-10	0.14	0.21	2.04	3.94	6.41	10.0	15.5	21.6	41.7	178	467	623	682	703	711	713	709	709	710
-5	0.14	0.20	2.08	4.00	6.45	10.2	15.8	22.4	47.6	221	523	656	701	713	718	720	717	706	707
0	0.14	0.20	2.09	4.00	6.41	10.2	15.9	22.7	49.7	241	554	676	713	721	724	727	729	729	727
5	0.14	0.20	2.13	4.10	6.57	10.4	16.1	23.1	49.8	249	553	666	698	707	713	719	723	721	716
10	0.14	0.20	2.14	4.14	6.65	10.4	16.0	23.0	45.3	225	535	651	682	692	699	707	713	722	724
15	0.14	0.19	2.13	4.14	6.62	10.2	15.7	22.3	37.6	175	491	633	663	673	680	687	701	712	718
20	0.14	0.18	2.09	4.09	6.49	9.88	15.1	21.2	30.8	107	414	606	647	652	657	665	676	685	688
25	0.14	0.18	2.02	3.92	6.26	9.44	14.0	19.6	27.7	60.1	276	552	634	638	633	634	638	641	638
30	0.14	0.17	1.90	3.68	5.92	8.95	12.8	17.9	25.4	36.0	119	414	602	637	623	610	602	595	584
35	0.14	0.15	1.75	3.40	5.59	8.29	11.7	16.2	21.8	29.5	51.2	163	456	604	626	614	596	580	566
40	0.14	0.15	1.50	3.12	5.24	7.49	10.6	14.2	18.6	25.2	31.6	54.5	143	376	553	610	617	611	605
45	0.14	0.14	1.18	2.86	4.87	6.74	9.50	12.5	16.0	20.1	26.6	32.6	41.1	77.1	177	335	469	543	581
50	0.14	0.14	0.81	2.54	4.16	6.07	8.10	10.9	13.7	16.8	20.2	25.2	31.3	34.1	39.4	53.3	72.7	88.9	96.9
55	0.14	0.13	0.47	2.11	3.47	5.45	7.01	9.04	11.7	14.1	16.5	19.1	22.0	25.7	29.9	33.4	35.1	35.8	36.3
60	0.14	0.13	0.20	1.51	2.97	4.25	6.13	7.56	9.27	11.7	13.8	15.3	16.9	18.9	20.8	22.5	24.1	25.4	26.3
65	0.14	0.13	0.16	0.78	2.18	3.45	4.63	6.46	7.66	8.95	10.3	12.0	13.3	14.4	15.5	16.3	17.0	17.6	18.0
70	0.14	0.13	0.14	0.24	1.12	2.35	3.55	4.44	5.91	7.39	8.10	8.82	9.69	10.4	11.1	11.7	12.3	12.6	12.8
75	0.14	0.13	0.13	0.15	0.24	0.88	1.82	2.84	3.87	4.71	5.28	6.07	7.07	7.56	7.89	8.10	8.27	8.39	8.47
80	0.14	0.13	0.13	0.13	0.14	0.16	0.21	0.60	1.12	1.72	2.34	2.89	3.32	3.71	4.15	4.54	4.87	5.10	5.24
85	0.14	0.13	0.13	0.13	0.13	0.13	0.13	0.14	0.14	0.15	0.15	0.16	0.17	0.18	0.19	0.19	0.19	0.19	0.19
90	0.14	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1225.78x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-6500K-10AH-高亮	DIM.: 0.250*0.215	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.200*0.145	Shielding Angle:

Table--2																	UNIT: cd		
H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.77	0.76	0.75	0.75	0.74	0.74	0.73	0.73	0.72	0.70	0.68	0.66	0.64	0.62	0.60	0.58	0.56	0.54	
-85	0.66	0.67	0.67	0.68	0.67	0.66	0.65	0.64	0.63	0.62	0.60	0.60	0.58	0.58	0.57	0.56	0.55	0.54	
-80	1.67	1.67	1.67	1.64	1.60	1.53	1.44	1.32	1.17	1.06	0.94	0.80	0.68	0.60	0.56	0.55	0.54	0.54	
-75	3.26	3.42	3.54	3.60	3.53	3.31	2.93	2.56	2.21	1.94	1.71	1.44	1.14	0.86	0.63	0.54	0.54	0.54	
-70	5.67	5.84	5.92	5.95	5.93	5.81	5.50	4.98	4.50	3.46	2.63	2.12	1.74	1.31	0.88	0.58	0.53	0.54	
-65	11.8	11.4	10.8	10.1	9.31	8.52	7.84	7.41	6.61	5.41	4.37	3.13	2.31	1.79	1.22	0.69	0.53	0.54	
-60	14.8	14.5	14.1	13.4	12.5	11.5	10.4	9.37	8.33	7.20	5.87	4.48	3.15	2.23	1.58	0.87	0.53	0.54	
-55	19.7	19.1	18.1	16.9	15.7	14.6	13.1	11.4	10.0	8.64	7.25	5.73	4.21	2.74	1.90	1.08	0.53	0.54	
-50	41.3	36.4	30.2	24.4	20.4	18.2	16.0	14.3	12.1	10.2	8.47	6.83	5.07	3.45	2.20	1.30	0.55	0.54	
-45	145	131	105	72.4	43.3	26.7	19.8	17.0	14.6	12.1	9.79	7.78	5.95	4.11	2.51	1.52	0.59	0.54	
-40	338	316	274	213	142	75.0	34.5	20.9	17.1	14.2	11.3	8.79	6.68	4.61	2.85	1.71	0.62	0.54	
-35	509	493	456	393	304	196	97.4	37.5	20.1	16.0	12.9	9.82	7.32	5.19	3.23	1.87	0.66	0.54	
-30	616	605	579	533	457	352	219	90.2	29.5	18.3	14.4	10.9	7.97	5.65	3.57	1.99	0.72	0.54	
-25	672	665	649	618	567	486	356	186	55.1	20.9	15.6	11.9	8.57	6.02	3.83	2.10	0.77	0.54	
-20	698	694	685	666	634	575	469	295	105	26.8	17.0	12.9	9.11	6.32	4.02	2.21	0.82	0.54	
-15	709	707	702	691	671	629	548	391	168	38.7	18.3	13.5	9.56	6.53	4.16	2.31	0.85	0.54	
-10	711	711	710	704	691	662	599	464	228	53.2	19.1	14.0	9.94	6.67	4.26	2.38	0.88	0.54	
-5	711	715	714	709	701	682	630	513	274	63.9	19.6	14.3	10.2	6.73	4.31	2.43	0.89	0.54	
0	725	721	717	712	708	694	650	542	298	69.0	19.8	14.4	10.2	6.71	4.31	2.45	0.90	0.54	
5	707	710	706	701	696	682	644	542	300	66.6	20.4	14.7	10.4	6.82	4.37	2.47	0.89	0.54	
10	712	696	693	688	681	666	633	527	274	58.0	20.7	14.7	10.3	6.84	4.39	2.46	0.87	0.54	
15	705	689	676	671	663	650	616	493	215	43.3	20.5	14.5	10.1	6.78	4.35	2.42	0.84	0.54	
20	681	669	658	650	645	637	588	427	136	30.7	19.7	14.1	9.75	6.61	4.27	2.36	0.80	0.54	
25	639	635	630	630	635	620	539	304	70.2	25.2	18.3	13.3	9.31	6.35	4.16	2.27	0.76	0.54	
30	594	600	608	621	625	580	417	140	36.7	23.4	16.8	12.3	8.76	6.04	3.98	2.16	0.70	0.54	
35	580	595	609	611	582	445	182	54.5	26.8	20.6	15.3	11.2	8.10	5.66	3.67	2.01	0.63	0.54	
40	607	608	597	540	379	153	55.6	29.2	23.9	17.7	13.4	10.1	7.39	5.23	3.31	1.84	0.59	0.54	
45	542	470	341	184	78.7	40.1	29.9	25.4	19.3	15.0	11.8	9.02	6.64	4.82	2.99	1.65	0.55	0.54	
50	89.2	73.0	53.2	38.5	32.3	29.6	24.3	19.5	15.7	12.8	10.2	7.83	5.90	4.28	2.69	1.38	0.51	0.54	
55	35.4	34.4	32.6	29.3	25.2	21.5	18.3	15.4	13.0	10.8	8.58	6.71	5.23	3.52	2.29	1.09	0.48	0.54	
60	25.4	24.0	22.2	20.3	18.1	16.0	14.2	12.4	10.6	8.70	7.08	5.77	4.27	2.99	1.84	0.81	0.48	0.54	
65	17.4	16.7	15.9	14.8	13.6	12.3	11.0	9.59	8.20	6.98	5.95	4.53	3.34	2.29	1.32	0.60	0.48	0.54	
70	12.5	12.0	11.4	10.7	9.95	9.11	8.08	7.32	6.62	5.49	4.19	3.36	2.39	1.57	0.79	0.48	0.48	0.54	
75	8.30	8.08	7.82	7.51	7.12	6.62	5.72	4.88	4.20	3.60	2.78	2.00	1.33	0.74	0.47	0.44	0.48	0.54	
80	5.04	4.75	4.41	4.03	3.64	3.22	2.70	2.26	1.95	1.43	0.96	0.59	0.44	0.39	0.39	0.43	0.48	0.54	
85	0.22	0.24	0.25	0.26	0.25	0.23	0.18	0.16	0.16	0.19	0.22	0.27	0.31	0.35	0.39	0.44	0.49	0.54	
90	0.13	0.13	0.13	0.13	0.13	0.13	0.14	0.14	0.14	0.18	0.23	0.27	0.32	0.36	0.41	0.45	0.50	0.54	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	713.2	713.2	713.2	713.2	713.2	713.2	713.2	713.2
3.0	711.8	711.7	712.3	713.2	714.6	716.7	717.4	714.6
6.0	710.1	711.4	713.2	713.9	715.0	720.2	724.1	715.8
9.0	707.8	711.5	715.0	715.4	714.6	721.4	729.3	714.3
12.0	705.4	711.6	715.9	717.1	713.9	718.3	730.2	709.4
15.0	702.8	710.9	714.5	717.7	712.8	710.7	723.9	701.9
18.0	700.2	708.4	709.5	717.1	711.2	699.7	708.7	692.9
21.0	697.8	702.4	700.2	713.4	709.3	686.8	685.0	683.1
24.0	695.1	691.3	684.4	705.4	707.3	673.1	654.0	672.2
27.0	690.6	673.0	660.0	691.1	704.7	659.1	619.2	659.9
30.0	680.5	643.6	621.2	666.3	699.0	644.8	588.4	647.5
33.0	659.0	599.1	563.4	625.4	683.8	635.9	571.5	640.8
36.0	623.3	531.2	484.0	559.8	648.7	637.2	573.4	642.2
39.0	561.3	434.7	380.5	457.3	580.2	638.5	600.7	629.1
42.0	450.7	313.9	258.7	319.7	438.0	602.7	628.9	584.4
45.0	292.6	187.8	146.4	177.2	236.1	443.2	585.6	438.6
48.0	135.6	85.93	69.80	80.63	90.02	160.5	262.4	176.7
51.0	51.17	34.55	33.58	40.43	37.73	57.66	70.00	58.97
54.0	21.87	20.76	21.61	25.87	23.97	33.20	37.95	31.11
57.0	17.22	17.18	17.57	19.65	18.79	28.06	34.71	27.15
60.0	14.15	14.66	15.02	16.62	15.56	21.21	26.55	20.83
63.0	11.73	12.06	13.47	14.15	12.21	17.61	21.33	16.62
66.0	9.171	10.18	11.21	11.65	9.103	14.84	17.18	13.72
69.0	7.163	8.591	7.085	9.185	6.891	12.54	14.03	11.34
72.0	5.621	7.067	4.284	6.914	5.323	9.559	11.63	8.862
75.0	4.230	4.974	3.087	4.702	3.926	7.968	8.540	7.224
78.0	3.098	2.901	2.240	2.520	2.676	5.522	6.831	5.208
81.0	2.072	1.751	1.374	1.645	1.793	3.619	3.708	3.566
84.0	1.192	0.9249	0.7103	0.8248	0.5040	0.8270	0.2582	1.116
87.0	0.5092	0.6277	0.6482	0.6007	0.1328	0.1357	0.1325	0.1413
90.0	0.5332	0.7212	0.7769	0.7093	0.1328	0.1275	0.1265	0.1411

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks: