

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	603.9 cd per klm.
(Luminaire orientation as tested.)	-12.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	100.6V x 99.5H
	At 50% of Imax	88.1V x 87.3H
	At 90% of Imax	44.0V x 46.3H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	962.2 lumens per klm.
	To 50% of Imax	876.6 lumens per klm.
	To 90% of Imax	288.9 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1613.76x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:荣星透镜3CCT-3000K-12AH-高亮	DIM.: 0.285*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.:0.160*0.135	Shielding Angle:

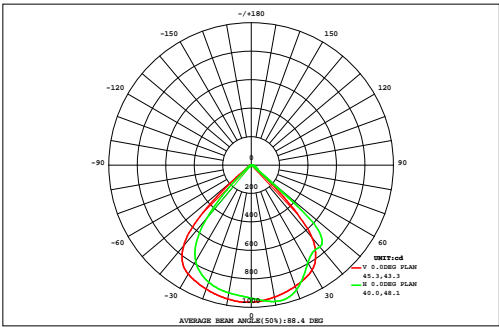

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL	--	Imax(cd)	974.6
NOMINAL POWER(W)		AVAILABILITY(%)	96.3
RATED VOLTAGE(V)		Avai. FLUX(lm)	1554
NOMINAL FLUX(lm)	1613.76	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1614
TEST VOLTAGE(V)	--	θ @50%(H,V)	87,88DEG

		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
		0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.15	0.00
VERTICAL (DEG)	90	0.00	0.00	0.01	0.03	0.05	0.08	0.11	0.12	0.12	0.12	0.12	0.10	0.08	0.05	0.03	0.02	0.01	0.00	1.05	0.00
	80	0.00	0.01	0.04	0.08	0.15	0.22	0.28	0.33	0.35	0.35	0.32	0.27	0.21	0.15	0.08	0.03	0.01	0.00	2.89	0.00
	70	0.00	0.02	0.06	0.15	0.25	0.38	0.57	0.78	0.94	0.95	0.79	0.57	0.38	0.24	0.14	0.06	0.02	0.00	6.29	0.00
	60	0.00	0.03	0.09	0.20	0.39	0.81	2.16	4.90	7.02	7.18	5.28	2.42	0.87	0.40	0.20	0.09	0.03	0.00	32.1	24.5
	50	0.00	0.03	0.11	0.27	0.72	3.52	10.9	17.3	19.9	20.0	17.7	11.8	4.40	0.88	0.28	0.11	0.03	0.00	108	104
	40	0.00	0.04	0.13	0.36	2.00	11.0	19.4	23.5	25.3	25.3	23.7	20.0	12.5	3.02	0.40	0.13	0.04	0.00	167	164
	30	0.00	0.04	0.14	0.47	4.87	16.6	22.7	25.8	27.1	27.1	25.9	23.2	17.8	6.85	0.61	0.15	0.04	0.00	199	197
	-30	0.00	0.04	0.15	0.57	7.31	19.0	24.0	26.8	28.1	28.0	27.1	24.6	20.1	9.79	0.87	0.16	0.04	0.01	217	215
		0.00	0.05	0.16	0.61	7.99	19.3	24.1	27.0	28.6	29.2	27.7	24.8	20.6	10.6	0.91	0.17	0.04	0.01	222	220
		0.00	0.05	0.16	0.54	6.67	18.3	23.2	26.1	28.5	28.9	26.9	24.0	19.7	8.93	0.69	0.16	0.04	0.01	213	211
		0.00	0.04	0.15	0.44	3.63	15.7	21.7	24.2	25.9	26.2	24.8	22.6	17.6	5.06	0.48	0.15	0.04	0.00	189	187
		0.00	0.04	0.13	0.34	1.13	8.48	18.7	22.2	23.1	23.3	22.9	20.2	10.3	1.41	0.36	0.13	0.04	0.00	153	150
0.00		0.03	0.11	0.26	0.56	1.52	6.49	13.7	18.0	18.4	14.7	7.49	1.75	0.58	0.26	0.11	0.03	0.00	84.0	78.9	
0.00		0.02	0.09	0.20	0.37	0.63	0.98	1.50	2.12	2.15	1.54	1.00	0.63	0.37	0.19	0.08	0.03	0.00	11.9	2.02	
0.00		0.01	0.06	0.13	0.23	0.36	0.50	0.64	0.74	0.74	0.63	0.49	0.35	0.23	0.13	0.06	0.02	0.00	5.31	0.00	
-70	0.00	0.00	0.03	0.07	0.12	0.18	0.24	0.29	0.33	0.33	0.29	0.23	0.18	0.12	0.07	0.03	0.01	0.00	2.51	0.00	
-80	0.00	0.00	0.01	0.01	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.54	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
		-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)				20	30	40	50	60	70	80	90
Φ t	0.04	0.47	1.63	4.74	36.5	116	176	215	236	238	220	184	128	48.6	5.70	1.65	0.48	0.06	1614	---	
Φ a	0.00	0.00	0.00	0.00	30.6	112	172	211	232	234	216	180	123	43.8	0.55	0.00	0.00	0.00	---	1554	


one-half-peak spread: U:8.1,D:40.1 , L:42.7,R:44.7 Beam Type: Type 5 x 6 (H x V)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1613.76x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-3000K-12AH-高亮	DIM.: 0.285*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.:0.160*0.135	Shielding Angle:

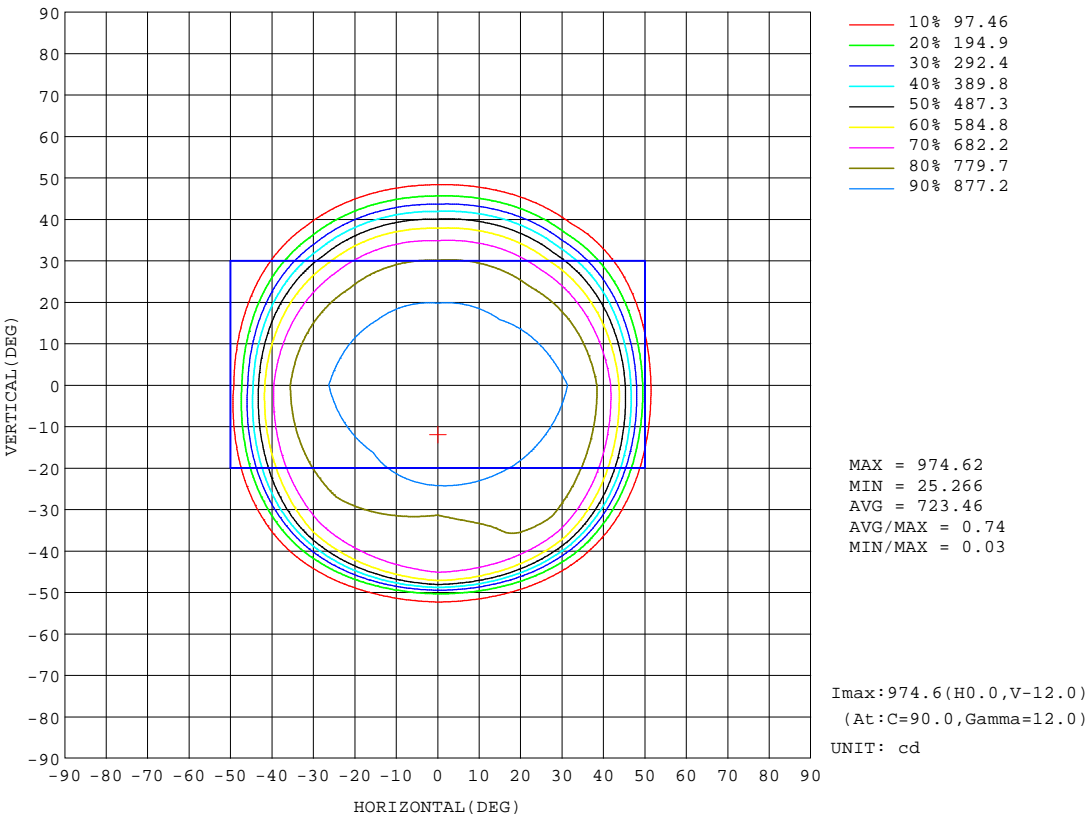


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1613.76x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-3000K-12AH-高亮	DIM.: 0.285*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.:0.160*0.135	Shielding Angle:

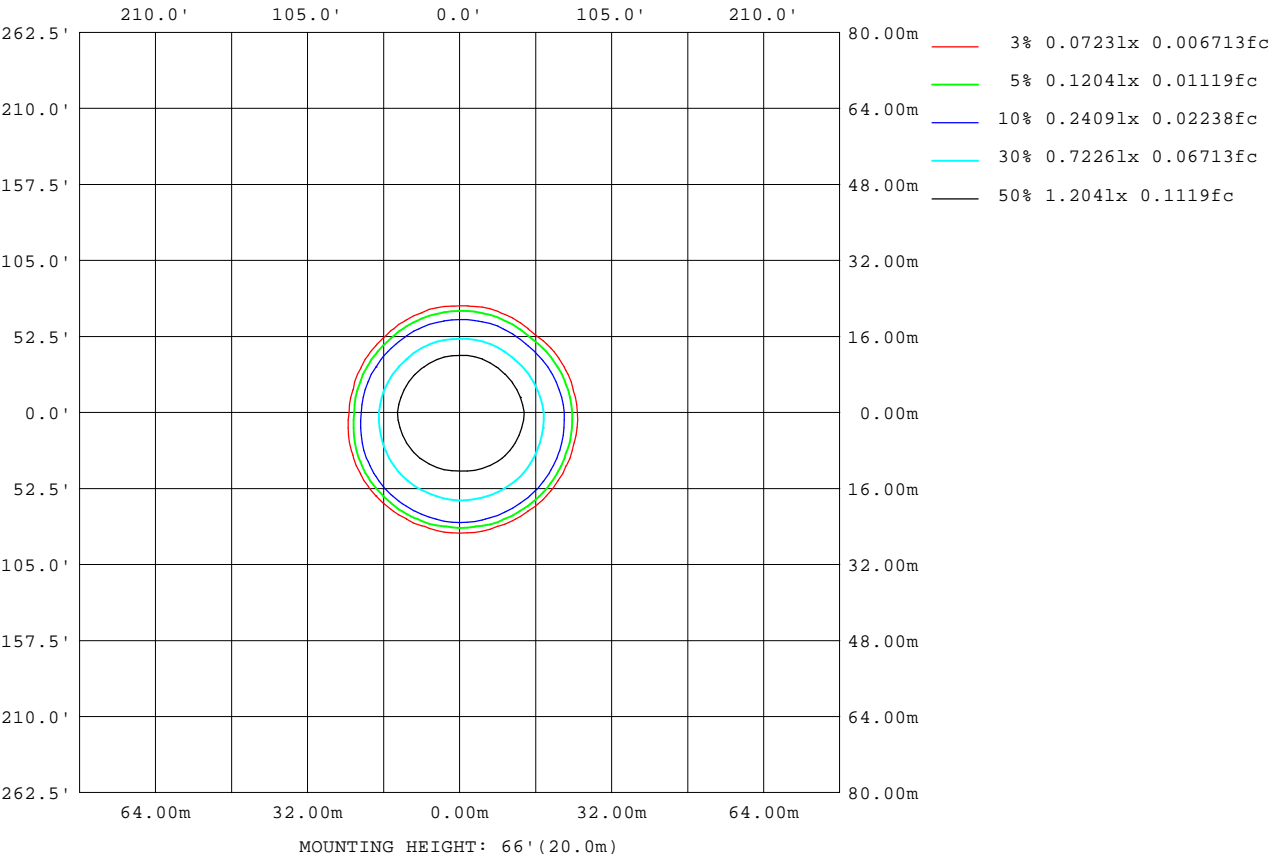

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

Planar Illuminance Curve

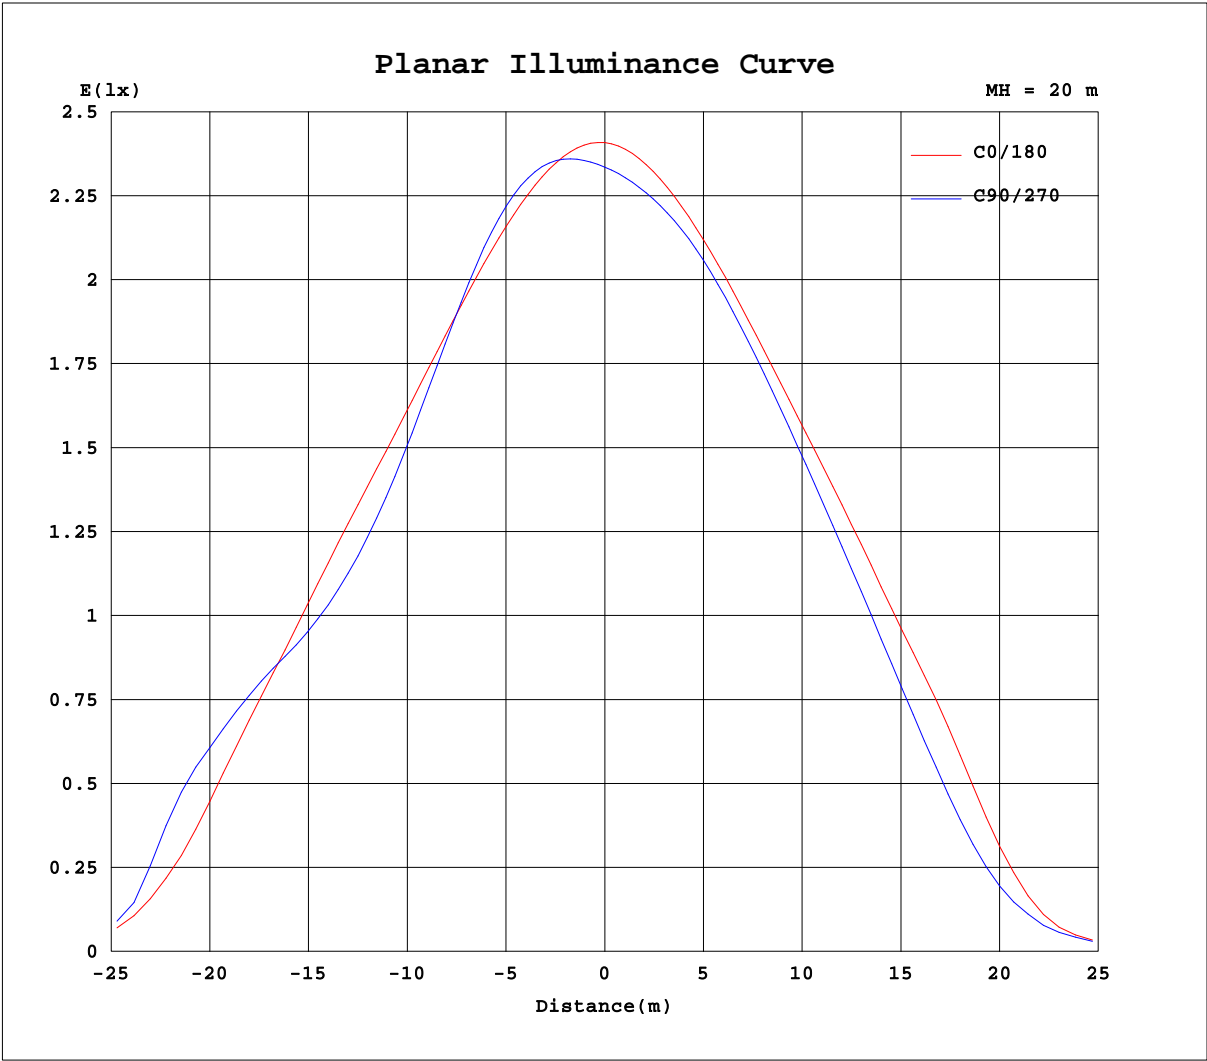


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

AAI Figure

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1613.76x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-3000K-12AH-高亮	DIM.: 0.285*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.:0.160*0.135	Shielding Angle:

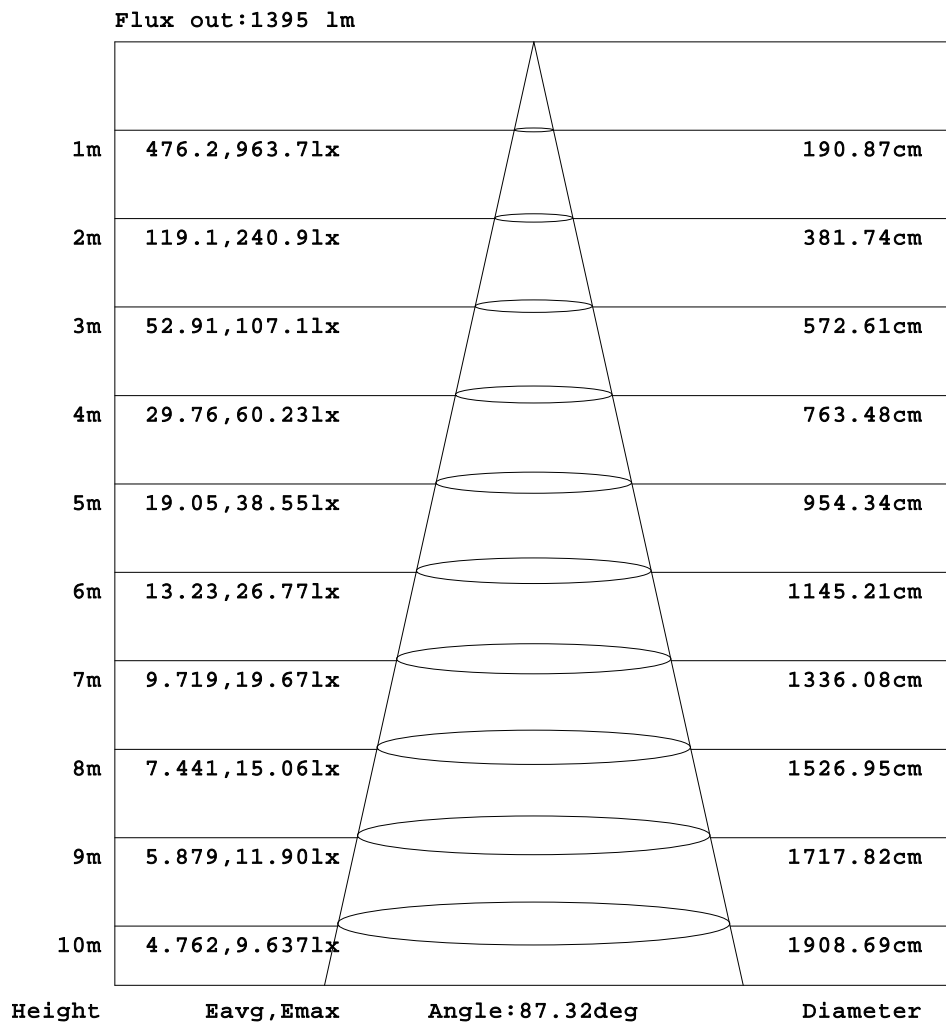

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1613.76x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.: 荣星透镜3CCT-3000K-12AH-高亮									DIM.: 0.285*0.250						SERIAL No.:		
MFR.: EVERFINE									SUR.: 0.160*0.135						Shielding Angle:		

Table--1

UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.17	0.23	0.28	0.34	0.40	0.46	0.51	0.57	0.63	0.69	0.68	0.68	0.67	0.67	0.67	0.66	0.66	0.65	0.65
-85	0.17	0.22	0.27	0.33	0.38	0.43	0.47	0.52	0.59	0.67	0.69	0.76	0.89	0.96	0.98	0.95	0.88	0.80	0.69
-80	0.17	0.22	0.27	0.32	0.39	0.62	1.24	2.01	2.78	3.50	3.71	4.09	4.64	5.11	5.40	5.66	5.89	6.08	6.22
-75	0.17	0.22	0.27	0.36	1.05	2.13	3.03	3.89	4.78	5.41	6.41	7.54	8.14	8.66	9.13	9.60	9.99	10.3	10.5
-70	0.17	0.22	0.28	0.91	2.24	3.29	4.39	5.50	7.06	8.16	9.31	10.4	11.5	12.5	13.6	14.5	15.3	15.9	16.3
-65	0.17	0.21	0.39	1.75	3.07	4.32	6.06	7.39	8.91	10.5	12.6	14.4	16.0	17.7	19.4	21.0	22.7	24.1	25.0
-60	0.17	0.21	0.70	2.41	3.86	5.67	7.25	8.96	11.3	13.9	16.3	18.7	21.6	24.7	27.7	30.5	32.9	34.9	36.3
-55	0.17	0.21	1.19	2.98	4.64	6.56	8.42	11.1	13.9	16.8	20.4	24.5	29.0	34.3	40.7	44.4	47.6	50.7	52.7
-50	0.17	0.22	1.62	3.46	5.50	7.41	9.95	13.0	16.3	20.5	26.0	32.7	40.0	50.7	71.7	112	159	201	221
-45	0.17	0.23	1.99	3.88	6.07	8.26	11.5	14.7	19.1	25.4	34.2	44.9	78.1	179	366	533	622	664	687
-40	0.17	0.23	2.26	4.37	6.57	9.28	12.6	16.6	22.9	32.0	45.7	117	313	553	664	717	742	749	751
-35	0.17	0.27	2.51	4.79	7.00	10.2	13.7	18.9	27.0	39.8	105	332	600	706	749	759	759	757	751
-30	0.17	0.34	2.73	5.08	7.41	10.8	14.6	21.5	31.7	61.5	248	552	706	763	775	785	793	797	795
-25	0.17	0.40	2.90	5.29	7.82	11.3	15.6	23.7	37.6	121	427	659	755	787	808	825	843	858	866
-20	0.17	0.44	3.00	5.44	8.12	11.6	16.7	26.0	47.0	207	534	719	781	816	839	862	888	914	932
-15	0.17	0.47	3.06	5.51	8.30	11.7	17.6	27.7	61.9	291	606	750	808	842	865	886	916	945	969
-10	0.17	0.49	3.10	5.53	8.37	11.7	18.0	28.9	75.7	345	649	770	829	862	886	907	924	950	973
-5	0.17	0.49	3.10	5.50	8.31	11.5	18.0	29.3	80.0	366	667	784	844	875	899	920	936	940	955
0	0.17	0.49	3.07	5.41	8.13	11.2	17.5	28.7	74.6	356	667	790	853	884	906	925	942	955	963
5	0.17	0.48	3.03	5.37	8.12	11.1	17.3	28.2	70.3	326	637	771	839	873	897	914	924	924	921
10	0.17	0.46	2.97	5.28	8.02	11.0	16.8	26.9	59.8	269	583	738	816	857	882	899	906	912	911
15	0.17	0.43	2.87	5.14	7.81	10.7	15.8	24.8	47.6	191	493	685	779	830	860	879	892	898	899
20	0.17	0.40	2.75	4.94	7.52	10.4	14.4	22.3	37.5	116	365	599	721	786	825	851	868	875	876
25	0.17	0.35	2.60	4.68	7.17	9.90	13.1	19.7	30.6	66.9	220	458	624	718	771	808	829	838	840
30	0.17	0.29	2.40	4.36	6.64	9.34	12.0	17.2	25.3	41.1	103	270	462	599	687	736	765	779	781
35	0.17	0.23	2.16	3.95	6.09	8.66	11.0	14.5	20.6	29.8	50.2	113	244	406	530	608	653	674	677
40	0.17	0.20	1.89	3.56	5.39	7.85	10.1	12.5	16.8	22.8	31.5	49.2	91.6	179	288	382	447	481	489
45	0.17	0.19	1.59	3.10	4.71	6.90	9.10	11.1	13.5	17.6	22.8	29.7	40.4	62.3	94.6	142	185	213	221
50	0.17	0.18	1.24	2.62	4.02	5.82	7.94	9.77	11.5	13.6	16.8	20.7	25.3	30.5	37.0	45.2	54.2	62.3	65.2
55	0.17	0.17	0.85	2.18	3.30	4.59	6.50	8.38	9.91	11.3	12.9	14.7	17.3	19.9	22.4	24.9	26.9	28.1	28.5
60	0.17	0.17	0.44	1.67	2.59	3.56	4.76	6.59	8.24	9.54	10.6	11.6	12.7	13.8	15.0	16.1	17.0	17.6	17.8
65	0.17	0.17	0.25	1.09	1.96	2.65	3.41	4.35	5.90	7.35	8.43	8.89	9.23	9.62	10.4	11.3	11.8	12.2	12.3
70	0.17	0.17	0.18	0.46	1.23	1.84	2.32	2.81	3.43	4.09	5.06	6.10	6.59	6.94	7.00	6.95	6.80	6.56	6.25
75	0.17	0.17	0.17	0.20	0.44	0.95	1.38	1.69	1.95	2.20	2.52	2.91	3.33	3.61	3.81	3.95	4.00	3.97	3.87
80	0.17	0.17	0.17	0.17	0.18	0.23	0.35	0.60	0.81	0.98	1.14	1.29	1.41	1.53	1.65	1.75	1.81	1.84	1.84
85	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.18	0.18	0.19	0.20	0.22	0.23	0.24	0.24	0.24	0.24	0.24
90	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1613.76x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-3000K-12AH-高亮	DIM.: 0.285*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.160*0.135	Shielding Angle:

Table--2																		UNIT: cd	
H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.66	0.66	0.67	0.67	0.68	0.68	0.69	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.69	0.69	0.69	0.69	
-85	0.83	0.95	1.06	1.13	1.18	1.18	1.13	1.06	0.95	0.77	0.66	0.66	0.66	0.66	0.67	0.68	0.68	0.69	
-80	6.03	5.80	5.52	5.23	4.92	4.52	4.12	3.68	3.18	2.71	2.23	1.72	1.24	0.86	0.68	0.66	0.68	0.69	
-75	10.2	9.89	9.46	8.97	8.46	7.88	7.18	6.38	5.40	4.45	3.84	3.05	2.32	1.63	1.03	0.69	0.67	0.69	
-70	15.8	15.2	14.4	13.5	12.5	11.2	10.00	8.84	7.83	6.71	5.55	4.17	3.36	2.40	1.56	0.86	0.66	0.69	
-65	24.0	22.6	20.9	19.3	17.5	15.6	14.0	12.3	10.2	8.47	7.09	5.76	4.25	3.17	2.10	1.15	0.66	0.69	
-60	35.0	33.1	30.6	27.9	24.7	21.5	18.5	15.9	13.4	11.1	8.60	6.91	5.43	3.77	2.59	1.44	0.69	0.69	
-55	50.9	48.0	44.7	41.3	35.1	29.4	24.8	20.3	16.6	13.4	10.8	8.12	6.28	4.64	3.07	1.75	0.71	0.69	
-50	208	170	122	77.7	52.9	40.6	34.3	26.5	20.8	16.2	12.6	9.77	7.11	5.29	3.46	2.03	0.79	0.69	
-45	676	647	577	418	216	92.5	47.5	35.3	26.1	19.7	14.6	11.1	8.08	5.81	3.90	2.26	0.89	0.69	
-40	758	760	748	707	618	391	151	50.4	33.6	23.7	17.1	12.3	9.10	6.27	4.34	2.48	0.99	0.69	
-35	763	772	780	782	758	668	433	143	44.2	29.0	19.8	13.7	9.83	6.79	4.67	2.67	1.07	0.69	
-30	803	805	804	803	800	766	637	348	84.2	34.1	22.4	15.2	10.5	7.25	4.91	2.85	1.15	0.69	
-25	866	857	845	833	821	799	732	537	187	43.9	25.4	16.7	11.1	7.69	5.07	3.00	1.21	0.69	
-20	924	907	886	866	846	822	775	637	322	67.0	28.6	17.9	11.5	7.96	5.19	3.10	1.26	0.69	
-15	959	941	917	894	870	844	800	696	425	100	30.9	18.7	11.9	8.09	5.26	3.17	1.29	0.69	
-10	968	956	936	913	889	863	820	726	483	137	33.2	19.2	12.1	8.11	5.27	3.21	1.32	0.69	
-5	964	960	944	924	901	876	834	739	508	159	34.8	19.2	12.0	8.03	5.24	3.22	1.33	0.69	
0	964	956	943	927	908	885	842	739	506	162	34.8	18.8	11.8	7.85	5.16	3.20	1.33	0.69	
5	917	927	924	912	894	868	819	707	466	145	33.6	18.5	11.7	7.85	5.14	3.16	1.31	0.69	
10	909	903	904	893	874	844	784	656	397	115	31.1	17.9	11.4	7.76	5.06	3.09	1.29	0.69	
15	897	891	881	869	846	807	729	575	304	80.5	27.9	16.8	10.9	7.59	4.92	2.99	1.25	0.69	
20	875	869	856	834	804	751	646	458	202	54.6	24.6	15.6	10.3	7.33	4.71	2.87	1.20	0.69	
25	840	833	815	783	736	658	519	305	111	36.1	21.0	14.1	9.68	6.97	4.48	2.72	1.15	0.69	
30	782	771	746	702	625	507	337	158	56.0	27.5	17.9	12.5	9.02	6.49	4.20	2.52	1.08	0.69	
35	677	661	622	553	442	290	152	68.8	33.1	21.6	15.2	11.0	8.32	5.94	3.89	2.30	1.01	0.69	
40	487	461	404	317	209	109	59.2	34.3	23.8	17.2	12.9	9.81	7.60	5.27	3.49	2.10	0.92	0.69	
45	220	197	156	106	67.5	43.2	30.7	23.3	17.9	13.8	10.9	8.72	6.71	4.47	3.07	1.90	0.83	0.69	
50	63.3	56.4	47.5	38.4	31.3	25.6	20.7	16.8	13.7	11.3	9.38	7.66	5.66	3.88	2.68	1.67	0.74	0.69	
55	28.2	27.0	25.0	22.4	19.9	17.3	14.6	12.6	11.0	9.48	8.05	6.32	4.36	3.21	2.26	1.42	0.67	0.69	
60	17.6	17.0	16.1	14.9	13.7	12.4	11.2	10.1	9.08	7.91	6.39	4.65	3.47	2.59	1.86	1.14	0.64	0.69	
65	12.1	11.7	11.2	10.1	9.33	8.88	8.51	8.06	7.08	5.72	4.11	3.30	2.58	2.00	1.48	0.92	0.62	0.69	
70	6.51	6.70	6.81	6.82	6.72	6.42	5.87	5.18	3.84	3.22	2.66	2.24	1.84	1.49	1.06	0.71	0.61	0.69	
75	3.99	4.03	3.95	3.71	3.46	3.14	2.78	2.36	1.99	1.82	1.62	1.42	1.22	0.95	0.73	0.59	0.62	0.69	
80	1.81	1.76	1.69	1.59	1.47	1.32	1.17	1.03	0.91	0.88	0.81	0.70	0.63	0.56	0.53	0.55	0.62	0.69	
85	0.26	0.27	0.27	0.27	0.27	0.25	0.22	0.21	0.20	0.25	0.30	0.35	0.39	0.44	0.50	0.56	0.63	0.69	
90	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.23	0.29	0.34	0.40	0.46	0.52	0.58	0.63	0.69	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	942.9	942.9	942.9	942.9	942.9	942.9	942.9	942.9
3.0	944.1	952.7	954.9	948.5	939.0	933.8	933.9	937.1
6.0	942.0	961.2	968.3	952.2	932.7	925.8	927.2	931.7
9.0	937.3	965.0	979.2	951.4	924.5	918.7	921.6	926.2
12.0	930.7	962.0	983.6	944.7	915.5	911.1	915.7	920.1
15.0	923.0	951.8	978.0	932.9	905.7	902.7	906.9	913.2
18.0	914.2	936.1	959.8	917.0	895.0	892.4	894.3	904.5
21.0	904.0	916.5	929.0	898.5	883.0	878.4	877.8	892.4
24.0	892.8	894.6	888.8	877.9	869.6	858.8	855.9	875.6
27.0	880.5	872.1	844.3	856.5	854.8	832.6	828.0	852.7
30.0	866.4	849.7	802.7	834.5	835.3	796.5	788.5	820.0
33.0	845.8	829.5	771.0	811.0	804.7	748.3	734.4	774.1
36.0	810.2	812.5	755.1	789.2	754.9	680.9	653.4	710.5
39.0	749.3	798.5	756.1	767.6	685.3	571.0	539.7	608.5
42.0	658.0	761.3	750.9	711.5	558.1	412.8	386.8	461.4
45.0	495.4	660.8	693.3	600.6	347.9	232.4	223.2	282.3
48.0	285.2	436.5	505.5	346.9	145.6	101.6	106.2	125.4
51.0	111.4	162.2	147.0	128.5	54.90	49.97	50.71	58.86
54.0	41.42	52.71	65.72	49.60	31.28	31.61	32.11	33.52
57.0	26.17	36.84	49.02	36.80	22.51	23.23	23.41	23.69
60.0	18.42	28.06	36.68	27.96	17.15	17.57	17.94	17.84
63.0	14.24	21.94	29.82	22.24	12.67	13.63	14.45	13.63
66.0	10.49	17.54	22.73	18.07	10.33	11.47	11.20	11.21
69.0	8.293	14.13	17.62	14.95	8.591	9.792	6.826	9.448
72.0	6.629	11.27	14.29	11.46	6.784	7.956	5.449	7.705
75.0	5.053	8.558	10.60	9.195	5.296	4.880	3.908	5.185
78.0	3.984	6.635	8.549	7.222	3.994	2.783	2.633	2.704
81.0	2.766	4.463	5.486	4.873	2.624	1.565	1.449	1.476
84.0	1.679	2.604	1.979	2.650	1.084	0.5846	0.3683	0.6525
87.0	0.7111	0.6467	0.5811	0.6281	0.1676	0.1733	0.1768	0.1780
90.0	0.6764	0.7004	0.6553	0.6966	0.1637	0.1711	0.1749	0.1736

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks: