

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		599.1 cd per klm.
(Luminaire orientation as tested.)		14.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	101.0V x 98.0H
	At 50% of Imax	88.1V x 86.1H
	At 90% of Imax	51.5V x 50.5H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	960.3 lumens per klm.
	To 50% of Imax	874.0 lumens per klm.
	To 90% of Imax	335.2 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:1  
Test Date:2025-10-25

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:6.790m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1595.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-6500K-12AH-高亮	DIM.: 0.285*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.:0.160*0.135	Shielding Angle:

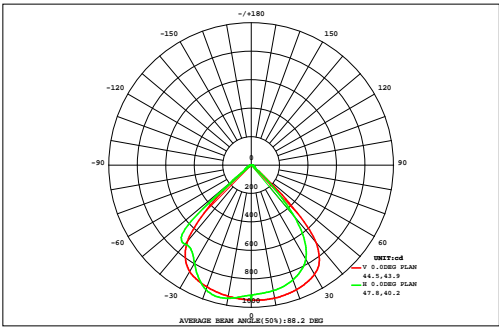

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL	--	Imax(cd)	955.9
NOMINAL POWER(W)		AVAILABILITY(%)	96.1
RATED VOLTAGE(V)		Avai. FLUX(lm)	1533
NOMINAL FLUX(lm)	1595.6	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1596
TEST VOLTAGE(V)	--	θ @50%(H,V)	86,88DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.05	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.01	0.00	0.39	0.00
80	0.00	0.00	0.03	0.08	0.16	0.23	0.30	0.36	0.40	0.38	0.32	0.25	0.17	0.10	0.06	0.02	0.01	2.87	0.00
70	0.00	0.01	0.07	0.16	0.28	0.43	0.58	0.72	0.83	0.81	0.67	0.51	0.35	0.21	0.12	0.05	0.02	5.82	0.00
60	0.00	0.03	0.10	0.22	0.43	0.73	1.09	1.51	2.04	2.04	1.46	0.96	0.60	0.35	0.18	0.08	0.03	11.8	1.54
50	0.00	0.04	0.12	0.30	0.65	1.42	5.76	13.1	17.4	17.4	13.2	6.16	1.44	0.54	0.26	0.11	0.03	78.0	72.5
40	0.00	0.04	0.14	0.39	1.07	7.88	18.9	22.1	22.7	22.7	21.9	18.3	8.39	1.17	0.35	0.13	0.04	146	143
30	0.00	0.05	0.16	0.47	3.35	16.2	22.0	24.7	26.3	26.1	24.3	21.8	15.9	4.06	0.45	0.15	0.04	186	184
	0.00	0.05	0.17	0.56	6.78	19.1	23.8	26.9	28.6	28.1	26.0	23.3	18.7	7.61	0.63	0.17	0.05	211	209
	0.00	0.05	0.17	0.61	8.44	20.2	24.9	27.6	28.6	28.0	26.8	24.3	19.7	9.31	0.80	0.17	0.05	220	218
	0.00	0.04	0.16	0.58	7.85	19.9	24.6	27.0	27.6	27.7	26.7	24.2	19.4	8.79	0.78	0.17	0.05	216	214
	0.00	0.04	0.15	0.48	5.27	17.5	23.1	25.6	26.7	26.8	25.6	22.8	17.1	6.23	0.59	0.16	0.05	198	196
	0.00	0.04	0.13	0.37	2.20	11.8	19.9	23.5	24.9	24.8	23.3	19.6	12.1	2.87	0.42	0.14	0.04	166	164
-30	0.00	0.03	0.11	0.27	0.76	3.99	11.6	17.4	19.6	19.5	17.3	11.8	4.65	0.93	0.30	0.12	0.04	108	105
-40	0.00	0.03	0.09	0.20	0.40	0.87	2.46	5.28	7.18	7.27	5.58	2.80	1.02	0.45	0.22	0.10	0.03	34.0	27.1
-50	0.00	0.02	0.06	0.15	0.25	0.39	0.59	0.83	1.03	1.06	0.88	0.65	0.45	0.28	0.17	0.07	0.02	6.91	0.00
-60	0.00	0.01	0.04	0.08	0.16	0.23	0.30	0.35	0.39	0.40	0.37	0.32	0.26	0.19	0.10	0.04	0.02	3.27	0.00
-70	0.00	0.00	0.02	0.03	0.06	0.09	0.12	0.13	0.14	0.14	0.15	0.13	0.11	0.07	0.04	0.02	0.01	1.25	0.00
-80	0.00	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.38	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Φ t	0.04	0.48	1.73	5.00	38.1	121	180	217	234	233	215	178	120	43.2	5.49	1.74	0.52	0.07	1596
Φ a	0.00	0.00	0.00	0.00	31.9	116	176	213	230	229	210	174	116	38.1	0.29	0.00	0.00	0.00	1533


one-half-peak spread: U:40.3,D:7.0 , L:42.9,REMARK: Beam Type: Type 5 x 6 (H x V)

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:1  
Test Date:2025-10-25

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:6.790m [K=1.0000]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1595.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-6500K-12AH-高亮	DIM.: 0.285*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.:0.160*0.135	Shielding Angle:

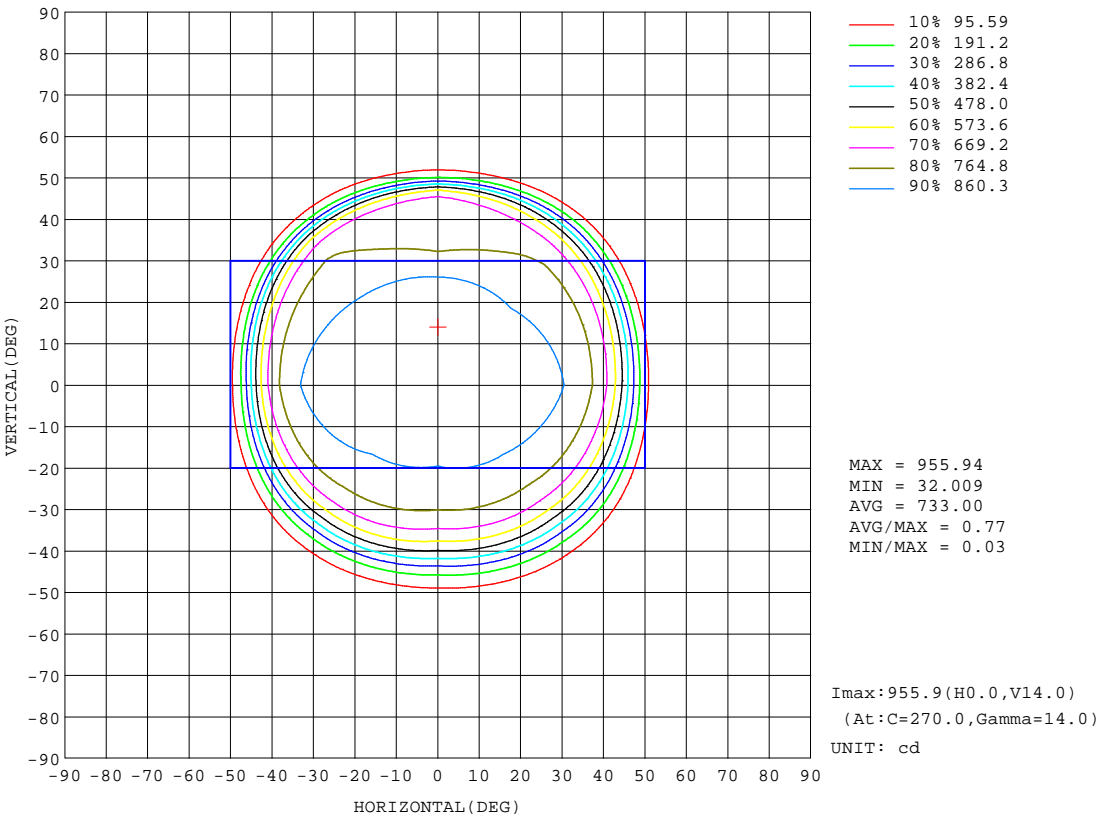


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:1  
Test Date:2025-10-25

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:6.790m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1595.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-6500K-12AH-高亮	DIM.: 0.285*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.:0.160*0.135	Shielding Angle:

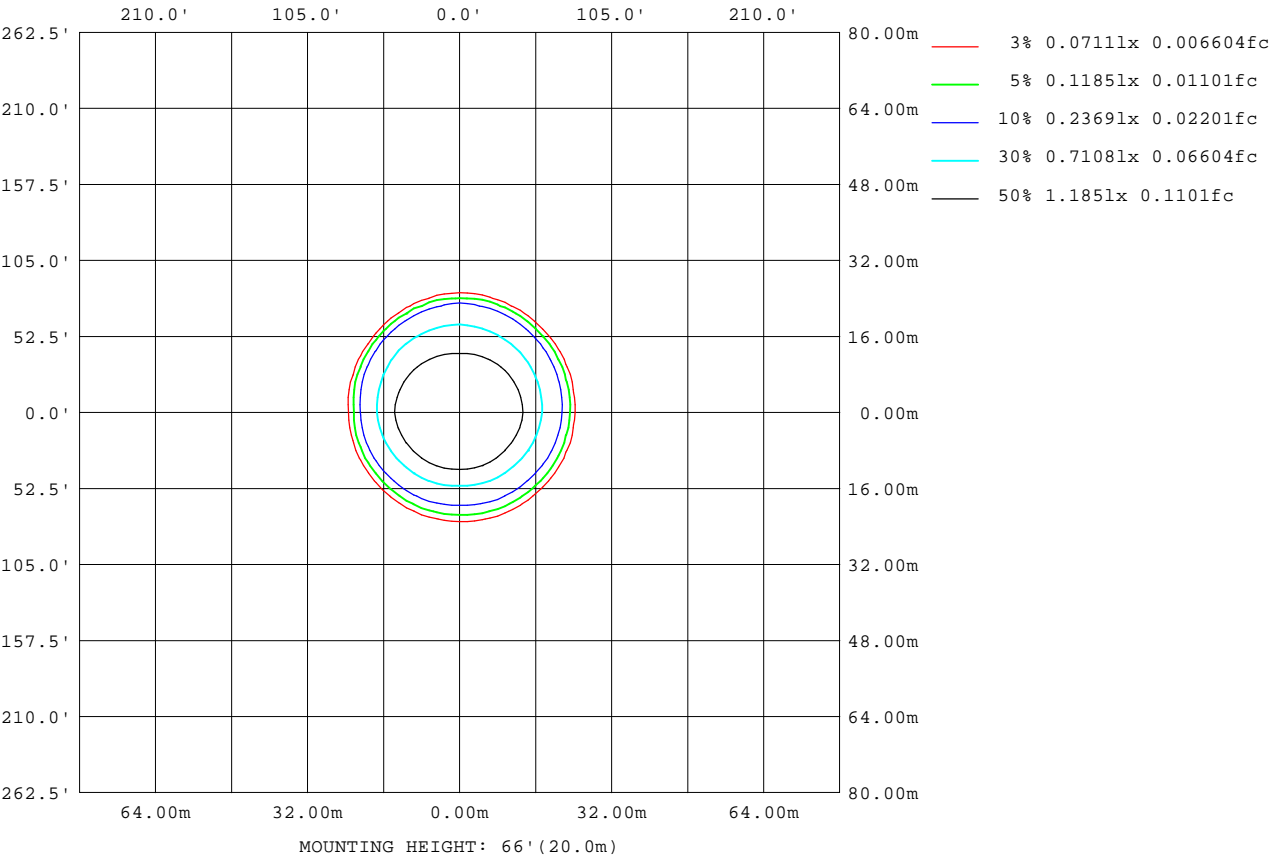

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:1  
Test Date:2025-10-25

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:6.790m [K=1.0000]  
Remarks:

Planar Illuminance Curve

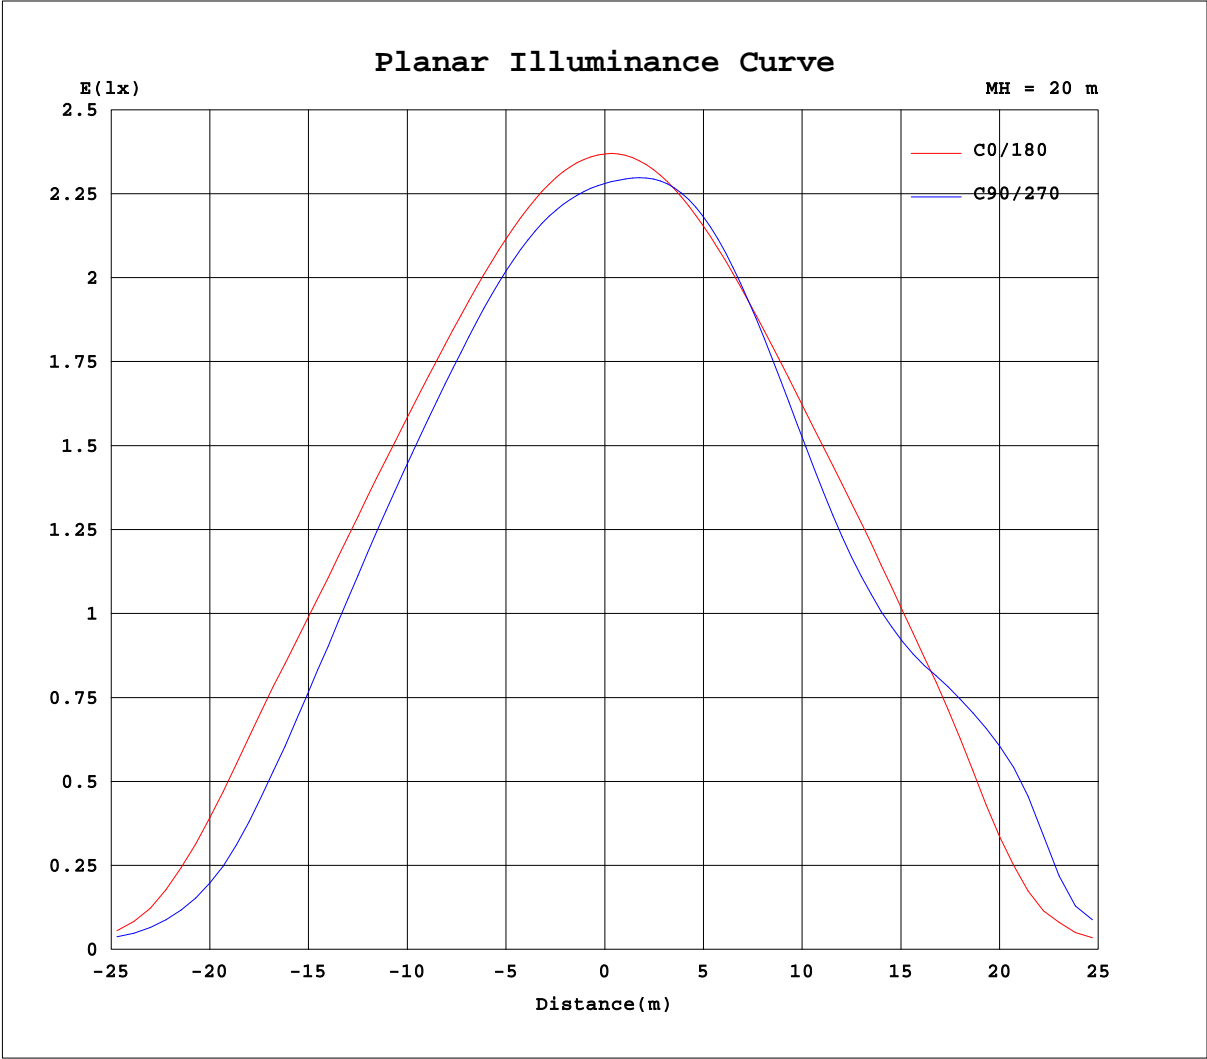


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: 1  
Test Date: 2025-10-25

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity: 65.0%  
Test Distance: 6.790m [K=1.0000]  
Remarks:

## AAI Figure

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1595.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-6500K-12AH-高亮	DIM.: 0.285*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.:0.160*0.135	Shielding Angle:

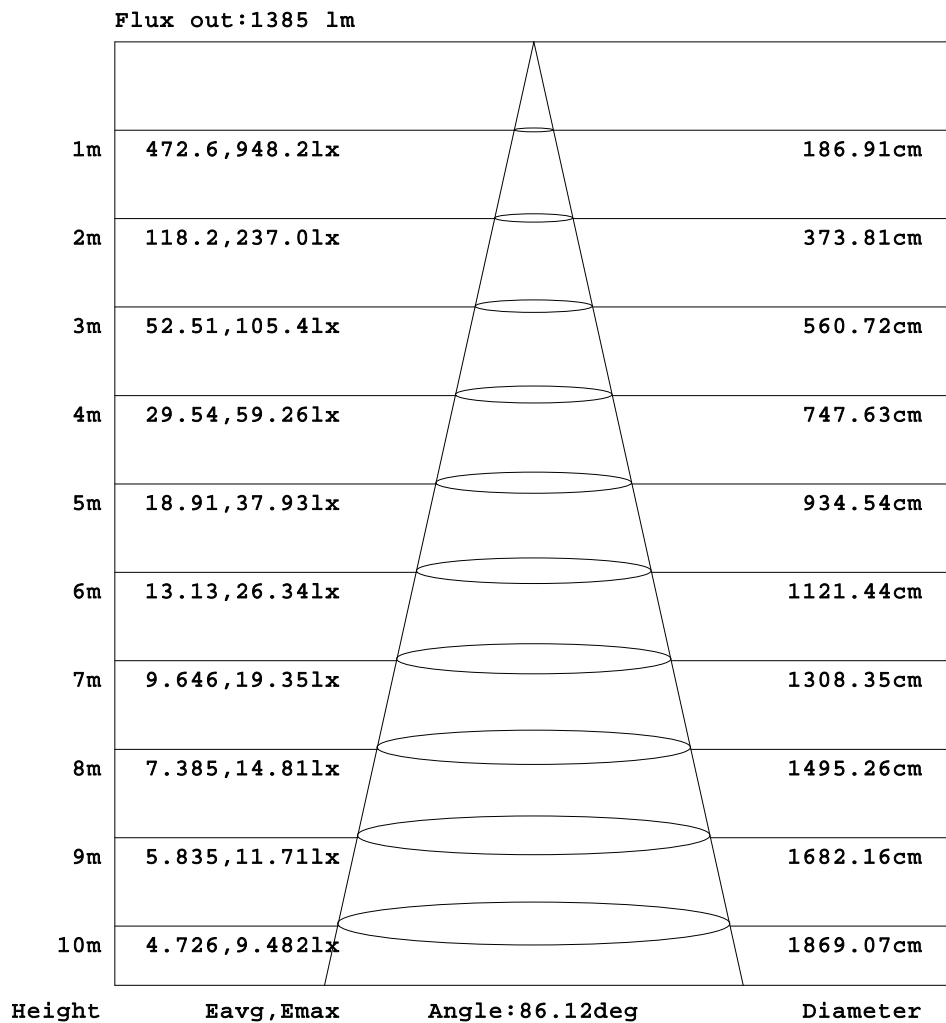

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:1  
Test Date:2025-10-25

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:6.790m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1595.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-6500K-12AH-高亮	DIM.: 0.285*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.160*0.135	Shielding Angle:

Table--1

UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.17	0.25	0.33	0.41	0.49	0.57	0.66	0.74	0.82	0.90	0.92	0.94	0.97	0.99	1.01	1.03	1.06	1.08	1.10
-85	0.17	0.25	0.32	0.39	0.45	0.52	0.58	0.64	0.70	0.77	0.79	0.82	0.87	0.90	0.93	0.95	0.97	0.98	0.99
-80	0.17	0.24	0.31	0.37	0.44	0.54	0.72	1.03	1.26	1.42	1.54	1.68	1.83	1.96	2.08	2.18	2.26	2.32	2.35
-75	0.17	0.24	0.31	0.38	0.61	1.18	1.59	1.92	2.19	2.41	2.79	3.23	3.56	3.86	4.10	4.35	4.44	4.41	4.29
-70	0.17	0.24	0.31	0.54	1.35	1.96	2.46	2.97	3.58	4.29	5.69	6.45	6.99	7.26	7.39	7.40	7.30	7.11	6.84
-65	0.17	0.23	0.34	1.14	2.02	2.73	3.54	4.48	6.18	7.68	8.77	9.27	9.71	10.6	11.7	12.4	13.1	13.6	13.9
-60	0.17	0.23	0.42	1.69	2.65	3.65	5.00	6.79	8.47	9.79	10.9	12.0	13.2	14.5	15.8	17.1	18.0	18.7	19.0
-55	0.17	0.23	0.82	2.19	3.34	4.64	6.64	8.54	10.1	11.6	13.1	15.1	17.8	20.4	23.1	25.9	28.1	29.6	30.1
-50	0.17	0.23	1.19	2.64	3.99	5.91	8.03	9.90	11.8	13.9	17.1	20.9	25.9	31.8	40.5	52.1	63.9	71.7	74.4
-45	0.17	0.23	1.54	3.10	4.71	6.94	9.14	11.3	14.0	17.9	22.9	30.6	44.7	70.8	113	158	197	221	225
-40	0.17	0.24	1.84	3.54	5.52	7.85	10.2	13.0	17.2	23.0	32.6	55.8	112	200	306	393	450	474	473
-35	0.17	0.24	2.11	3.92	6.06	8.60	11.4	15.2	20.9	30.5	55.8	136	274	432	546	614	650	663	658
-30	0.17	0.26	2.34	4.23	6.59	9.32	12.6	17.7	25.6	43.8	120	299	494	623	699	739	761	769	766
-25	0.17	0.28	2.53	4.59	7.07	9.98	13.9	20.2	31.3	72.1	242	493	653	737	780	807	821	826	823
-20	0.17	0.29	2.69	4.89	7.41	10.6	15.2	22.7	38.8	130	397	632	748	802	828	845	856	860	858
-15	0.17	0.30	2.82	5.10	7.67	11.1	16.5	25.1	49.7	207	531	719	806	844	863	870	878	882	882
-10	0.17	0.30	2.92	5.24	7.83	11.5	17.4	27.2	62.4	290	622	775	843	874	890	896	892	895	896
-5	0.17	0.30	2.99	5.32	7.90	11.7	18.0	28.6	72.9	351	677	811	869	896	912	919	917	900	904
0	0.17	0.29	3.02	5.34	7.87	11.8	18.2	29.1	76.8	381	708	834	888	914	931	942	949	951	948
5	0.17	0.29	3.09	5.50	8.16	12.2	18.9	30.0	77.5	387	705	822	876	905	926	941	948	944	930
10	0.17	0.29	3.12	5.60	8.33	12.5	19.2	30.0	69.2	357	686	803	858	890	915	934	945	950	950
15	0.17	0.28	3.11	5.66	8.37	12.6	19.0	29.2	56.4	286	640	777	832	867	894	916	936	948	955
20	0.17	0.26	3.05	5.65	8.30	12.4	18.5	27.8	46.1	190	558	745	802	835	862	887	909	924	932
25	0.17	0.25	2.94	5.52	8.14	12.1	17.5	26.0	38.9	97.9	423	686	772	799	820	842	861	873	876
30	0.17	0.23	2.78	5.29	7.86	11.6	16.4	23.8	34.8	56.1	215	562	728	772	779	788	797	801	797
35	0.17	0.21	2.58	5.01	7.55	10.8	15.3	21.4	30.3	42.2	78.0	290	605	721	753	752	748	743	733
40	0.17	0.19	2.29	4.75	7.24	9.95	14.0	18.9	26.1	35.7	47.2	83.4	260	536	672	719	734	732	725
45	0.17	0.19	1.93	4.41	6.84	9.18	12.6	16.8	22.2	29.2	38.5	48.3	67.8	138	315	503	613	662	687
50	0.17	0.18	1.42	3.89	6.07	8.43	11.0	14.8	18.8	24.0	30.3	37.7	45.5	51.7	65.3	94.9	140	177	196
55	0.17	0.18	0.86	3.27	5.39	7.72	9.79	12.4	16.1	19.7	24.0	28.6	33.6	38.9	44.5	48.8	51.6	53.6	55.0
60	0.17	0.17	0.29	2.54	4.66	6.38	8.71	10.7	13.0	16.2	19.4	22.0	24.9	28.3	31.5	34.5	37.1	39.2	40.6
65	0.17	0.17	0.21	1.48	3.56	5.50	6.97	9.25	11.0	12.9	14.7	16.9	18.8	20.7	22.4	24.1	25.5	26.5	27.3
70	0.17	0.17	0.19	0.36	2.15	3.95	5.73	7.10	8.70	10.7	11.8	12.8	14.0	15.1	16.1	17.1	17.9	18.6	19.0
75	0.17	0.17	0.17	0.19	0.36	1.76	3.49	4.88	6.41	7.80	8.43	9.15	10.4	11.2	11.7	12.1	12.4	12.7	12.9
80	0.17	0.17	0.17	0.17	0.18	0.21	0.27	1.20	2.43	3.87	4.57	5.18	5.74	6.34	6.92	7.40	7.78	8.04	8.18
85	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.18	0.18	0.18	0.19	0.19	0.21	0.22	0.23	0.23	0.23	0.23	0.23
90	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:1  
Test Date:2025-10-25

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:6.790m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:1595.6x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜3CCT-6500K-12AH-高亮	DIM.: 0.285*0.250	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.160*0.135	Shielding Angle:

Table--2																		UNIT: cd	
H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	1.09	1.08	1.07	1.07	1.06	1.05	1.04	1.03	1.02	0.98	0.95	0.91	0.88	0.84	0.80	0.77	0.73	0.70	
-85	1.02	1.04	1.06	1.07	1.07	1.06	1.04	1.02	0.99	0.95	0.90	0.86	0.81	0.78	0.76	0.74	0.72	0.70	
-80	2.37	2.37	2.33	2.27	2.17	2.08	1.97	1.84	1.70	1.63	1.53	1.37	1.18	0.98	0.81	0.73	0.71	0.70	
-75	4.58	4.80	4.92	4.92	4.65	4.12	3.73	3.34	2.96	2.62	2.33	2.05	1.80	1.48	1.10	0.80	0.70	0.70	
-70	7.25	7.57	7.81	7.97	8.06	8.02	7.72	7.07	6.03	4.27	3.51	2.92	2.43	1.99	1.52	0.97	0.70	0.70	
-65	13.7	13.4	13.0	12.3	11.4	10.6	10.2	9.93	9.08	7.55	5.83	4.06	3.21	2.51	1.93	1.24	0.71	0.70	
-60	19.0	18.8	18.1	17.2	16.0	14.5	13.2	12.1	10.9	9.58	8.03	6.06	4.14	3.11	2.30	1.53	0.77	0.70	
-55	30.1	29.2	27.4	25.0	22.4	20.0	17.6	14.9	12.8	11.1	9.51	7.75	5.58	3.78	2.70	1.80	0.82	0.70	
-50	73.8	67.5	56.3	44.6	35.4	28.9	23.8	19.8	16.1	12.9	10.8	8.95	6.84	4.48	3.12	2.05	0.91	0.70	
-45	226	206	171	127	81.8	52.0	35.4	26.5	20.3	15.9	12.3	9.93	7.87	5.42	3.53	2.27	1.02	0.70	
-40	473	450	398	321	226	134	68.1	38.3	26.4	19.3	14.4	11.0	8.66	6.16	3.95	2.46	1.12	0.70	
-35	659	644	606	540	439	302	167	71.9	35.6	23.5	17.0	12.2	9.31	6.86	4.34	2.66	1.22	0.70	
-30	767	755	730	686	612	497	334	160	57.0	29.0	19.4	13.6	9.96	7.38	4.67	2.88	1.31	0.70	
-25	825	818	800	769	721	640	501	292	103	37.0	22.3	15.3	10.6	7.78	5.01	3.06	1.40	0.70	
-20	861	856	843	820	787	729	622	430	183	52.1	25.5	16.6	11.1	8.09	5.27	3.20	1.47	0.70	
-15	885	882	872	857	830	786	702	541	276	71.5	28.3	17.7	11.6	8.29	5.45	3.31	1.52	0.70	
-10	901	900	895	881	859	823	753	619	354	96.0	30.9	18.5	12.0	8.41	5.56	3.40	1.56	0.70	
-5	914	918	911	899	879	848	786	668	413	117	32.8	18.9	12.2	8.44	5.60	3.45	1.59	0.70	
0	943	936	925	911	893	865	806	697	445	127	33.4	19.0	12.3	8.39	5.59	3.48	1.60	0.70	
5	914	921	915	902	884	854	799	694	443	124	33.2	19.3	12.4	8.51	5.63	3.49	1.59	0.70	
10	929	907	901	889	869	838	784	675	412	107	31.8	19.1	12.4	8.53	5.62	3.46	1.55	0.70	
15	932	907	883	870	849	815	762	632	350	79.8	29.7	18.6	12.2	8.45	5.55	3.40	1.51	0.70	
20	913	890	866	844	821	789	728	563	251	57.6	27.4	17.7	11.8	8.26	5.42	3.31	1.44	0.70	
25	867	850	830	811	791	759	664	448	144	39.5	24.4	16.5	11.3	7.97	5.26	3.19	1.37	0.70	
30	798	792	783	774	760	699	551	268	68.3	32.0	21.6	15.1	10.7	7.53	5.05	3.01	1.28	0.70	
35	742	746	747	738	691	576	331	105	39.3	27.0	19.1	13.6	9.91	7.03	4.75	2.79	1.17	0.70	
40	727	724	702	649	528	301	109	43.1	31.1	22.4	16.6	12.3	9.09	6.40	4.34	2.59	1.07	0.70	
45	659	608	509	341	172	73.6	41.1	32.2	24.4	18.7	14.3	10.9	8.17	5.86	3.91	2.37	0.96	0.70	
50	183	150	102	66.6	47.0	38.4	31.0	24.5	19.5	15.6	12.3	9.54	7.15	5.24	3.50	2.09	0.85	0.70	
55	52.5	49.3	45.4	40.6	34.3	28.6	23.4	19.0	15.8	13.0	10.4	8.09	6.20	4.42	3.02	1.77	0.76	0.70	
60	38.3	35.5	32.2	28.6	24.8	21.1	18.0	15.1	12.7	10.5	8.45	6.72	5.16	3.72	2.53	1.43	0.70	0.70	
65	26.0	24.3	22.4	20.3	18.0	15.8	13.7	11.6	9.75	8.13	6.79	5.34	4.02	2.95	1.98	1.10	0.64	0.70	
70	18.1	17.1	15.9	14.6	13.2	11.6	9.93	8.46	7.33	6.12	4.79	3.90	2.99	2.19	1.37	0.83	0.63	0.70	
75	12.3	11.6	10.9	10.1	9.22	8.21	6.83	5.55	4.51	3.91	3.21	2.56	1.89	1.27	0.86	0.65	0.63	0.70	
80	7.67	7.07	6.38	5.65	4.91	4.11	3.37	2.79	2.37	1.86	1.40	1.02	0.79	0.66	0.59	0.58	0.63	0.70	
85	0.28	0.33	0.36	0.38	0.38	0.36	0.30	0.27	0.28	0.33	0.38	0.42	0.44	0.48	0.53	0.58	0.64	0.70	
90	0.18	0.18	0.19	0.20	0.20	0.21	0.22	0.22	0.23	0.28	0.33	0.39	0.44	0.49	0.54	0.59	0.64	0.70	

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:1  
Test Date:2025-10-25

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:6.790m [K=1.0000]  
Remarks:



## Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	922.9	922.9	922.9	922.9	922.9	922.9	922.9	922.9
3.0	920.3	917.5	916.9	920.1	925.1	930.6	932.0	926.5
6.0	917.2	912.8	912.7	917.4	925.7	938.9	945.0	930.3
9.0	912.9	907.9	908.1	914.8	924.6	945.0	957.2	931.2
12.0	907.3	902.3	901.3	911.3	921.9	945.8	965.3	928.0
15.0	900.6	894.6	891.9	905.7	917.5	940.8	966.0	921.5
18.0	893.0	884.0	878.7	897.3	911.6	930.3	955.5	911.9
21.0	883.8	869.8	861.4	885.6	903.8	914.0	933.6	899.5
24.0	873.5	850.5	840.3	869.9	893.8	892.5	899.3	884.2
27.0	860.7	825.1	813.7	848.7	881.2	867.7	856.1	865.6
30.0	842.1	792.2	775.1	819.9	864.4	839.0	806.1	842.8
33.0	812.5	748.5	717.6	778.6	839.4	809.5	762.5	818.3
36.0	769.6	683.8	636.6	714.7	794.0	786.3	734.2	796.6
39.0	707.0	586.8	522.4	609.3	721.9	767.7	729.3	767.8
42.0	601.6	451.8	376.0	453.2	596.9	720.6	734.8	700.7
45.0	433.1	290.7	227.2	266.7	371.4	594.6	694.5	577.6
48.0	231.8	149.4	120.6	129.5	150.1	291.9	458.8	336.3
51.0	88.89	68.56	62.03	58.37	55.77	87.50	144.3	117.2
54.0	38.58	38.40	34.56	33.54	31.45	50.34	59.96	45.13
57.0	25.70	27.07	24.95	23.80	22.89	40.96	51.91	34.24
60.0	18.52	20.60	19.21	18.21	17.72	32.20	41.03	26.33
63.0	14.57	16.24	15.88	14.17	13.55	25.88	32.85	20.74
66.0	10.96	13.08	12.88	11.93	10.62	21.06	25.90	16.88
69.0	8.772	11.20	7.656	10.27	8.346	17.40	20.46	13.68
72.0	7.106	9.589	5.838	8.408	6.560	13.75	17.01	10.75
75.0	5.442	7.073	4.336	5.725	5.196	11.50	13.03	8.100
78.0	4.259	3.661	3.157	3.170	3.884	8.512	9.994	5.822
81.0	3.039	2.276	2.000	1.957	2.504	6.104	6.499	3.693
84.0	1.952	1.478	1.141	1.201	0.9116	1.750	0.3828	1.492
87.0	0.8052	0.9236	0.9306	0.7833	0.1745	0.1769	0.1772	0.2580
90.0	0.6769	1.017	1.114	0.9149	0.1649	0.1728	0.1732	0.2353

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: 1  
Test Date: 2025-10-25

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity: 65.0%  
Test Distance: 6.790m [K=1.0000]  
Remarks: