

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		655.6 cd per klm.
(Luminaire orientation as tested.)		-14.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	98.4V x 96.3H
	At 50% of Imax	83.7V x 82.4H
	At 90% of Imax	33.5V x 35.5H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	965.6 lumens per klm.
	To 50% of Imax	868.5 lumens per klm.
	To 90% of Imax	189.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:445.79x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-3000K-5AH-自动	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

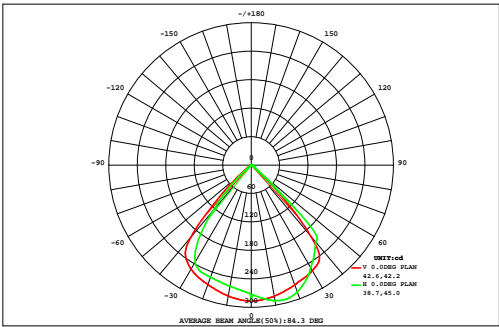

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL	--	Imax(cd)	292.3
NOMINAL POWER(W)		AVAILABILITY(%)	96.7
RATED VOLTAGE(V)		Avai. FLUX(lm)	430.9
NOMINAL FLUX(lm)	445.79	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	445.8
TEST VOLTAGE(V)	--	θ @50%(H,V)	82,84DEG

		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00	
VERTICAL (DEG)	80	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.22	0.00
	70	0.00	0.00	0.01	0.02	0.04	0.05	0.06	0.08	0.08	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.00	0.00	0.64	0.00
	60	0.00	0.00	0.01	0.03	0.06	0.09	0.12	0.16	0.19	0.19	0.16	0.12	0.08	0.05	0.03	0.01	0.00	0.00	1.32	0.00
	50	0.00	0.00	0.02	0.05	0.09	0.17	0.58	1.33	1.89	1.88	1.34	0.60	0.18	0.09	0.05	0.02	0.01	0.00	8.31	6.43
	40	0.00	0.01	0.03	0.07	0.16	0.95	2.93	4.89	5.76	5.66	4.67	2.80	1.00	0.18	0.07	0.03	0.01	0.00	29.2	28.3
	30	0.00	0.01	0.03	0.08	0.50	2.97	5.89	7.15	7.50	7.41	6.85	5.47	2.93	0.61	0.09	0.04	0.01	0.00	47.5	46.9
		0.00	0.01	0.04	0.11	1.20	4.96	6.90	7.51	7.77	7.65	7.26	6.62	4.77	1.37	0.13	0.04	0.01	0.00	56.3	55.8
		0.00	0.01	0.04	0.13	1.84	5.85	7.16	7.86	8.16	7.99	7.75	7.05	5.67	2.05	0.18	0.04	0.01	0.00	61.8	61.3
		0.00	0.01	0.04	0.14	1.98	5.93	7.16	7.99	8.42	8.60	8.09	7.18	5.84	2.21	0.19	0.05	0.01	0.00	63.8	63.3
		0.00	0.01	0.04	0.13	1.50	5.44	6.85	7.72	8.52	8.64	7.93	6.97	5.47	1.71	0.15	0.04	0.01	0.00	61.1	60.6
	0.00	0.01	0.04	0.10	0.70	4.20	6.31	7.23	7.98	8.04	7.42	6.50	4.34	0.82	0.11	0.04	0.01	0.00	53.8	53.2	
	0.00	0.01	0.03	0.08	0.25	1.64	4.94	6.45	6.94	6.99	6.55	5.06	1.77	0.28	0.08	0.03	0.01	0.00	41.1	40.2	
	0.00	0.01	0.02	0.06	0.13	0.32	1.09	2.72	3.91	3.93	2.79	1.14	0.34	0.13	0.06	0.02	0.01	0.00	16.7	15.0	
	0.00	0.00	0.02	0.04	0.08	0.14	0.21	0.30	0.38	0.39	0.30	0.21	0.13	0.08	0.04	0.02	0.00	0.00	2.35	0.00	
	0.00	0.00	0.01	0.02	0.05	0.07	0.10	0.12	0.14	0.14	0.12	0.10	0.07	0.05	0.02	0.01	0.00	0.00	1.01	0.00	
	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.35	0.00	
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.00	
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)					20	30	40	50	60	70	80	90
Φ t	0.01	0.09	0.39	1.09	8.62	32.8	50.4	61.6	67.7	67.7	61.4	49.9	32.7	9.69	1.23	0.41	0.10	0.01	446	---	
Φ a	0.00	0.00	0.00	0.00	7.02	31.7	49.3	60.6	66.7	66.7	60.3	48.9	31.5	8.25	0.00	0.00	0.00	0.00	---	431	


one-half-peak spread: U:31.1,D:38.8 , L:41.1,R:41.5 NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:445.79x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-3000K-5AH-自动	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

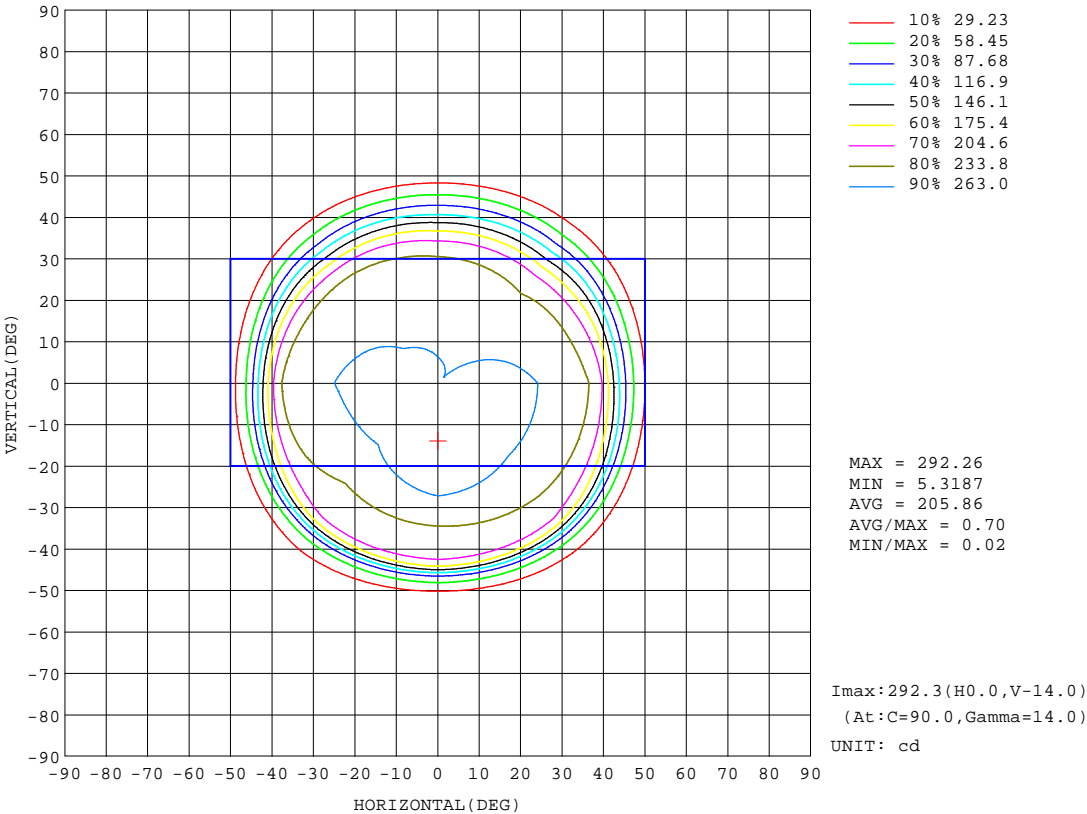


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:445.79x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-3000K-5AH-自动	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

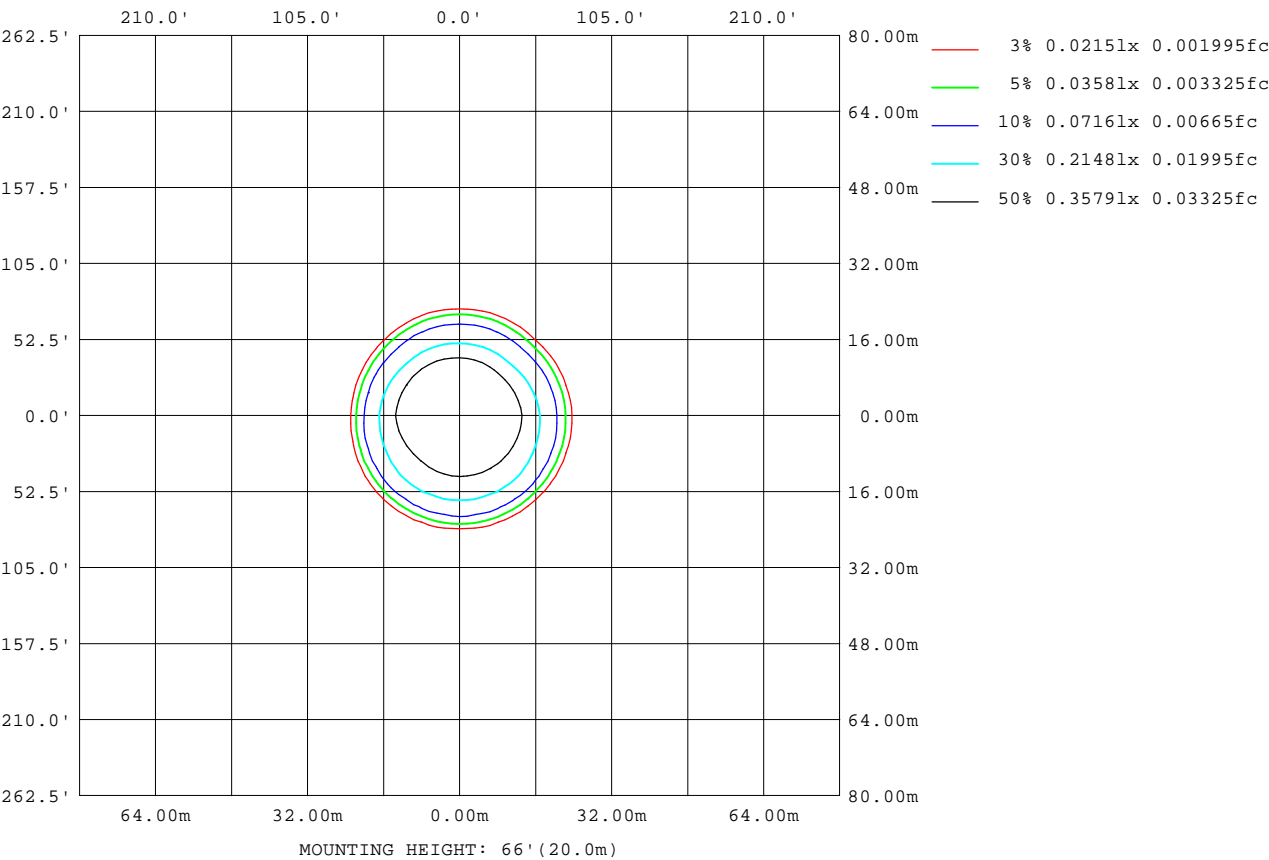

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

Planar Illuminance Curve

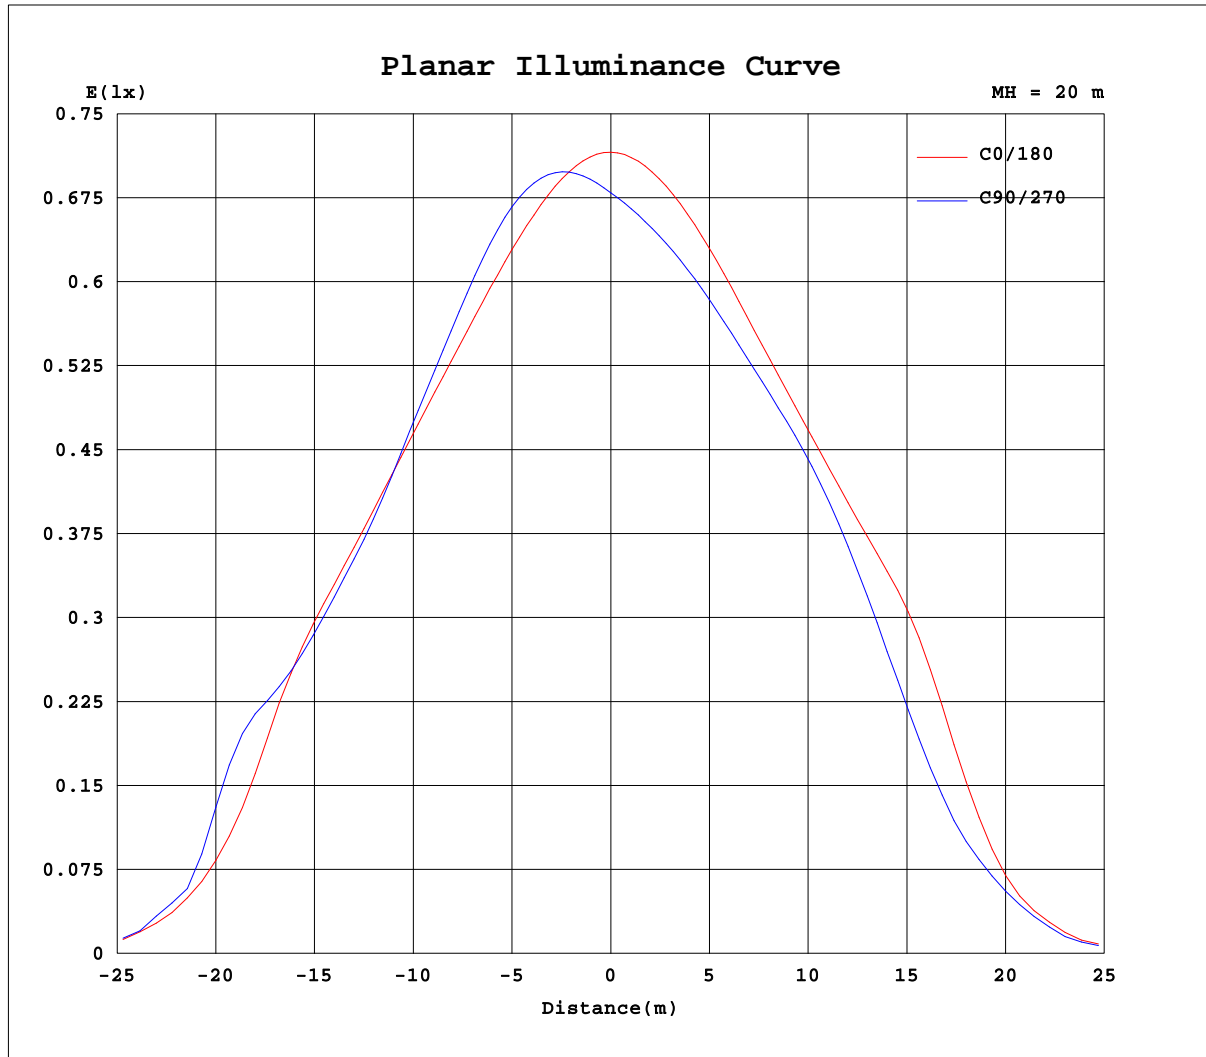


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

AAI Figure

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:445.79x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-3000K-5AH-自动	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

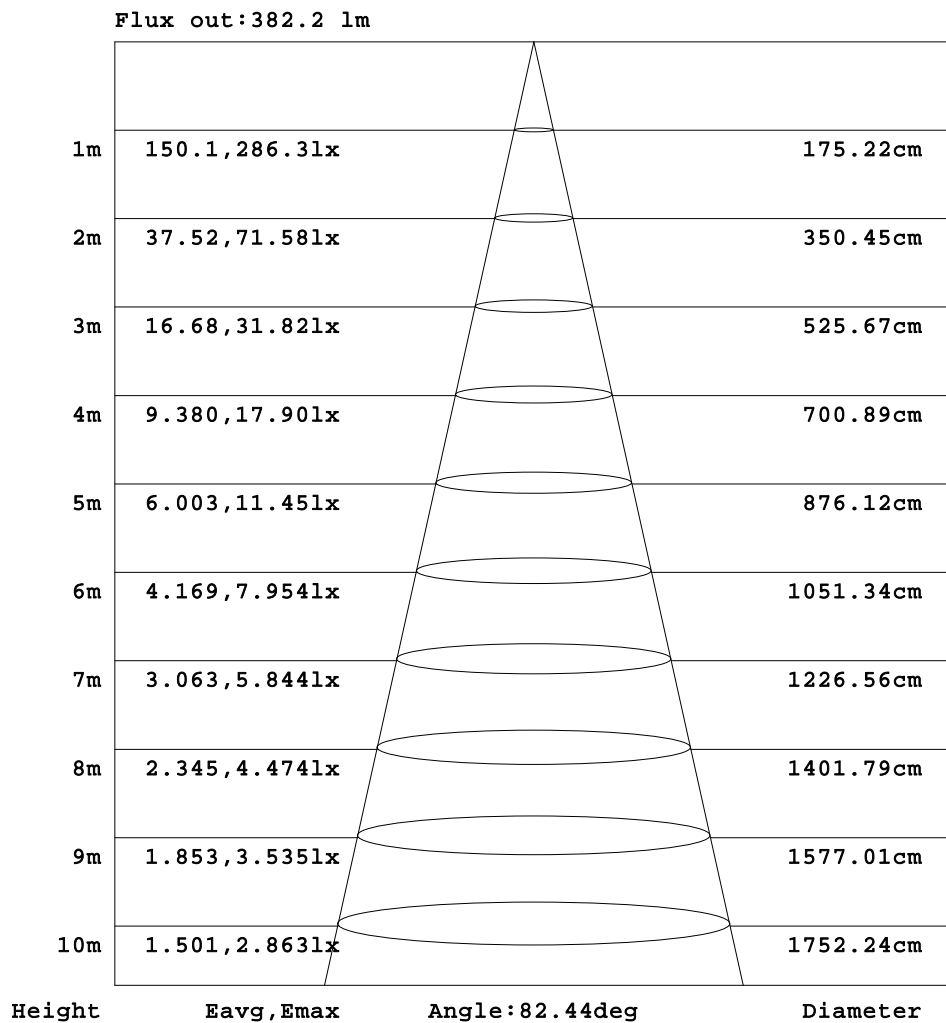

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:445.79x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-3000K-5AH-自动	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.150*0.105	Shielding Angle:

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.04	0.06	0.07	0.08	0.10	0.11	0.13	0.14	0.16	0.17	0.17	0.17	0.16	0.16	0.16	0.16	0.16	0.16	0.15
-85	0.04	0.06	0.07	0.08	0.09	0.10	0.11	0.13	0.14	0.15	0.14	0.14	0.14	0.14	0.14	0.13	0.13	0.13	0.13
-80	0.04	0.06	0.07	0.08	0.09	0.10	0.11	0.13	0.15	0.17	0.26	0.30	0.30	0.30	0.36	0.39	0.39	0.37	0.33
-75	0.04	0.05	0.07	0.08	0.09	0.13	0.23	0.36	0.57	0.76	0.85	0.99	1.18	1.29	1.35	1.36	1.35	1.33	1.29
-70	0.04	0.05	0.07	0.08	0.15	0.34	0.63	0.79	1.08	1.46	1.68	1.83	2.00	2.22	2.37	2.52	2.66	2.74	2.77
-65	0.04	0.05	0.07	0.12	0.34	0.66	0.90	1.32	1.68	2.04	2.37	2.83	3.26	3.53	3.72	3.89	4.05	4.15	4.17
-60	0.04	0.05	0.07	0.23	0.59	0.87	1.32	1.77	2.22	2.94	3.63	4.04	4.54	5.07	5.76	6.27	6.68	6.97	7.15
-55	0.04	0.05	0.08	0.36	0.70	1.16	1.69	2.25	3.16	3.86	4.66	5.43	6.33	7.14	7.89	8.83	9.86	10.7	11.1
-50	0.04	0.05	0.12	0.52	0.90	1.44	2.06	3.03	3.84	4.78	5.90	7.08	8.53	11.2	15.5	20.4	25.2	29.6	31.0
-45	0.04	0.05	0.17	0.62	1.07	1.73	2.60	3.55	4.60	5.86	7.29	10.4	18.1	30.7	51.2	72.6	106	135	148
-40	0.04	0.05	0.25	0.68	1.25	1.99	3.10	4.12	5.40	6.92	10.6	23.5	47.7	92.4	166	202	210	212	212
-35	0.04	0.05	0.32	0.78	1.43	2.32	3.43	4.68	6.17	9.09	21.5	52.2	129	202	214	220	226	230	232
-30	0.04	0.05	0.37	0.86	1.61	2.67	3.78	5.18	6.98	14.7	42.7	119	203	218	227	234	241	247	251
-25	0.04	0.06	0.42	0.92	1.71	2.89	4.12	5.61	8.47	24.5	77.8	185	220	230	237	246	257	265	270
-20	0.04	0.06	0.47	0.96	1.83	3.03	4.37	5.90	11.0	39.7	129	210	233	240	246	256	267	277	284
-15	0.04	0.06	0.52	1.00	1.93	3.14	4.52	6.15	14.3	55.6	163	227	241	249	256	262	272	283	292
-10	0.04	0.05	0.54	1.03	1.99	3.20	4.60	6.34	17.2	70.6	183	238	248	256	262	268	272	281	290
-5	0.04	0.05	0.56	1.04	2.01	3.21	4.59	6.37	18.9	79.8	194	244	253	260	266	272	276	273	282
0	0.04	0.05	0.56	1.03	2.00	3.18	4.52	6.18	18.5	79.1	197	249	257	263	268	275	280	285	286
5	0.04	0.05	0.55	1.03	1.99	3.14	4.46	6.04	17.5	73.7	184	242	255	260	264	268	270	268	265
10	0.04	0.05	0.53	1.01	1.95	3.06	4.35	5.76	14.7	61.5	160	231	250	256	259	261	261	261	259
15	0.04	0.05	0.50	0.97	1.87	2.94	4.17	5.42	11.1	46.8	127	209	242	252	254	255	256	256	255
20	0.04	0.05	0.46	0.92	1.77	2.79	3.93	5.10	7.89	31.5	88.7	170	222	244	250	252	252	253	252
25	0.04	0.05	0.40	0.87	1.63	2.62	3.63	4.76	6.23	17.0	55.1	118	181	221	240	246	249	249	249
30	0.04	0.05	0.35	0.80	1.51	2.41	3.26	4.30	5.32	8.70	29.4	69.1	120	169	207	226	234	237	236
35	0.04	0.05	0.30	0.71	1.31	2.12	2.91	3.83	4.79	5.87	11.8	33.4	65.4	104	142	171	189	197	196
40	0.04	0.05	0.24	0.61	1.13	1.84	2.60	3.30	4.16	4.94	5.96	11.4	27.7	51.2	75.6	97.9	114	124	126
45	0.04	0.05	0.16	0.54	0.96	1.55	2.24	2.83	3.49	4.23	4.86	5.56	7.99	16.0	28.3	42.2	53.5	60.8	63.2
50	0.04	0.04	0.11	0.46	0.77	1.25	1.84	2.44	2.89	3.43	4.04	4.58	4.98	5.61	6.92	9.82	13.0	15.2	15.8
55	0.04	0.04	0.07	0.32	0.58	1.01	1.45	1.97	2.43	2.77	3.15	3.61	4.06	4.38	4.59	4.79	4.99	5.12	5.14
60	0.04	0.04	0.05	0.20	0.48	0.69	1.10	1.47	1.90	2.28	2.54	2.71	3.02	3.35	3.62	3.81	3.92	3.97	3.96
65	0.04	0.04	0.05	0.09	0.28	0.49	0.68	1.08	1.34	1.63	1.95	2.10	2.20	2.28	2.35	2.42	2.49	2.53	2.51
70	0.04	0.04	0.04	0.05	0.12	0.27	0.44	0.55	0.78	1.14	1.27	1.36	1.45	1.54	1.62	1.63	1.60	1.55	1.48
75	0.04	0.04	0.04	0.05	0.05	0.09	0.16	0.26	0.36	0.45	0.53	0.64	0.77	0.88	0.92	0.91	0.89	0.85	0.80
80	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.06	0.08	0.10	0.15	0.18	0.20	0.22	0.25	0.27	0.28	0.28	0.27
85	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
90	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:445.79x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-3000K-5AH-自动	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.150*0.105	Shielding Angle:

Table--2																		UNIT: cd	
H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.16	0.16	0.16	0.16	0.17	0.17	0.17	0.17	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	
-85	0.13	0.14	0.14	0.14	0.15	0.15	0.15	0.16	0.16	0.16	0.16	0.16	0.16	0.17	0.17	0.17	0.17	0.18	
-80	0.37	0.39	0.41	0.42	0.43	0.41	0.34	0.31	0.31	0.24	0.19	0.17	0.17	0.17	0.16	0.17	0.17	0.18	
-75	1.32	1.34	1.35	1.35	1.31	1.24	1.05	0.89	0.75	0.65	0.50	0.37	0.26	0.18	0.17	0.16	0.17	0.18	
-70	2.75	2.67	2.54	2.37	2.19	1.97	1.79	1.64	1.46	1.17	0.84	0.65	0.46	0.33	0.19	0.17	0.17	0.18	
-65	4.13	4.02	3.84	3.65	3.45	3.23	2.91	2.38	2.00	1.68	1.36	0.99	0.68	0.47	0.29	0.17	0.17	0.18	
-60	6.95	6.64	6.21	5.67	4.94	4.41	3.93	3.51	3.01	2.26	1.79	1.38	0.95	0.62	0.41	0.19	0.17	0.18	
-55	10.7	10.0	8.97	7.89	7.04	6.19	5.26	4.46	3.79	3.15	2.35	1.74	1.24	0.79	0.51	0.24	0.17	0.18	
-50	29.7	25.4	20.6	16.0	11.8	8.88	6.94	5.74	4.64	3.82	3.05	2.15	1.53	0.99	0.60	0.32	0.17	0.18	
-45	136	109	75.6	53.1	31.2	18.5	11.2	7.37	5.76	4.52	3.58	2.74	1.82	1.17	0.68	0.40	0.17	0.18	
-40	212	210	204	172	98.2	50.6	24.2	11.8	7.04	5.35	4.14	3.12	2.12	1.40	0.78	0.44	0.17	0.18	
-35	232	229	224	216	204	137	57.3	23.4	10.2	6.13	4.66	3.53	2.53	1.56	0.87	0.48	0.17	0.18	
-30	249	245	240	234	223	205	129	48.4	17.3	7.55	5.21	3.90	2.77	1.72	0.97	0.53	0.18	0.18	
-25	267	261	253	245	238	223	188	88.3	30.0	10.1	5.62	4.19	2.98	1.86	1.03	0.56	0.18	0.18	
-20	279	272	263	254	246	236	212	140	47.7	14.3	6.08	4.43	3.17	2.00	1.09	0.57	0.19	0.18	
-15	286	279	270	262	253	243	226	169	67.6	18.9	6.72	4.61	3.33	2.13	1.17	0.58	0.19	0.18	
-10	287	282	275	267	258	248	234	187	84.2	23.9	7.32	4.73	3.43	2.23	1.23	0.59	0.19	0.18	
-5	284	282	276	268	261	252	238	197	94.2	28.2	7.66	4.76	3.48	2.28	1.26	0.59	0.20	0.18	
0	285	280	274	268	262	254	240	199	94.3	29.5	7.63	4.72	3.47	2.28	1.26	0.59	0.20	0.18	
5	258	264	264	261	256	249	232	185	87.2	27.0	7.29	4.63	3.40	2.24	1.24	0.59	0.19	0.18	
10	256	252	254	253	250	241	220	162	73.5	21.7	6.64	4.46	3.27	2.15	1.19	0.58	0.19	0.18	
15	253	249	246	246	242	229	198	130	56.8	16.2	5.86	4.24	3.10	2.02	1.12	0.56	0.19	0.18	
20	250	247	243	237	230	208	164	95.2	38.6	11.3	5.16	3.97	2.88	1.87	1.02	0.55	0.18	0.18	
25	246	243	236	225	204	168	118	61.3	23.2	7.59	4.69	3.67	2.65	1.71	0.95	0.53	0.18	0.18	
30	233	227	215	193	155	116	72.0	33.8	12.0	5.59	4.29	3.34	2.40	1.54	0.87	0.50	0.17	0.18	
35	193	183	163	134	100	65.2	35.5	15.2	6.64	4.59	3.77	2.92	2.15	1.37	0.77	0.46	0.17	0.18	
40	123	112	96.2	75.7	51.2	28.8	14.0	6.66	4.75	4.05	3.29	2.52	1.80	1.20	0.68	0.42	0.16	0.18	
45	60.7	53.5	42.3	29.0	17.5	9.48	5.73	4.56	4.05	3.37	2.72	2.14	1.49	0.96	0.59	0.38	0.16	0.18	
50	15.5	13.7	10.7	7.62	5.77	4.84	4.19	3.79	3.24	2.72	2.24	1.70	1.24	0.80	0.51	0.30	0.16	0.18	
55	5.12	4.97	4.71	4.39	4.13	3.84	3.35	2.90	2.50	2.16	1.73	1.30	0.94	0.63	0.44	0.23	0.16	0.18	
60	3.93	3.85	3.71	3.47	3.18	2.81	2.42	2.18	1.91	1.57	1.25	0.99	0.70	0.49	0.37	0.17	0.16	0.18	
65	2.49	2.41	2.29	2.18	2.06	1.91	1.73	1.50	1.24	1.11	0.90	0.67	0.50	0.39	0.26	0.15	0.15	0.18	
70	1.50	1.50	1.46	1.40	1.30	1.15	1.08	0.96	0.85	0.70	0.53	0.43	0.36	0.28	0.16	0.15	0.16	0.18	
75	0.81	0.81	0.80	0.78	0.75	0.69	0.57	0.47	0.40	0.35	0.31	0.27	0.21	0.15	0.14	0.14	0.16	0.18	
80	0.28	0.27	0.26	0.24	0.22	0.21	0.19	0.18	0.16	0.15	0.13	0.11	0.12	0.12	0.13	0.14	0.16	0.18	
85	0.04	0.04	0.05	0.05	0.05	0.06	0.06	0.06	0.06	0.08	0.09	0.10	0.11	0.12	0.13	0.15	0.16	0.18	
90	0.04	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.07	0.08	0.09	0.11	0.12	0.13	0.15	0.16	0.18	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	275.1	275.1	275.1	275.1	275.1	275.1	275.1	275.1
3.0	274.6	279.1	281.2	278.9	274.4	271.1	270.3	271.4
6.0	272.9	282.2	287.3	282.2	272.8	267.5	266.5	268.0
9.0	270.3	283.2	292.3	283.8	270.4	264.2	263.5	264.9
12.0	267.1	282.2	295.3	283.4	267.4	261.2	260.8	262.1
15.0	263.5	279.1	295.4	281.0	264.0	258.4	258.1	259.5
18.0	259.9	274.6	291.9	277.0	260.3	255.8	255.9	256.9
21.0	256.3	269.0	285.3	271.5	256.7	253.3	254.2	254.2
24.0	252.9	262.3	276.7	264.7	253.6	251.2	252.5	251.0
27.0	249.0	254.9	267.0	257.0	250.9	249.2	249.1	246.8
30.0	243.8	247.5	253.7	248.7	247.3	245.2	239.2	239.7
33.0	236.6	240.5	242.1	240.7	242.8	233.5	219.3	224.5
36.0	226.9	232.4	230.4	233.1	235.7	204.4	186.7	195.1
39.0	205.3	218.9	217.9	223.4	207.7	156.4	143.2	149.8
42.0	150.6	203.0	211.3	209.3	143.5	105.0	98.94	105.3
45.0	90.63	130.3	149.8	127.2	76.03	62.74	63.96	64.94
48.0	47.00	55.38	61.17	53.79	36.07	31.02	32.39	33.15
51.0	19.83	25.08	22.49	25.70	13.25	11.70	12.03	14.67
54.0	9.253	12.30	12.98	11.89	6.677	5.766	5.779	6.357
57.0	5.462	7.699	8.724	7.917	5.126	4.825	4.521	4.645
60.0	4.532	6.017	7.237	6.454	4.339	4.128	4.011	4.005
63.0	3.794	4.743	5.362	5.148	3.621	3.334	3.417	3.197
66.0	3.069	3.872	3.804	4.154	2.836	2.743	2.205	2.502
69.0	2.371	3.147	3.068	3.251	2.192	2.328	1.629	1.986
72.0	1.713	2.120	2.262	2.275	1.518	1.738	1.239	1.378
75.0	1.215	1.623	1.302	1.739	0.9879	1.273	0.8095	0.9710
78.0	0.7553	1.040	0.7325	1.009	0.6724	0.6081	0.4748	0.5607
81.0	0.5286	0.6195	0.1690	0.3997	0.3930	0.2605	0.1485	0.2771
84.0	0.2771	0.1683	0.1311	0.1526	0.0706	0.0656	0.0462	0.1016
87.0	0.1589	0.1624	0.1350	0.1547	0.0421	0.0377	0.0403	0.0660
90.0	0.1684	0.1743	0.1552	0.1753	0.0402	0.0396	0.0363	0.0557

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks: