

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	659.9 cd per klm.
(Luminaire orientation as tested.)	-14.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	98.8V x 96.5H
	At 50% of Imax	83.8V x 82.5H
	At 90% of Imax	33.6V x 35.2H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	966.7 lumens per klm.
	To 50% of Imax	865.4 lumens per klm.
	To 90% of Imax	169.9 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:695.203x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-3000K-5AH-高亮	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

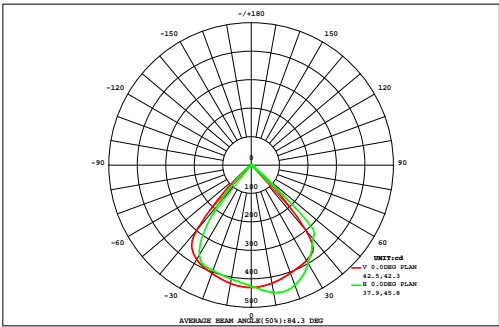

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL	--	Imax(cd)	458.7
NOMINAL POWER(W)		AVAILABILITY(%)	96.7
RATED VOLTAGE(V)		Avai. FLUX(lm)	672.0
NOMINAL FLUX(lm)	695.203	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	695.2
TEST VOLTAGE(V)	--	θ @50%(H,V)	82,84DEG

		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00	
	80	0.00	0.00	0.00	0.01	0.01	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.00	0.00	0.33	0.00	
	70	0.00	0.00	0.01	0.03	0.05	0.08	0.10	0.11	0.12	0.12	0.11	0.10	0.08	0.05	0.03	0.01	0.00	1.00	0.00	
	60	0.00	0.00	0.02	0.05	0.09	0.14	0.18	0.23	0.27	0.27	0.23	0.18	0.14	0.09	0.05	0.02	0.01	1.98	0.00	
	50	0.00	0.01	0.03	0.08	0.14	0.24	0.78	1.82	2.61	2.62	1.87	0.84	0.27	0.14	0.08	0.03	0.01	11.6	8.45	
	40	0.00	0.01	0.04	0.10	0.23	1.33	4.22	7.23	8.61	8.52	7.01	4.14	1.46	0.27	0.11	0.04	0.01	43.3	41.8	
	30	0.00	0.01	0.05	0.13	0.73	4.37	8.89	11.0	11.7	11.6	10.8	8.45	4.36	0.90	0.14	0.06	0.01	73.3	72.2	
		0.00	0.01	0.06	0.16	1.80	7.44	10.5	11.6	12.1	12.1	11.6	10.3	7.20	2.03	0.20	0.06	0.02	87.2	86.4	
		0.00	0.01	0.06	0.20	2.79	8.82	10.8	12.0	12.6	12.6	12.0	10.8	8.57	3.05	0.26	0.07	0.02	94.5	93.8	
		0.00	0.01	0.07	0.22	3.09	9.03	11.0	12.3	13.2	13.2	12.3	10.9	8.84	3.34	0.28	0.07	0.02	97.9	97.2	
		0.00	0.01	0.06	0.20	2.50	8.49	10.8	12.3	13.5	13.5	12.3	10.7	8.36	2.68	0.23	0.07	0.02	95.7	94.8	
	-30	0.00	0.01	0.06	0.16	1.24	6.89	10.1	11.6	12.7	12.7	11.6	10.1	6.81	1.36	0.17	0.06	0.01	85.6	84.5	
	-40	0.00	0.01	0.05	0.13	0.44	3.02	8.32	10.4	11.1	11.1	10.3	8.14	3.02	0.46	0.13	0.05	0.01	66.6	65.2	
	-50	0.00	0.01	0.04	0.10	0.21	0.59	2.10	4.99	6.83	6.81	4.94	2.07	0.58	0.20	0.10	0.04	0.01	29.6	27.2	
-60	0.00	0.01	0.03	0.07	0.14	0.23	0.35	0.54	0.73	0.72	0.53	0.34	0.21	0.13	0.07	0.03	0.01	4.12	0.35		
-70	0.00	0.00	0.01	0.04	0.08	0.12	0.16	0.20	0.23	0.22	0.20	0.16	0.11	0.07	0.04	0.02	0.00	1.67	0.00		
-80	0.00	0.00	0.00	0.01	0.03	0.05	0.06	0.07	0.08	0.08	0.07	0.06	0.04	0.03	0.01	0.01	0.00	0.60	0.00		
-90	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.10	0.00		
		-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)				20	30	40	50	60	70	80	90
Φ t	0.01	0.13	0.60	1.69	13.6	50.9	78.5	96.5	106	106	95.8	77.4	50.1	14.8	1.91	0.64	0.16	0.02	695	---	
Φ a	0.00	0.00	0.00	0.00	11.1	49.1	76.8	94.9	105	105	94.2	75.7	48.3	12.5	0.00	0.00	0.00	0.00	---	672	


one-half-peak spread: U:31.9,D:38.0 , L:41.3,R:41.4 NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:695.203x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-3000K-5AH-高亮	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

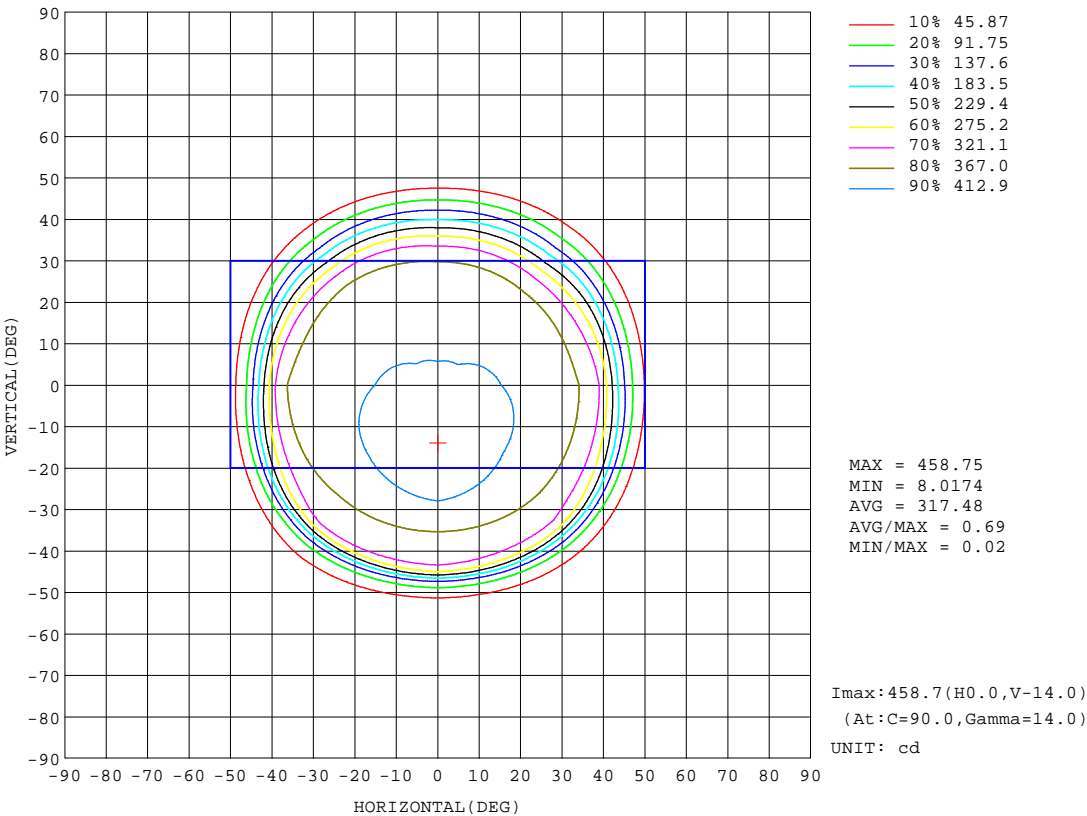


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:695.203x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-3000K-5AH-高亮	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

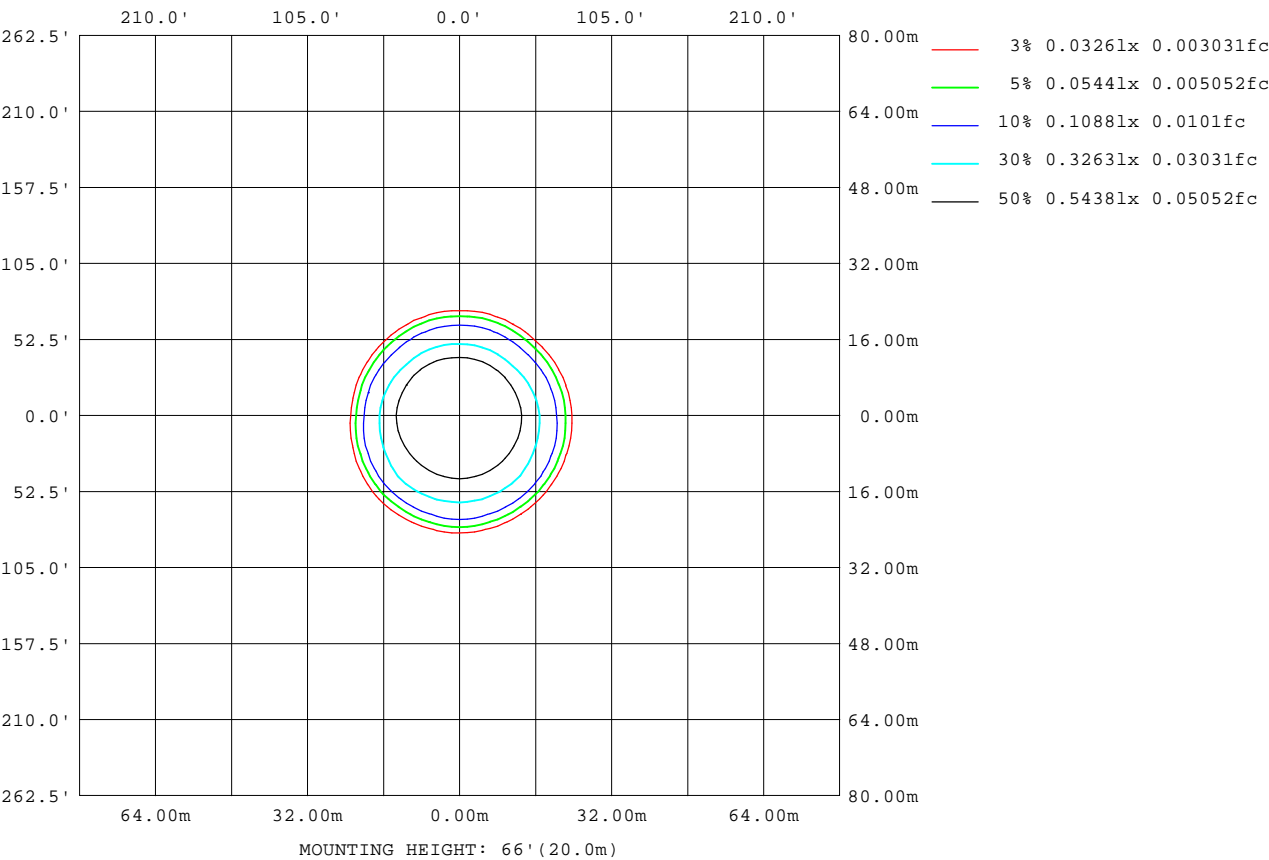

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

Planar Illuminance Curve

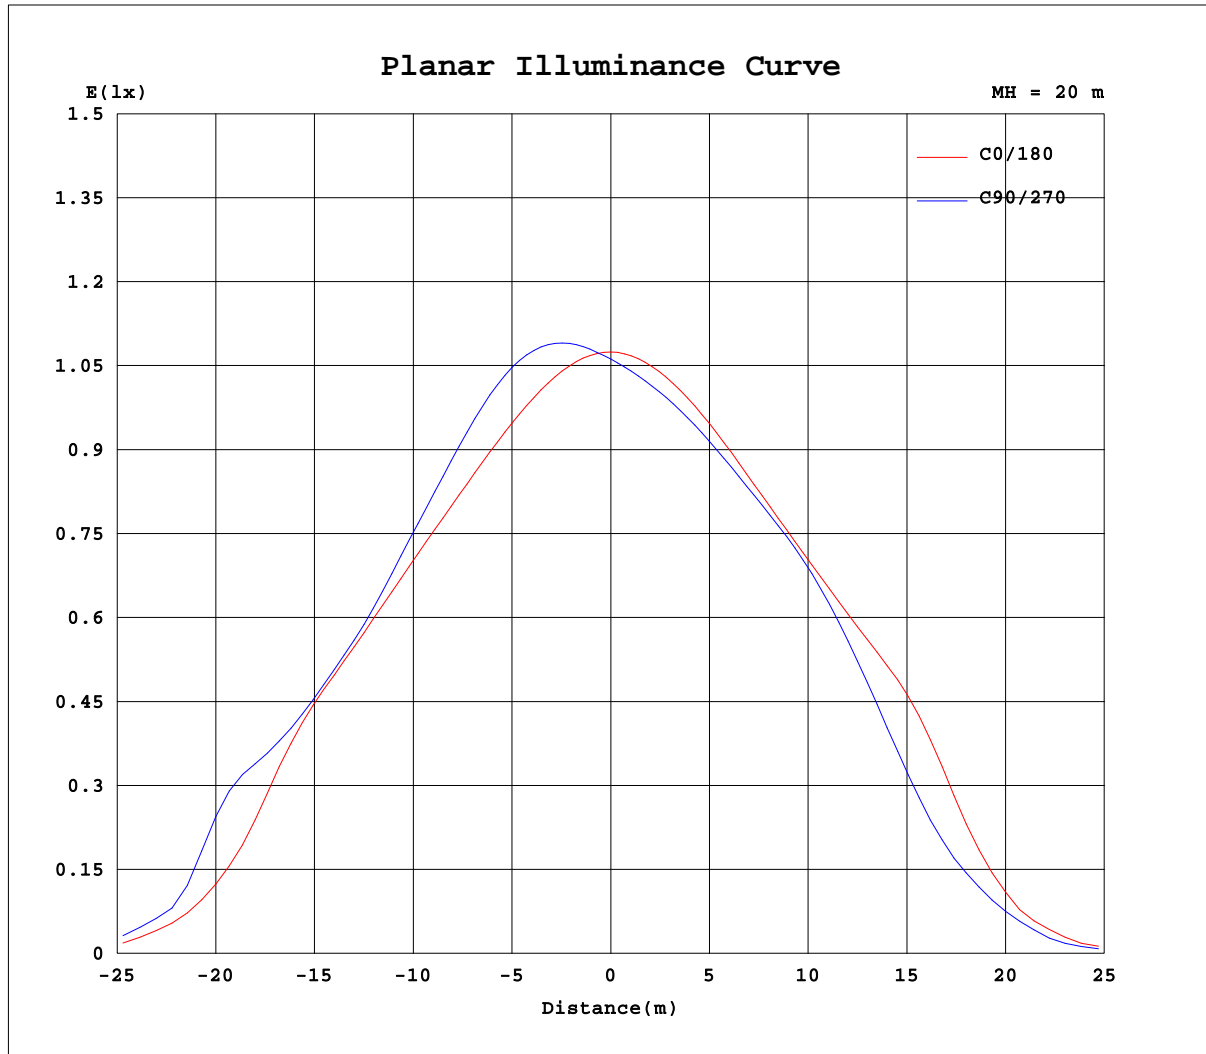


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

AAI Figure

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:695.203x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-3000K-5AH-高亮	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

Flux out:592.3 lm

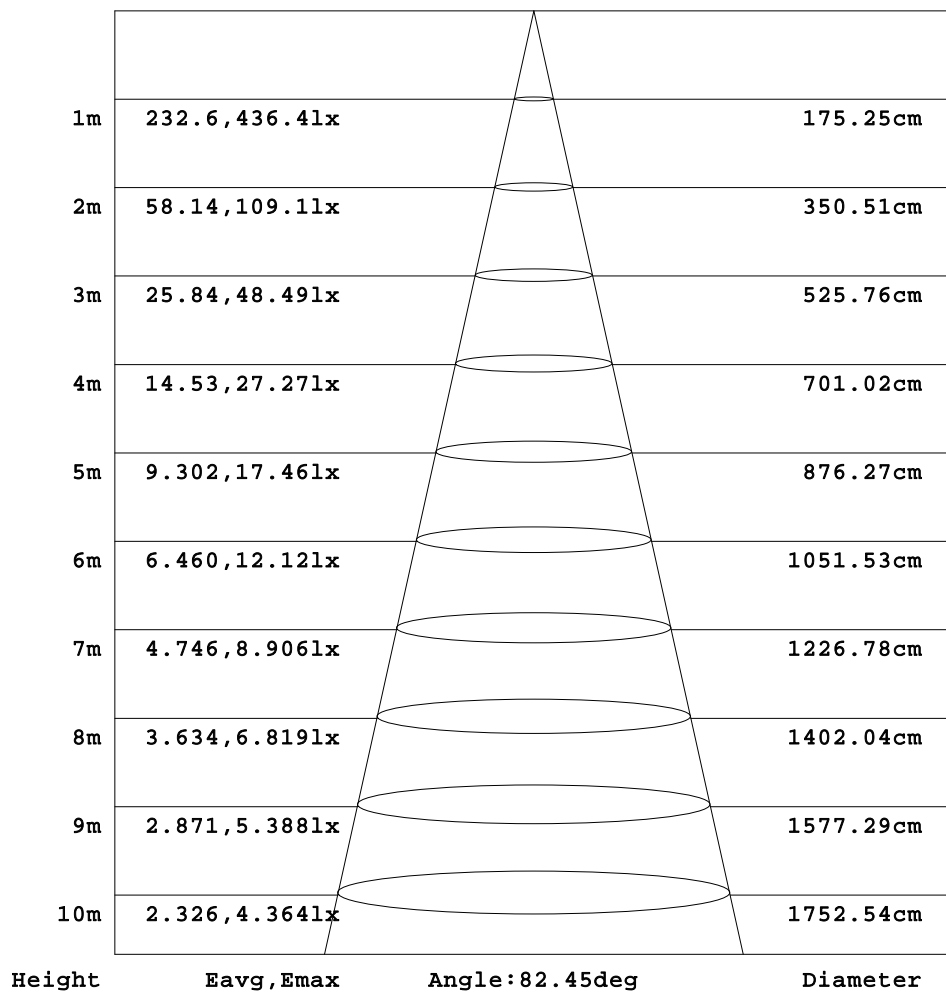

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:695.203x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-3000K-5AH-高亮	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.150*0.105	Shielding Angle:

Table--1

UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.07	0.09	0.11	0.13	0.16	0.18	0.20	0.22	0.25	0.27	0.27	0.26	0.26	0.25	0.25	0.25	0.24	0.24	0.24
-85	0.07	0.09	0.11	0.13	0.15	0.17	0.18	0.20	0.22	0.23	0.23	0.23	0.22	0.22	0.22	0.22	0.21	0.21	0.21
-80	0.07	0.09	0.11	0.13	0.14	0.16	0.19	0.22	0.31	0.43	0.49	0.56	0.66	0.72	0.80	0.86	0.91	0.92	0.91
-75	0.07	0.09	0.11	0.12	0.15	0.24	0.44	0.72	1.07	1.31	1.51	1.82	2.10	2.20	2.24	2.26	2.24	2.20	2.13
-70	0.07	0.09	0.11	0.14	0.29	0.61	1.05	1.35	1.94	2.46	2.79	3.09	3.44	3.72	3.99	4.22	4.40	4.50	4.52
-65	0.07	0.09	0.11	0.20	0.58	1.07	1.55	2.20	2.79	3.40	4.06	4.77	5.43	5.85	6.20	6.53	6.83	7.02	7.08
-60	0.07	0.09	0.12	0.40	0.96	1.46	2.16	2.90	3.72	4.93	6.05	6.75	7.59	8.55	9.62	10.4	11.1	11.5	11.8
-55	0.07	0.09	0.13	0.61	1.15	1.91	2.74	3.73	5.19	6.39	7.74	9.07	10.6	11.8	13.3	15.3	17.3	18.9	19.6
-50	0.07	0.09	0.20	0.84	1.49	2.32	3.36	4.92	6.28	7.86	9.83	11.8	14.8	20.3	29.0	40.5	55.4	66.2	71.0
-45	0.07	0.09	0.31	0.97	1.73	2.76	4.20	5.74	7.47	9.63	12.2	18.7	33.9	60.8	94.4	150	214	257	277
-40	0.07	0.08	0.42	1.10	1.98	3.19	4.92	6.61	8.76	11.4	19.1	44.1	88.7	184	292	329	336	338	338
-35	0.07	0.08	0.51	1.26	2.26	3.69	5.44	7.47	9.91	15.7	39.5	97.1	239	332	345	354	362	367	369
-30	0.07	0.09	0.59	1.38	2.52	4.19	5.97	8.22	11.5	26.3	76.0	216	330	353	366	376	386	394	399
-25	0.07	0.09	0.66	1.46	2.67	4.50	6.45	8.83	14.2	43.0	142	299	351	369	382	396	410	421	428
-20	0.07	0.09	0.73	1.52	2.85	4.69	6.79	9.26	18.8	67.6	218	330	368	381	396	412	427	439	449
-15	0.07	0.09	0.78	1.57	2.98	4.83	6.98	9.65	23.9	96.1	259	354	377	391	406	421	436	448	459
-10	0.07	0.09	0.82	1.59	3.05	4.90	7.04	9.88	28.1	117	282	366	383	397	410	424	436	446	454
-5	0.07	0.09	0.84	1.59	3.07	4.88	6.96	9.77	29.9	129	296	372	386	398	409	421	431	436	440
0	0.07	0.09	0.84	1.57	3.03	4.79	6.78	9.31	28.4	124	297	374	387	396	404	413	421	427	430
5	0.07	0.09	0.83	1.57	3.01	4.74	6.70	9.10	26.5	114	276	365	385	394	400	407	412	413	414
10	0.07	0.09	0.80	1.54	2.95	4.62	6.52	8.68	22.0	92.8	240	347	380	391	396	400	403	406	406
15	0.07	0.08	0.75	1.49	2.84	4.45	6.26	8.16	16.5	69.8	189	313	367	386	391	394	397	399	400
20	0.07	0.08	0.68	1.42	2.67	4.22	5.92	7.67	11.8	46.0	132	252	335	374	386	390	393	394	395
25	0.07	0.08	0.60	1.32	2.46	3.96	5.48	7.15	9.37	24.1	80.3	173	267	334	369	381	386	389	390
30	0.07	0.08	0.53	1.20	2.28	3.64	4.92	6.45	8.02	12.5	41.4	100	175	248	310	344	359	365	365
35	0.07	0.07	0.46	1.08	2.01	3.21	4.41	5.77	7.21	8.82	16.2	46.2	92.5	149	206	252	281	294	294
40	0.07	0.07	0.37	0.93	1.72	2.78	3.94	4.98	6.22	7.46	8.94	15.2	36.9	70.9	106	140	165	179	181
45	0.07	0.07	0.26	0.81	1.46	2.34	3.40	4.29	5.28	6.34	7.35	8.33	10.8	20.5	36.2	56.6	72.4	82.7	85.9
50	0.07	0.07	0.16	0.67	1.14	1.91	2.77	3.70	4.38	5.19	6.03	6.92	7.52	8.33	9.65	12.6	16.4	19.1	19.7
55	0.07	0.07	0.10	0.48	0.87	1.50	2.18	2.95	3.70	4.22	4.76	5.43	6.10	6.64	6.97	7.23	7.46	7.60	7.61
60	0.07	0.07	0.08	0.31	0.69	1.01	1.65	2.21	2.84	3.46	3.87	4.11	4.46	5.01	5.45	5.74	5.95	6.05	6.07
65	0.07	0.07	0.08	0.14	0.42	0.72	0.99	1.57	2.02	2.43	2.89	3.17	3.34	3.44	3.52	3.58	3.62	3.61	3.54
70	0.07	0.07	0.07	0.08	0.18	0.39	0.61	0.80	1.07	1.63	1.91	2.02	2.13	2.26	2.38	2.42	2.39	2.32	2.21
75	0.07	0.07	0.07	0.07	0.08	0.13	0.24	0.36	0.49	0.63	0.75	0.88	1.03	1.23	1.34	1.34	1.31	1.25	1.18
80	0.07	0.07	0.07	0.07	0.07	0.07	0.08	0.09	0.12	0.14	0.19	0.24	0.27	0.29	0.32	0.34	0.34	0.33	0.31
85	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07
90	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:695.203x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-3000K-5AH-高亮	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.150*0.105	Shielding Angle:

Table--2

UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.24	0.24	0.25	0.25	0.26	0.26	0.26	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27
-85	0.21	0.22	0.22	0.23	0.23	0.23	0.24	0.24	0.24	0.25	0.25	0.25	0.26	0.26	0.26	0.27	0.27	0.27
-80	0.91	0.89	0.84	0.80	0.76	0.73	0.66	0.59	0.51	0.41	0.32	0.27	0.26	0.25	0.26	0.26	0.27	0.27
-75	2.18	2.20	2.20	2.18	2.14	2.05	1.89	1.59	1.28	1.06	0.86	0.62	0.43	0.29	0.26	0.26	0.27	0.27
-70	4.50	4.39	4.19	3.91	3.56	3.29	2.94	2.63	2.34	1.95	1.44	1.03	0.79	0.53	0.29	0.26	0.26	0.27
-65	6.95	6.69	6.34	5.94	5.54	5.17	4.72	3.91	3.20	2.68	2.15	1.64	1.08	0.78	0.46	0.27	0.26	0.27
-60	11.4	10.9	10.2	9.28	8.11	7.10	6.30	5.54	4.80	3.64	2.83	2.17	1.56	0.98	0.66	0.28	0.26	0.27
-55	18.9	17.4	15.3	13.1	11.3	9.95	8.46	7.08	5.99	4.94	3.77	2.73	1.94	1.27	0.81	0.39	0.26	0.27
-50	65.8	54.7	39.5	28.2	20.4	14.9	11.1	9.14	7.34	6.00	4.76	3.40	2.38	1.56	0.93	0.51	0.26	0.27
-45	257	213	150	94.6	59.1	32.3	18.9	12.0	9.09	7.10	5.61	4.27	2.81	1.81	1.06	0.63	0.26	0.27
-40	336	332	323	288	181	88.8	42.2	19.8	11.3	8.41	6.45	4.84	3.31	2.14	1.22	0.69	0.26	0.27
-35	367	362	352	339	321	235	99.6	39.8	16.7	9.61	7.27	5.48	3.92	2.39	1.36	0.76	0.27	0.27
-30	394	385	376	366	349	319	216	81.2	28.4	12.0	8.09	6.03	4.27	2.65	1.48	0.81	0.27	0.27
-25	420	409	395	381	368	345	292	149	49.1	16.1	8.70	6.46	4.57	2.85	1.57	0.85	0.28	0.27
-20	438	424	409	393	380	363	324	222	77.0	22.6	9.43	6.82	4.86	3.06	1.66	0.88	0.28	0.27
-15	447	433	417	403	389	373	346	259	108	29.7	10.4	7.08	5.10	3.25	1.77	0.89	0.29	0.27
-10	445	434	422	408	395	379	357	282	132	36.9	11.2	7.23	5.24	3.38	1.84	0.90	0.29	0.27
-5	437	430	420	408	397	383	361	296	144	42.8	11.6	7.25	5.30	3.44	1.88	0.90	0.29	0.27
0	428	422	413	405	396	383	362	298	140	44.0	11.4	7.15	5.27	3.43	1.88	0.90	0.29	0.27
5	413	412	408	401	393	379	351	276	130	40.0	10.9	7.04	5.19	3.39	1.86	0.89	0.29	0.27
10	406	403	401	396	388	370	333	242	109	32.0	9.99	6.82	5.03	3.28	1.80	0.88	0.28	0.27
15	400	398	394	389	379	353	299	193	83.6	23.8	8.89	6.52	4.80	3.10	1.71	0.86	0.28	0.27
20	394	392	387	379	360	317	245	141	57.1	16.7	7.94	6.15	4.50	2.89	1.58	0.83	0.28	0.27
25	388	383	374	355	315	254	174	90.6	33.7	11.4	7.27	5.73	4.16	2.67	1.46	0.80	0.27	0.27
30	362	353	333	295	234	171	106	49.4	17.3	8.57	6.70	5.26	3.81	2.45	1.32	0.75	0.26	0.27
35	290	274	243	198	147	95.7	51.8	21.4	10.1	7.24	5.95	4.67	3.43	2.17	1.19	0.70	0.26	0.27
40	177	163	140	108	73.5	40.8	19.3	10.2	7.54	6.41	5.25	4.09	2.90	1.91	1.06	0.64	0.25	0.27
45	83.3	73.4	58.2	38.8	23.9	13.1	8.87	7.34	6.48	5.45	4.48	3.53	2.47	1.58	0.92	0.57	0.25	0.27
50	19.7	17.6	14.1	10.6	8.76	7.57	6.84	6.16	5.32	4.55	3.77	2.83	2.04	1.25	0.78	0.46	0.24	0.27
55	7.65	7.52	7.24	6.93	6.60	6.17	5.53	4.89	4.30	3.73	2.98	2.26	1.60	1.00	0.67	0.35	0.24	0.27
60	6.06	5.98	5.80	5.50	5.07	4.55	4.16	3.87	3.44	2.79	2.25	1.73	1.13	0.77	0.55	0.25	0.24	0.27
65	3.63	3.64	3.60	3.53	3.44	3.31	3.12	2.76	2.39	2.02	1.64	1.10	0.80	0.59	0.39	0.23	0.24	0.27
70	2.31	2.37	2.37	2.32	2.21	2.10	1.98	1.84	1.66	1.17	0.90	0.69	0.54	0.40	0.23	0.22	0.24	0.27
75	1.25	1.30	1.33	1.34	1.25	1.09	0.97	0.84	0.70	0.57	0.46	0.38	0.30	0.21	0.20	0.22	0.25	0.27
80	0.34	0.36	0.36	0.35	0.33	0.31	0.28	0.24	0.17	0.18	0.17	0.15	0.16	0.18	0.20	0.22	0.25	0.27
85	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.09	0.11	0.14	0.16	0.18	0.20	0.23	0.25	0.27
90	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.09	0.12	0.14	0.16	0.18	0.21	0.23	0.25	0.27

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	426.2	426.2	426.2	426.2	426.2	426.2	426.2	426.2
3.0	425.5	432.0	435.2	431.8	425.2	420.5	419.4	421.0
6.0	423.3	436.7	444.8	437.0	422.8	415.3	413.6	416.1
9.0	419.6	438.6	453.1	440.0	419.2	410.5	409.1	411.6
12.0	415.1	437.3	458.7	440.1	414.8	406.1	405.0	407.4
15.0	410.0	433.2	460.1	437.1	409.6	401.9	400.9	403.6
18.0	404.7	426.7	456.1	431.5	404.0	398.1	397.6	399.6
21.0	399.4	418.4	447.2	423.7	398.7	394.4	395.0	395.3
24.0	394.3	408.4	434.4	413.6	393.9	391.3	392.3	390.2
27.0	388.3	397.5	419.9	402.0	389.5	387.9	385.1	383.2
30.0	380.1	386.3	400.3	389.3	384.1	380.8	366.0	370.1
33.0	368.7	375.6	381.2	376.9	377.3	358.6	329.9	341.8
36.0	353.4	363.6	364.3	365.5	366.3	308.4	274.1	290.0
39.0	317.6	343.5	344.5	350.9	323.0	230.4	204.3	218.2
42.0	231.5	320.4	332.0	334.9	224.2	151.8	141.3	150.3
45.0	139.3	226.3	278.0	230.7	123.3	89.04	86.15	92.59
48.0	72.47	97.64	109.3	97.11	56.92	42.17	37.24	46.39
51.0	30.48	44.27	52.45	47.09	20.94	15.50	14.66	19.50
54.0	14.19	21.25	23.07	21.25	10.40	8.687	8.284	9.475
57.0	8.477	12.76	14.76	12.99	7.940	7.349	6.799	7.320
60.0	7.087	9.641	11.84	10.47	6.722	6.225	6.089	6.328
63.0	5.950	7.591	9.150	8.313	5.646	5.077	4.985	5.197
66.0	4.813	6.200	6.347	6.732	4.416	4.209	3.182	4.266
69.0	3.702	5.040	4.971	5.308	3.427	3.551	2.412	3.515
72.0	2.664	3.397	3.749	3.682	2.383	2.603	1.727	2.528
75.0	1.863	2.612	2.140	2.789	1.554	1.926	1.180	1.858
78.0	1.173	1.857	1.707	1.724	1.084	0.8458	0.6741	0.9863
81.0	0.8242	1.040	0.3555	0.9766	0.6027	0.3463	0.2091	0.4097
84.0	0.4506	0.3105	0.2200	0.2599	0.1064	0.0960	0.0719	0.1125
87.0	0.2568	0.2433	0.2137	0.2381	0.0711	0.0698	0.0680	0.0720
90.0	0.2725	0.2731	0.2358	0.2701	0.0671	0.0658	0.0659	0.0720

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks: