

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	648.8 cd per klm.
(Luminaire orientation as tested.)	19.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	99.5V x 93.8H
	At 50% of Imax	83.9V x 79.9H
	At 90% of Imax	59.5V x 39.5H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	964.9 lumens per klm.
	To 50% of Imax	859.5 lumens per klm.
	To 90% of Imax	274.2 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:436.65x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-6500K-5AH-自动	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

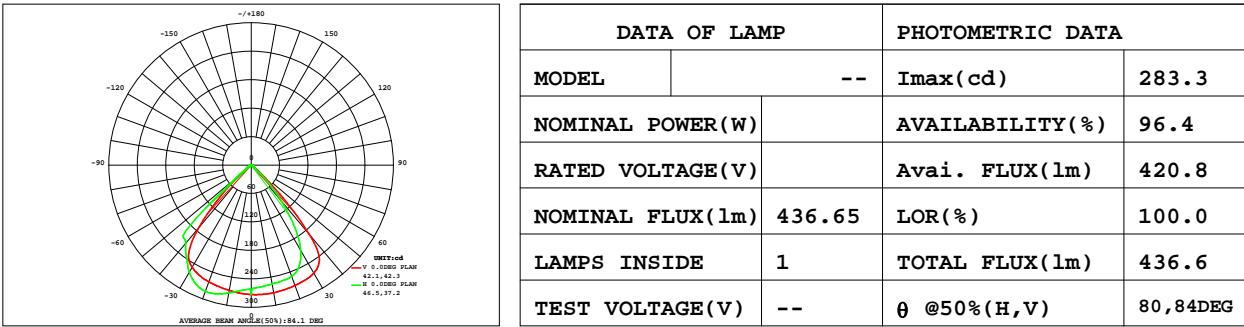

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
80	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.06	0.07	0.07	0.06	0.04	0.03	0.02	0.01	0.00	0.00	0.48	0.00
70	0.00	0.00	0.01	0.03	0.06	0.10	0.14	0.17	0.20	0.20	0.16	0.12	0.08	0.05	0.02	0.01	0.00	1.35	0.00
60	0.00	0.00	0.02	0.05	0.11	0.18	0.27	0.40	0.54	0.54	0.39	0.24	0.14	0.09	0.04	0.02	0.00	3.03	0.30
50	0.00	0.01	0.03	0.07	0.16	0.37	1.31	3.28	4.53	4.46	3.11	1.24	0.34	0.13	0.07	0.03	0.01	19.1	17.5
40	0.00	0.01	0.04	0.10	0.27	1.87	5.43	6.78	7.20	7.12	6.53	4.95	1.70	0.27	0.09	0.03	0.01	42.4	41.5
30	0.00	0.01	0.04	0.11	0.75	4.48	6.74	7.65	8.24	8.08	7.27	6.32	4.09	0.78	0.11	0.04	0.01	54.7	54.0
	0.00	0.01	0.04	0.13	1.58	5.59	7.19	8.00	8.43	8.20	7.47	6.74	5.17	1.57	0.14	0.05	0.01	60.3	59.8
	0.00	0.01	0.04	0.14	1.97	6.00	7.36	8.01	8.22	7.95	7.67	6.99	5.54	1.98	0.17	0.05	0.01	62.1	61.6
	0.00	0.01	0.04	0.13	1.77	5.76	7.20	7.71	7.79	7.92	7.66	6.96	5.32	1.82	0.17	0.05	0.01	60.3	59.8
	0.00	0.01	0.04	0.10	1.13	4.67	6.68	7.31	7.60	7.68	7.37	6.46	4.32	1.22	0.13	0.04	0.01	54.8	54.2
	0.00	0.01	0.03	0.08	0.46	2.70	5.27	6.63	7.11	7.10	6.52	4.97	2.57	0.55	0.09	0.04	0.01	44.1	43.5
-30	0.00	0.01	0.03	0.07	0.15	0.83	2.52	4.12	4.80	4.74	3.97	2.41	0.88	0.18	0.07	0.03	0.01	24.8	23.8
-40	0.00	0.00	0.02	0.05	0.09	0.16	0.48	1.07	1.48	1.47	1.08	0.52	0.19	0.10	0.05	0.02	0.01	6.80	4.79
-50	0.00	0.00	0.01	0.03	0.06	0.09	0.12	0.15	0.17	0.17	0.16	0.13	0.10	0.06	0.04	0.01	0.00	1.30	0.00
-60	0.00	0.00	0.01	0.02	0.03	0.05	0.06	0.07	0.08	0.08	0.07	0.07	0.05	0.04	0.02	0.01	0.00	0.66	0.00
-70	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.22	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.07	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Φ t	0.00	0.09	0.41	1.13	8.62	32.9	50.9	61.5	66.5	65.8	59.5	48.2	30.5	8.85	1.24	0.43	0.11	0.01	437
Φ a	0.00	0.00	0.00	0.00	6.96	31.7	49.7	60.3	65.4	64.7	58.4	47.1	29.3	7.31	0.00	0.00	0.00	0.00	421


one-half-peak spread: U:37.3,D:27.7 , L:40.3,R:39.7 NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:436.65x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-6500K-5AH-自动	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

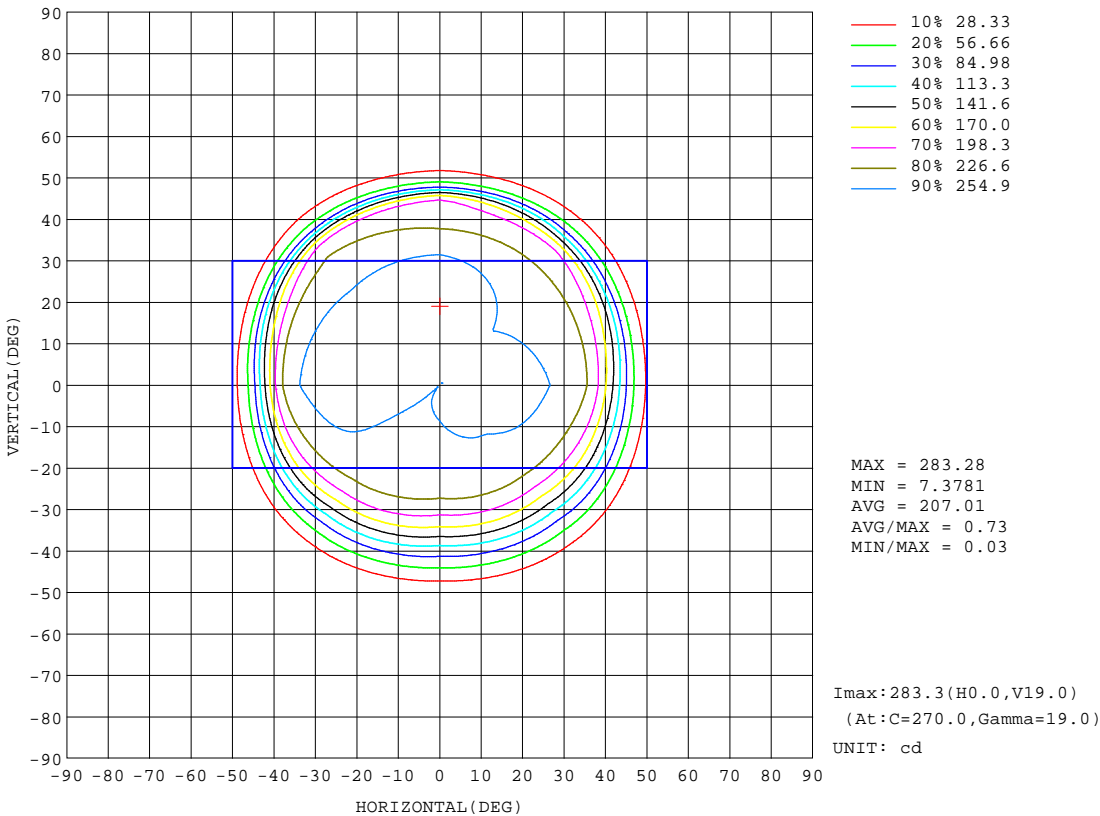


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:436.65x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-6500K-5AH-自动	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

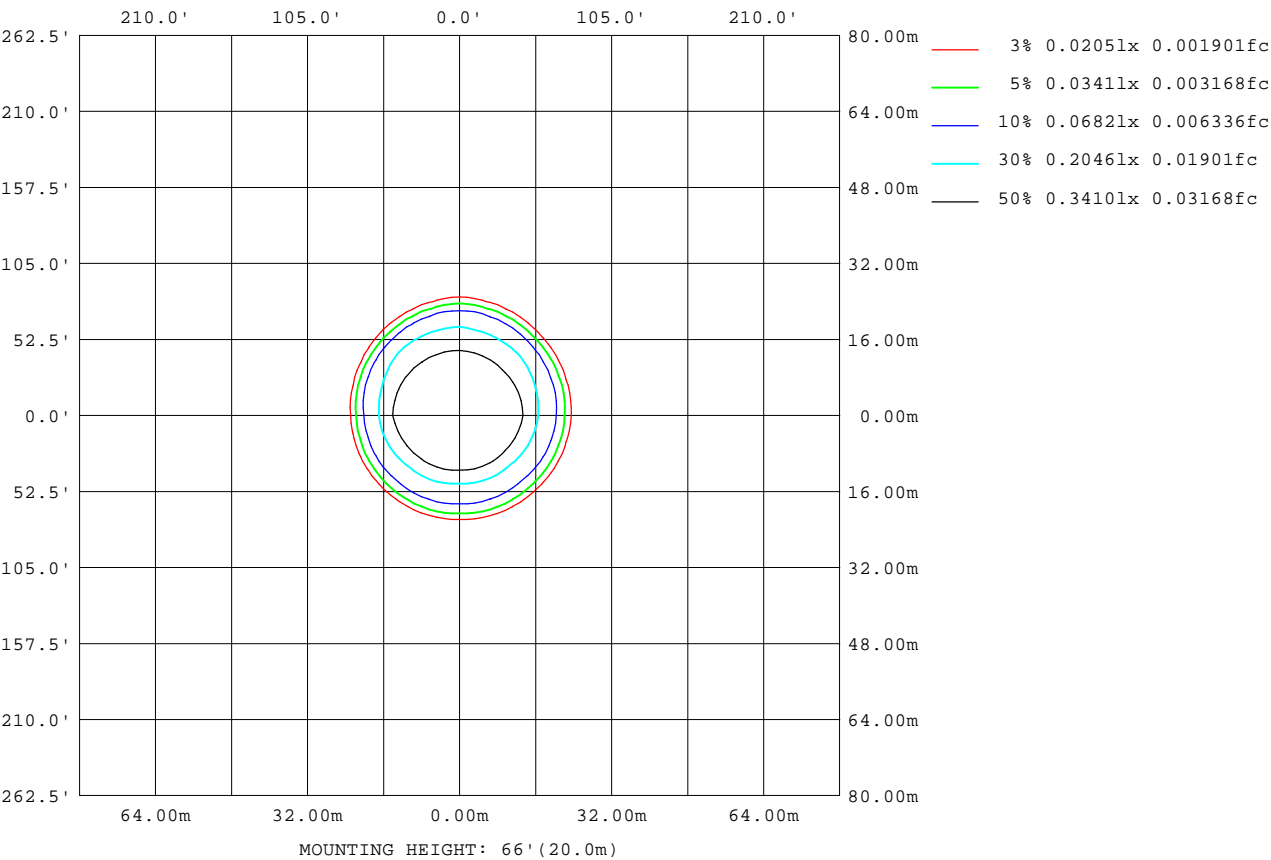

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

Planar Illuminance Curve

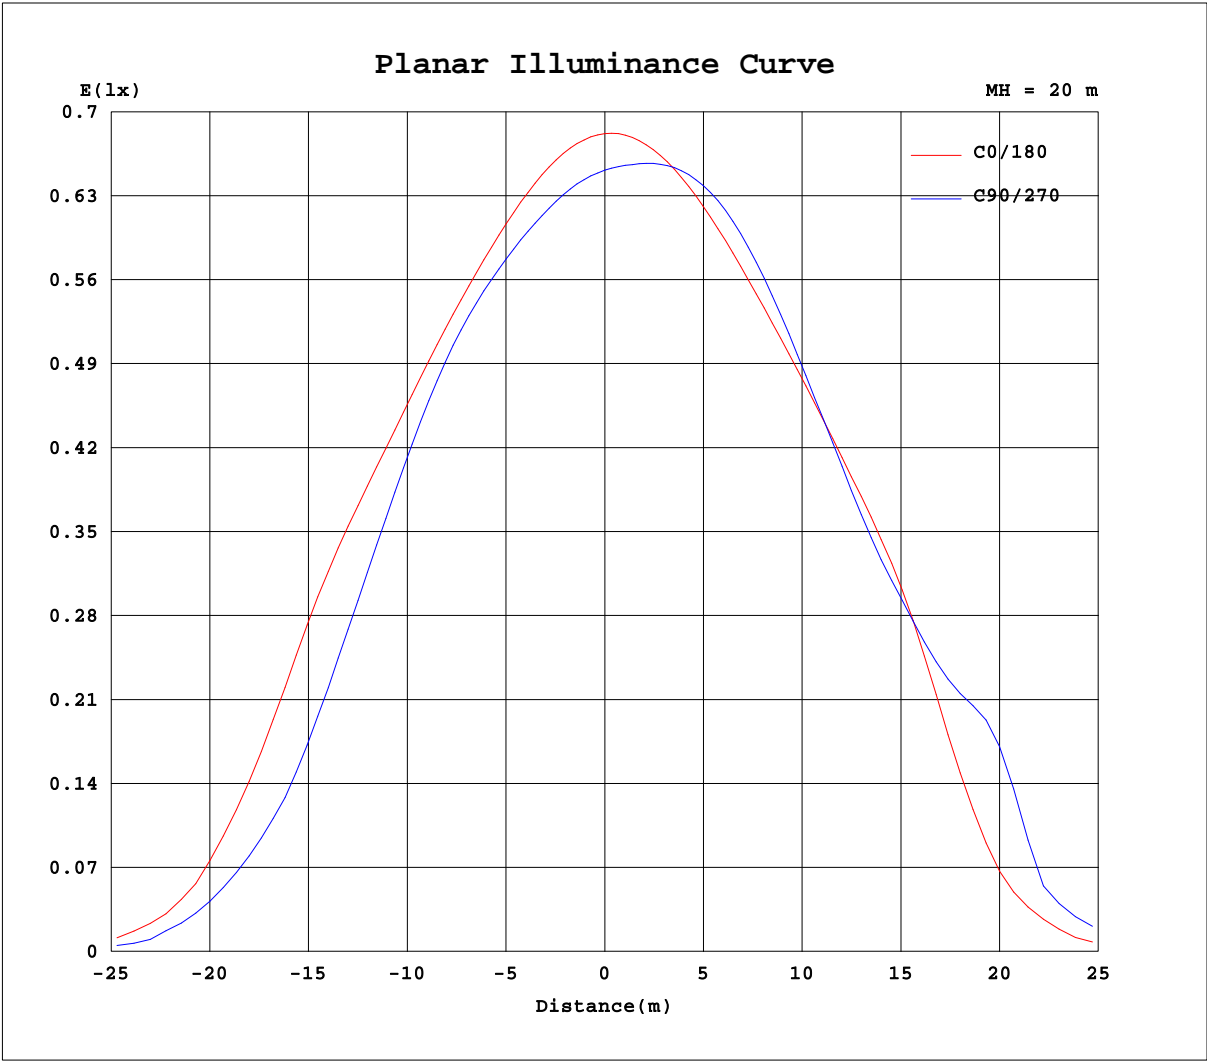


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

AAI Figure

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:436.65x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-6500K-5AH-自动	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.:0.150*0.105	Shielding Angle:

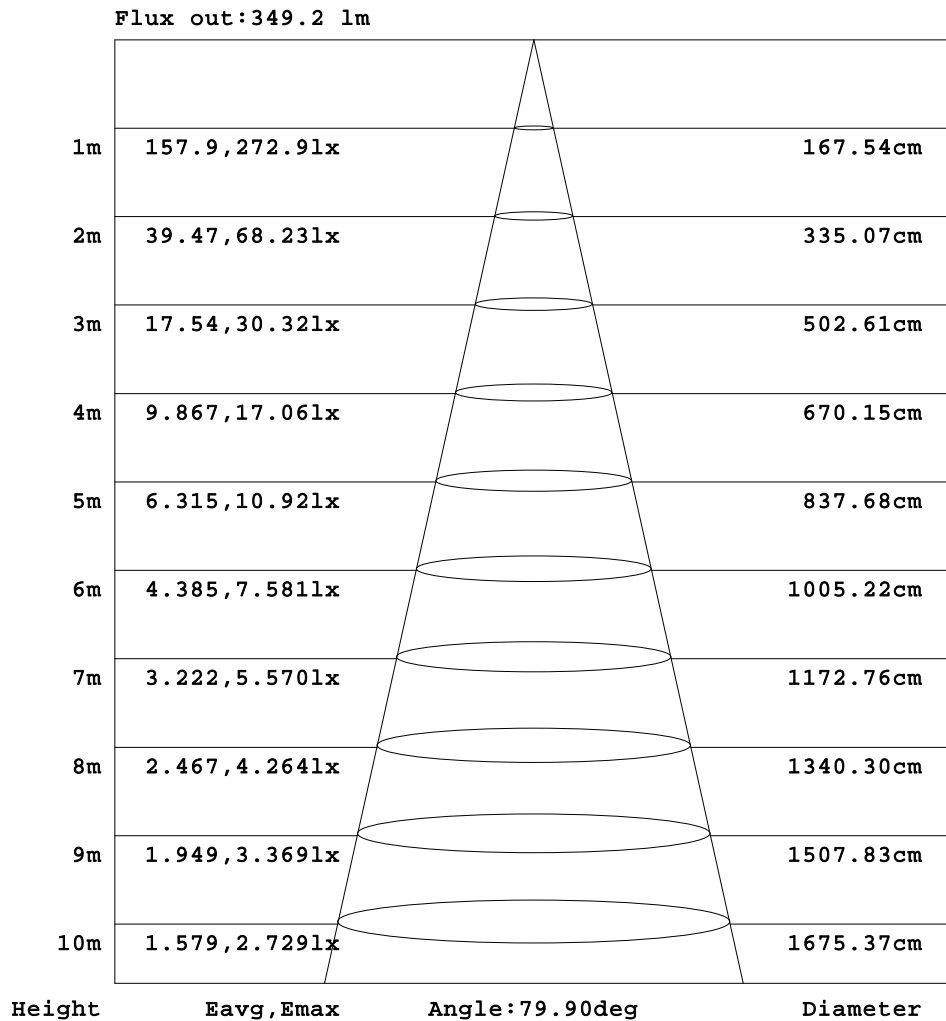

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:436.65x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-6500K-5AH-自动	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.150*0.105	Shielding Angle:

Table--1

UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.04	0.06	0.07	0.09	0.11	0.13	0.15	0.16	0.18	0.20	0.21	0.21	0.22	0.22	0.22	0.23	0.23	0.24	0.24
-85	0.04	0.06	0.07	0.09	0.10	0.11	0.13	0.14	0.15	0.16	0.16	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17
-80	0.04	0.06	0.07	0.08	0.10	0.11	0.13	0.14	0.16	0.19	0.21	0.23	0.25	0.26	0.29	0.31	0.32	0.33	0.33
-75	0.04	0.06	0.07	0.08	0.10	0.13	0.20	0.27	0.35	0.42	0.49	0.57	0.69	0.75	0.77	0.76	0.74	0.70	0.65
-70	0.04	0.05	0.07	0.09	0.14	0.28	0.42	0.52	0.71	0.97	1.11	1.21	1.31	1.39	1.45	1.47	1.44	1.39	1.30
-65	0.04	0.05	0.07	0.11	0.29	0.48	0.63	0.95	1.21	1.50	1.83	2.03	2.11	2.17	2.23	2.29	2.35	2.37	2.34
-60	0.04	0.05	0.07	0.20	0.46	0.64	1.00	1.36	1.81	2.24	2.48	2.64	2.91	3.25	3.51	3.71	3.83	3.88	3.89
-55	0.04	0.05	0.08	0.32	0.56	0.92	1.36	1.92	2.38	2.72	3.07	3.52	3.95	4.29	4.55	4.72	4.87	4.95	4.93
-50	0.04	0.05	0.11	0.45	0.73	1.18	1.80	2.39	2.84	3.35	3.93	4.50	4.95	5.52	6.39	7.93	9.57	10.6	10.6
-45	0.04	0.05	0.15	0.53	0.90	1.50	2.22	2.79	3.41	4.12	4.83	5.57	7.47	12.7	22.3	32.8	41.4	46.7	47.6
-40	0.04	0.05	0.22	0.59	1.07	1.83	2.56	3.23	4.06	4.90	5.95	10.2	23.0	42.6	63.9	81.8	94.2	99.8	98.8
-35	0.04	0.05	0.29	0.67	1.27	2.12	2.88	3.74	4.70	5.83	10.7	28.7	57.2	89.4	120	143	157	162	160
-30	0.04	0.05	0.35	0.77	1.46	2.38	3.20	4.21	5.27	8.33	26.0	61.9	106	146	177	197	207	211	209
-25	0.04	0.05	0.41	0.84	1.63	2.59	3.55	4.67	6.14	15.3	49.9	107	162	196	218	230	235	238	237
-20	0.04	0.05	0.45	0.89	1.78	2.77	3.85	5.04	7.68	29.1	83.0	157	204	228	239	244	247	249	250
-15	0.04	0.05	0.49	0.94	1.90	2.92	4.08	5.36	10.4	43.8	120	196	230	245	250	248	249	251	253
-10	0.04	0.05	0.52	0.98	1.97	3.05	4.25	5.68	13.8	58.1	152	222	246	255	257	254	249	252	254
-5	0.04	0.05	0.54	1.00	2.02	3.13	4.38	5.92	16.6	70.1	176	239	256	262	263	262	260	252	257
0	0.04	0.05	0.55	1.00	2.03	3.17	4.43	6.04	17.7	75.9	191	250	263	268	270	272	273	274	273
5	0.04	0.05	0.55	1.04	2.08	3.26	4.62	6.39	18.3	80.0	190	248	261	268	271	273	273	270	266
10	0.04	0.05	0.54	1.05	2.09	3.31	4.72	6.53	16.8	73.8	182	242	258	266	271	274	275	274	274
15	0.04	0.05	0.52	1.05	2.07	3.30	4.74	6.49	14.2	58.5	167	233	252	262	268	273	277	279	281
20	0.04	0.05	0.49	1.03	2.01	3.24	4.68	6.38	11.3	41.6	141	216	244	255	262	270	276	280	283
25	0.04	0.05	0.44	0.99	1.91	3.11	4.50	6.18	9.17	24.8	90.0	193	232	245	253	262	268	273	277
30	0.04	0.05	0.38	0.92	1.79	2.91	4.22	5.81	7.84	15.4	45.9	140	214	235	242	248	254	259	261
35	0.04	0.05	0.31	0.83	1.63	2.62	3.90	5.36	7.11	10.3	22.3	59.7	156	215	226	233	236	238	238
40	0.04	0.05	0.23	0.75	1.46	2.35	3.52	4.81	6.36	8.19	12.1	24.6	53.2	121	192	211	215	216	215
45	0.04	0.04	0.14	0.68	1.27	2.07	3.02	4.22	5.55	7.09	8.86	12.3	20.3	34.9	59.1	103	151	180	193
50	0.04	0.04	0.09	0.57	1.03	1.78	2.56	3.57	4.69	5.96	7.38	8.88	10.8	14.1	19.2	26.4	34.2	40.7	44.1
55	0.04	0.04	0.06	0.39	0.82	1.46	2.14	2.86	3.83	4.86	5.95	7.01	8.23	9.38	10.6	12.1	13.7	15.1	16.0
60	0.04	0.04	0.05	0.20	0.67	1.02	1.72	2.33	2.96	3.70	4.63	5.34	6.11	6.86	7.69	8.55	9.27	9.85	10.3
65	0.04	0.04	0.05	0.08	0.37	0.78	1.10	1.78	2.34	2.84	3.33	3.80	4.39	4.88	5.31	5.71	6.10	6.41	6.60
70	0.04	0.04	0.04	0.05	0.10	0.39	0.76	1.04	1.43	2.07	2.47	2.68	2.92	3.29	3.65	3.94	4.17	4.35	4.48
75	0.04	0.04	0.04	0.04	0.05	0.08	0.21	0.47	0.76	1.04	1.20	1.37	1.66	1.95	2.18	2.29	2.35	2.38	2.39
80	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.06	0.07	0.10	0.27	0.36	0.40	0.41	0.47	0.50	0.50	0.48	0.44
85	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03
90	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: 1
Test Date: 2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 6.790m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:436.65x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 荣星透镜感应3CCT-6500K-5AH-自动	DIM.: 0.200*0.175	SERIAL No.:
MFR.: EVERFINE	SUR.: 0.150*0.105	Shielding Angle:

Table--2																		UNIT: cd	
H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.24	0.24	0.24	0.24	0.24	0.24	0.24	0.23	0.23	0.23	0.22	0.21	0.20	0.20	0.19	0.18	0.17	0.17	
-85	0.18	0.18	0.18	0.18	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.18	0.18	0.18	0.18	0.17	0.17	
-80	0.34	0.34	0.34	0.34	0.32	0.31	0.29	0.27	0.27	0.24	0.22	0.19	0.18	0.18	0.17	0.17	0.17	0.17	
-75	0.71	0.77	0.81	0.83	0.84	0.82	0.72	0.59	0.49	0.44	0.37	0.32	0.26	0.20	0.17	0.17	0.17	0.17	
-70	1.42	1.51	1.57	1.60	1.59	1.51	1.38	1.23	1.11	0.89	0.62	0.48	0.39	0.31	0.20	0.17	0.17	0.17	
-65	2.40	2.41	2.38	2.35	2.32	2.29	2.23	2.12	1.79	1.40	1.11	0.79	0.54	0.41	0.28	0.18	0.17	0.17	
-60	3.93	3.92	3.82	3.65	3.41	3.11	2.86	2.71	2.48	2.12	1.60	1.17	0.80	0.51	0.37	0.19	0.17	0.17	
-55	5.03	5.03	4.92	4.77	4.59	4.26	3.76	3.34	2.98	2.63	2.21	1.60	1.10	0.67	0.44	0.24	0.16	0.17	
-50	11.0	10.4	8.90	7.26	6.07	5.37	4.90	4.29	3.61	3.12	2.64	2.09	1.40	0.89	0.51	0.30	0.16	0.17	
-45	46.7	41.7	33.6	23.9	14.8	9.14	6.31	5.25	4.52	3.69	3.07	2.48	1.76	1.09	0.60	0.36	0.17	0.17	
-40	98.5	92.0	79.8	62.9	43.4	25.3	12.9	7.03	5.33	4.41	3.55	2.82	2.11	1.30	0.70	0.40	0.17	0.17	
-35	160	152	137	114	85.6	56.9	31.5	13.9	6.90	5.07	4.02	3.19	2.41	1.50	0.81	0.44	0.17	0.17	
-30	209	203	190	168	136	99.9	63.6	29.8	11.2	5.93	4.57	3.54	2.63	1.72	0.93	0.47	0.18	0.17	
-25	237	234	226	210	184	149	102	54.0	20.6	7.57	5.01	3.85	2.86	1.89	1.02	0.49	0.18	0.17	
-20	250	248	244	235	218	189	143	85.2	33.7	10.6	5.46	4.13	3.07	2.06	1.10	0.52	0.19	0.17	
-15	254	253	251	248	237	217	178	115	49.9	14.7	6.04	4.40	3.25	2.19	1.17	0.54	0.19	0.17	
-10	256	256	256	254	248	233	203	141	65.1	19.5	6.68	4.59	3.39	2.28	1.23	0.55	0.19	0.17	
-5	261	262	261	259	253	243	220	160	78.7	23.9	7.20	4.72	3.49	2.34	1.26	0.56	0.19	0.17	
0	271	268	265	262	257	249	231	172	85.9	26.1	7.46	4.78	3.53	2.36	1.27	0.57	0.19	0.17	
5	257	262	261	259	254	246	229	174	85.9	25.3	7.51	4.83	3.55	2.36	1.28	0.57	0.19	0.17	
10	265	257	257	255	250	242	223	168	76.9	21.9	7.21	4.81	3.52	2.32	1.26	0.56	0.19	0.17	
15	271	262	253	250	245	237	213	155	61.8	17.6	6.66	4.71	3.43	2.24	1.21	0.55	0.19	0.17	
20	273	263	252	243	239	228	199	128	44.3	13.3	6.12	4.53	3.28	2.12	1.15	0.53	0.18	0.17	
25	268	258	248	239	231	215	177	84.4	28.4	9.75	5.71	4.31	3.08	1.95	1.07	0.50	0.17	0.17	
30	255	247	239	230	220	197	120	46.4	16.6	7.38	5.31	4.02	2.84	1.80	0.96	0.47	0.17	0.17	
35	235	231	224	215	197	128	57.1	23.1	10.0	6.21	4.80	3.65	2.60	1.62	0.86	0.44	0.16	0.17	
40	214	210	200	171	109	51.2	24.3	11.6	6.98	5.48	4.29	3.23	2.26	1.44	0.76	0.40	0.16	0.17	
45	176	146	99.3	57.6	34.5	19.4	11.1	7.27	5.88	4.71	3.72	2.79	1.91	1.22	0.65	0.34	0.15	0.17	
50	40.7	34.1	26.0	18.7	13.3	9.37	7.19	5.90	4.87	3.97	3.10	2.30	1.60	0.96	0.54	0.28	0.15	0.17	
55	14.9	13.3	11.4	9.64	8.24	6.96	5.69	4.69	3.95	3.20	2.50	1.83	1.30	0.76	0.45	0.22	0.15	0.17	
60	9.64	8.86	7.96	6.95	6.00	5.19	4.38	3.67	3.04	2.43	1.88	1.44	0.91	0.57	0.35	0.17	0.15	0.17	
65	6.27	5.83	5.31	4.80	4.29	3.76	3.24	2.65	2.13	1.78	1.41	0.94	0.64	0.42	0.24	0.15	0.15	0.17	
70	4.27	4.01	3.71	3.31	2.83	2.38	2.07	1.81	1.51	1.07	0.81	0.58	0.40	0.25	0.16	0.14	0.15	0.17	
75	2.30	2.19	2.06	1.91	1.63	1.32	1.08	0.89	0.71	0.54	0.40	0.28	0.19	0.14	0.13	0.14	0.15	0.17	
80	0.45	0.44	0.41	0.37	0.31	0.30	0.28	0.23	0.14	0.12	0.11	0.11	0.10	0.11	0.12	0.14	0.15	0.17	
85	0.04	0.04	0.04	0.04	0.05	0.05	0.04	0.04	0.04	0.06	0.07	0.08	0.10	0.11	0.13	0.14	0.15	0.17	
90	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.07	0.08	0.10	0.11	0.12	0.14	0.15	0.17	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2025-10-25

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	263.2	263.2	263.2	263.2	263.2	263.2	263.2	263.2
3.0	262.2	261.3	261.1	262.1	263.8	265.4	265.9	264.2
6.0	261.1	259.5	259.1	260.9	263.9	267.9	269.9	265.4
9.0	259.4	257.7	257.3	259.6	263.7	270.4	274.8	266.2
12.0	257.6	255.9	256.1	258.2	263.1	272.2	279.7	266.1
15.0	255.8	254.3	255.2	257.3	262.3	273.1	283.7	265.3
18.0	254.0	252.3	254.0	256.7	261.3	272.8	286.0	263.7
21.0	252.1	249.8	251.0	255.9	260.1	271.3	285.4	261.0
24.0	249.3	245.3	243.4	254.0	258.9	267.9	281.5	257.2
27.0	245.4	236.9	230.4	248.8	257.3	262.7	274.3	252.7
30.0	240.1	221.7	210.9	237.5	254.0	255.8	263.9	247.8
33.0	232.1	197.7	184.2	216.5	248.3	247.8	249.6	242.6
36.0	215.6	165.2	149.8	183.8	236.0	240.4	236.1	235.5
39.0	181.1	126.6	110.6	141.9	202.7	230.7	222.1	224.6
42.0	133.5	87.01	78.76	95.19	140.2	214.9	212.0	202.3
45.0	82.86	54.48	48.12	56.76	73.26	149.5	195.2	127.1
48.0	40.73	28.41	23.51	27.08	35.03	59.81	73.78	58.73
51.0	18.04	12.95	8.237	10.76	12.56	25.84	34.35	26.26
54.0	8.652	6.660	5.370	6.026	6.534	13.22	18.54	12.66
57.0	5.568	5.220	4.450	4.995	5.089	9.358	12.75	7.839
60.0	4.608	4.419	3.924	4.174	4.276	7.779	10.36	6.391
63.0	3.873	3.502	3.294	3.379	3.569	6.356	7.798	5.196
66.0	3.168	2.929	2.025	2.793	2.836	5.134	6.011	4.203
69.0	2.447	2.505	1.444	2.367	2.203	3.949	4.836	3.278
72.0	1.790	1.947	1.044	1.670	1.556	3.057	3.576	2.363
75.0	1.230	1.232	0.6570	1.158	0.9672	2.427	2.412	1.795
78.0	0.7568	0.7288	0.4376	0.5675	0.6409	1.282	1.191	1.019
81.0	0.4830	0.3813	0.2423	0.2756	0.3981	0.5965	0.1323	0.4423
84.0	0.2664	0.2058	0.1731	0.1729	0.0670	0.0635	0.0441	0.0706
87.0	0.1557	0.1901	0.1930	0.1730	0.0422	0.0396	0.0362	0.0433
90.0	0.1614	0.2316	0.2454	0.2080	0.0365	0.0436	0.0362	0.0391

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2025-10-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks: